



features

- Surface mount
- Flat top suitable for high speed pick-and-place components
- Excellent high frequency applications
- High Q factors and self-resonant frequency values
- Marking: White body color with no marking (0402)
Black body color with white marking (0603, 0805, 1008)
- Products with lead-free terminations meet EU RoHS requirements

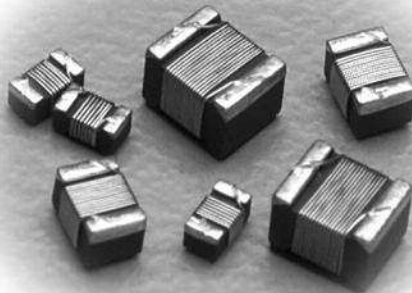

dimensions and construction

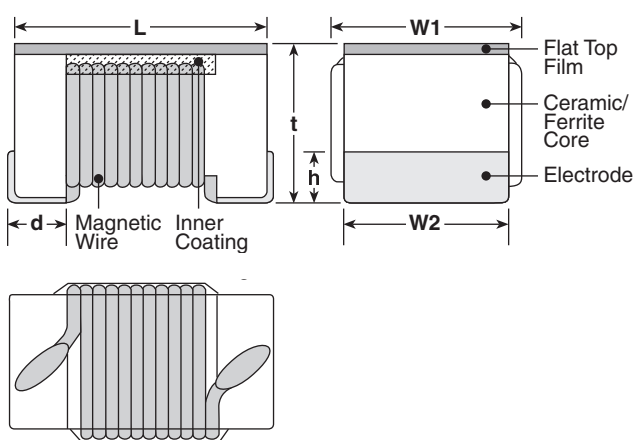

| Size Code | Dimensions inches (mm) | | | | | |
|-----------|------------------------|---|-------------------------|--|--------------------------|-------------------------|
| | L | W1 | W2 | t | h | d |
| KQT0402 | .039±.004 (1.0±0.1) | .02±.004 (0.5±0.1) | .02±.004 (0.5±0.1) | .022±.004 (0.55±0.1) | .006±.004 (0.15±0.1) | .01±.004 (0.25±0.1) |
| KQ0603 | .063±.004 (1.6±0.1) | .039±.004 (1.0±0.1) | .033±.004 (0.85±0.1) | .035±.004 (0.9±0.1) | .01±.006 (0.25±0.15) | .014±.004 (0.35±0.1) |
| KQ0805 | .079±.008 (2.0±0.2) | .059±.008 (1.5±0.2) (3.3nH-390nH) | .053±.004 (1.35±0.1) | .051±.008 (1.3±0.2) | .016±.006 (0.40±0.15) | .018±.004 (0.45±0.1) |
| | | .063±.008 (1.6±0.2) (470nH-820nH) | | | | |
| KQ1008 | .098±.008 (2.5±0.2) | .087±.008 (2.2±0.2) | .079±.004 (2.0±0.1) | .071 ^{+0.008} ₋₀ (1.8 ^{+0.2} ₋₀) | .018±.006 (0.45±0.15) | .018±.004 (0.45±0.1) |

ordering information

| New Part # | KQ | 1008 | T | TE | 10N | J |
|------------|-----------|---|-------------------------------|---|--|--|
| Type | KQ KQT | Size Code 0402 0603 0805 1008 | Termination Material T: Sn | Packaging TP: 2mm pitch paper (0402: 10,000 pieces/reel) TD: 7" paper tape (0402: 2,000 pieces/reel) TE: 7" embossed plastic (0603, 0805, 1008: 2,000 pieces/reel) | Nominal Inductance 3 digits: 10N: 10nH R10: 0.1µH 1R0: 1.0µH | Tolerance B: ±0.1nH C: 0.2nH G: ±2% H: ±3% J: ±5% K: ±10% M: ±20% |

For further information on packaging, please refer to Appendix A.

applications and ratings

| Part Designation | Marking | Nominal Inductance (nH) | L Measuring Frequency | Inductance Tolerance | Q Quality Factor Minimum | Q Measuring Frequency (MHz) | Self Resonant Frequency Minimum (MHz) | DC Resistance Maximum (Ω) | Allowable DC Current Maximum (mA) |
|------------------|---------|-------------------------|-----------------------|------------------------------------|--------------------------|-----------------------------|---------------------------------------|------------------------------------|-----------------------------------|
| KQT0402T**1N0* | — | 1.0 | 250 | B: ± 0.1 nH C: ± 0.2 nH | 16 | 250 | 11000 | 0.045 | 1360 |
| KQT0402T**1N9* | | 1.9 | | | | | 9600 | 0.070 | 1040 |
| KQT0402T**2N0* | | 2.0 | | | | | | | |
| KQT0402T**2N2* | | 2.2 | | | | | | | |
| KQT0402T**2N4* | | 2.4 | | | 8000 | | 0.068 | 960 | |
| KQT0402T**2N7* | | 2.7 | | | | | | | |
| KQT0402T**3N3* | | 3.3 | | | 7200 | | 0.066 | 840 | |
| KQT0402T**3N6* | | 3.6 | | | | | | | |
| KQT0402T**3N9* | | 3.9 | | | | | | | |
| KQT0402T**4N3* | | 4.3 | | | | | | | |
| KQT0402T**4N7* | | 4.7 | | | 6000 | | 0.091 | 800 | |
| KQT0402T**5N1* | | 5.1 | | | | | | | |
| KQT0402T**5N6* | | 5.6 | | | 5800 | | 0.083 | 760 | |
| KQT0402T**6N2* | | 6.2 | | | | | | | |
| KQT0402T**6N8* | | 6.8 | | | | | | | |
| KQT0402T**7N5* | | 7.5 | | | | | | | |
| KQT0402T**8N2* | | 8.2 | | 5800 | 0.104 | | 680 | | |
| KQT0402T**8N7* | | 8.7 | | | | | | | |
| KQT0402T**9N0* | | 9.0 | | 4200 | 0.150 | | 650 | | |
| KQT0402T**9N5* | | 9.5 | | | | | | | |
| KQT0402T**10N* | | 10 | | 4160 | 0.104 | | 680 | | |
| KQT0402T**11N* | | 11 | | | | | | | |
| KQT0402T**12N* | | 12 | | 3900 | 0.195 | | 480 | | |
| KQT0402T**13N* | | 13 | | | | | | | |
| KQT0402T**15N* | | 15 | | 3680 | 0.120 | | 640 | | |
| KQT0402T**16N* | | 16 | | | | | | | |
| KQT0402T**18N* | | 18 | | 3600 | 0.180 | | 560 | | |
| KQT0402T**19N* | | 19 | | | | | | | |
| KQT0402T**20N* | | 20 | | 3280 | 0.172 | | 500 | | |
| KQT0402T**22N* | | 22 | | | | | | | |
| KQT0402T**23N* | | 23 | | 3100 | 0.200 | | 480 | | |
| KQT0402T**24N* | | 24 | | | | | | | |
| KQT0402T**27N* | | 27 | | 3040 | 0.202 | | 450 | | |
| KQT0402T**30N* | | 30 | | | | | | | |
| KQT0402T**33N* | | 33 | | 3000 | 0.250 | | 400 | | |
| KQT0402T**34N* | | 34 | | | | | | | |
| KQT0402T**36N* | | 36 | | 2800 | 0.323 | | 400 | | |
| KQT0402T**39N* | | 39 | | | | | | | |
| KQT0402T**40N* | | 40 | | 2720 | 0.214 | | 400 | | |
| KQT0402T**43N* | | 43 | | | | | | | |
| KQT0402T**47N* | 47 | 2700 | 0.322 | 400 | | | | | |
| KQT0402T**51N* | 51 | | | | | | | | |
| KQT0402T**56N* | 56 | 2480 | 0.298 | 400 | | | | | |
| KQT0402T**68N* | 68 | | | | | | | | |
| KQT0402T**82N* | 82 | 2400 | 0.354 | 340 | | | | | |
| KQT0402T**R10* | 100 | | | | | | | | |
| KQT0402T**R12* | 120 | 2400 | 0.393 | 320 | | | | | |
| | | | | | | | | | |
| | | 2320 | 0.560 | 300 | | | | | |
| | | | | | | | | | |
| | | 2300 | 0.550 | 300 | | | | | |
| | | | | | | | | | |
| | | 2240 | 0.620 | 320 | | | | | |
| | | | | | | | | | |
| | | 2200 | 0.810 | 300 | | | | | |
| | | | | | | | | | |
| | | 2100 | 0.830 | 150 | | | | | |
| | | | | | | | | | |
| | | 2800 | 1.170 | 200 | | | | | |
| | | | | | | | | | |
| | | 2000 | 1.120 | 140 | | | | | |
| | | | | | | | | | |
| | | 1800 | 1.810 | 130 | | | | | |
| | | | | | | | | | |
| | | 1600 | 2.090 | 120 | | | | | |
| | | | | | | | | | |
| | | 1500 | 2.320 | 120 | | | | | |
| | | | | | | | | | |

* Add tolerance character (B, C, G, H, J, K, M)

** Add packaging code

For complete environmental specifications, please refer to www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/16/11

applications and ratings (continued)

Inductors

| Part Designation | Marking | Nominal Inductance (nH) | L Measuring Frequency | Inductance Tolerance | Q Quality Factor Minimum | Q Measuring Frequency (MHz) | Self Resonant Frequency Minimum (MHz) | DC Resistance Maximum (Ω) | Allowable DC Current Maximum (mA) |
|------------------|---------|-------------------------|-----------------------|-------------------------------|--------------------------|-----------------------------|---------------------------------------|------------------------------------|-----------------------------------|
| KQ0603TTE1N6* | C | 1.6 | 250 | J: $\pm 5\%$ K: $\pm 10\%$ | 24 | 250 | 12500 | 0.03 | 700 |
| KQ0603TTE1N8* | 0 | 1.8 | | | 16 | | | 0.045 | |
| KQ0603TTE3N3* | X | 3.3 | | | 22 | | 6900 | 0.055 | |
| KQ0603TTE3N6* | E | 3.6 | | | | | | 0.063 | |
| KQ0603TTE3N9* | 1 | 3.9 | | | 20 | | 5900 | 0.08 | |
| KQ0603TTE4N3* | F | 4.3 | | | | | | 0.063 | |
| KQ0603TTE4N7* | G | 4.7 | | | 27 | | 5800 | 0.116 | |
| KQ0603TTE5N1* | Y | 5.1 | | | | | | 0.115 | |
| KQ0603TTE6N8* | 2 | 6.8 | | | 28 | | 4800 | 0.11 | |
| KQ0603TTE7N5* | H | 7.5 | | | | | | 0.106 | |
| KQ0603TTE8N2* | A | 8.2 | | 31 | 4600 | | 0.12 | | |
| KQ0603TTE8N7* | J | 8.7 | | | | | 0.109 | | |
| KQ0603TTE9N5* | B | 9.5 | | 33 | 4800 | | 0.125 | | |
| KQ0603TTE10N* | 3 | 10 | | | | | 0.13 | | |
| KQ0603TTE11N* | K | 11 | | 35 | 4000 | | 0.086 | | |
| KQ0603TTE12N* | 4 | 12 | | | | | 0.13 | | |
| KQ0603TTE15N* | 5 | 15 | | 34 | 3300 | | 0.17 | | |
| KQ0603TTE16N* | L | 16 | | | | | 0.104 | | |
| KQ0603TTE18N* | 6 | 18 | | 35 | 3100 | | 0.17 | | |
| KQ0603TTE22N* | 7 | 22 | | | | | 0.19 | | |
| KQ0603TTE23N* | S | 23 | 38 | 3000 | 0.15 | | | | |
| KQ0603TTE24N* | M | 24 | | | 0.135 | | | | |
| KQ0603TTE27N* | 8 | 27 | 40 | 2800 | 0.22 | | | | |
| KQ0603TTE30N* | N | 30 | | | 0.144 | | | | |
| KQ0603TTE33N* | 9 | 33 | 37 | 2250 | 0.22 | | | | |
| KQ0603TTE36N* | P | 36 | | | 0.25 | | | | |
| KQ0603TTE39N* | 0 | 39 | 40 | 2080 | 2000 | 0.28 | | | |
| KQ0603TTE43N* | Q | 43 | | | | 0.30 | | | |
| KQ0603TTE47N* | 1 | 47 | 39 | 2200 | 1900 | 0.31 | | | |
| KQ0603TTE51N* | T | 51 | | | | 0.34 | | | |
| KQ0603TTE56N* | 2 | 56 | 37 | 1700 | 1400 | 0.49 | | | |
| KQ0603TTE68N* | 3 | 68 | | | | 0.54 | | | |
| KQ0603TTE72N* | 4 | 72 | 34 | 150 | 1350 | 0.58 | | | |
| KQ0603TTE82N* | 5 | 82 | | | | 0.61 | | | |
| KQ0603TTER10* | 6 | 100 | 32 | 1300 | 1400 | 0.65 | | | |
| KQ0603TTER11* | 7 | 110 | | | | 1.4 | | | |
| KQ0603TTER12* | 8 | 120 | 25 | 1300 | 1200 | 2.2 | | | |
| KQ0603TTER15* | 9 | 150 | | | | 2.3 | | | |
| KQ0603TTER18* | 0 | 180 | 24 | 100 | 1000 | 2.5 | | | |
| KQ0603TTER20* | U | 200 | | | | 2.4 | | | |
| KQ0603TTER21* | V | 210 | 30 | 50 | 900 | 2.3 | | | |
| KQ0603TTER22* | 1 | 220 | | | | 3.17 | | | |
| KQ0603TTER25* | W | 250 | 30 | 700 | 840 | 3.0 | | | |
| KQ0603TTER27* | 2 | 270 | | | | 3.7 | | | |
| KQ0603TTER30* | X | 300 | 30 | 640 | 800 | 1.21 | | | |
| KQ0603TTER33* | 3 | 330 | | | | 1.26 | | | |
| KQ0603TTER39* | 4 | 390 | 50 | J: $\pm 5\%$ K: $\pm 10\%$ | 610 | 190 | | | |
| KQ0603TTER47* | 5 | 470 | | | | 170 | | | |
| KQ0603TTER51* | V | 510 | | | | | | | |

* Add tolerance character (B, C, G, H, J, K, M)

For complete environmental specifications, please refer to www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/31/10

applications and ratings (continued)

| Part Designation | Marking | Nominal Inductance (nH) | L Measuring Frequency | Inductance Tolerance | Q Quality Factor Minimum | Q Measuring Frequency (MHz) | Self Resonant Frequency Minimum (MHz) | DC Resistance Maximum (Ω) | Allowable DC Current Maximum (mA) |
|------------------|---------|-------------------------|-----------------------|--|--------------------------|-----------------------------|---------------------------------------|---|-----------------------------------|
| KQ0603TTER56* | 6 | 560 | 50 | J: $\pm 5\%$ K: $\pm 10\%$ | 30 | 50 | 560 | 2.09 | 130 |
| KQ0603TTER62* | W | 620 | | | | | 590 | 1.89 | 150 |
| KQ0603TTER68* | 7 | 680 | | | | | 540 | 1.97 | 140 |
| KQ0603TTER75* | X | 750 | | | | | 530 | 2.04 | 130 |
| KQ0603TTER82* | 8 | 820 | | | | | 490 | 3.09 | 110 |
| KQ0603TTER91* | Y | 910 | | | | | 480 | 2.95 | 120 |
| KQ0603TTE1R0* | 9 | 1000 | | | | | 440 | 5.13 | 90 |
| KQ0603TTE1R2* | 0 | 1200 | | | | | 400 | 5.45 | 80 |
| KQ0805TTE3N3* | 0 | 3.3 | | | | | 250 | G: $\pm 2\%$ J: $\pm 5\%$ K: $\pm 10\%$ | 50 |
| KQ0805TTE6N8* | 1 | 6.8 | 1000 | 5500 | 0.11 | | | | |
| KQ0805TTE8N2* | 2 | 8.2 | 4700 | 0.12 | | | | | |
| KQ0805TTE12N* | 3 | 12 | 4000 | 0.15 | | | | | |
| KQ0805TTE15N* | 4 | 15 | 3400 | 0.17 | | | | | |
| KQ0805TTE18N* | 5 | 18 | 3300 | 0.20 | | | | | |
| KQ0805TTE20N* | Y | 20 | 50 | 500 | 2600 | 0.22 | | | 500 |
| KQ0805TTE22N* | 6 | 22 | | | 2500 | 0.25 | | | |
| KQ0805TTE27N* | 7 | 27 | | | 2050 | 0.27 | | | |
| KQ0805TTE33N* | 8 | 33 | | | 2000 | 0.29 | | | |
| KQ0805TTE39N* | 9 | 39 | | | 1650 | 0.34 | | | |
| KQ0805TTE43N* | 4 | 43 | | | 60 | 1550 | 0.34 | | |
| KQ0805TTE47N* | 0 | 47 | | | | 1450 | 0.38 | | |
| KQ0805TTE56N* | 1 | 56 | | | | 1300 | 0.42 | | |
| KQ0805TTE68N* | 2 | 68 | 1200 | 0.46 | | | | | |
| KQ0805TTE82N* | 3 | 82 | 65 | 1100 | 0.51 | 400 | | | |
| KQ0805TTER10* | 4 | 100 | 50 | 250 | 920 | | 0.56 | | |
| KQ0805TTER12* | 5 | 120 | | | 870 | | 0.64 | | |
| KQ0805TTER15* | 6 | 150 | | | 850 | | 0.70 | | |
| KQ0805TTER16* | H | 160 | | | 48 | | 650 | 1.0 | 350 |
| KQ0805TTER17* | J | 170 | | | | | 600 | 1.4 | 310 |
| KQ0805TTER18* | 7 | 180 | | | | | 560 | 1.5 | 290 |
| KQ0805TTER19* | D | 190 | | | | | 375 | 1.76 | 250 |
| KQ0805TTER20* | E | 200 | | | | | 340 | 1.9 | 230 |
| KQ0805TTER21* | F | 210 | | | | | 188 | 2.2 | 190 |
| KQ0805TTER22* | 8 | 220 | | | 25 | 50 | 215 | 2.35 | 180 |
| KQ0805TTER23* | K | 230 | 50 | 50 | | | 4100 | 0.08 | 1000 |
| KQ0805TTER24* | L | 240 | 50 | 50 | 3300 | 0.09 | | | |
| KQ0805TTER25* | G | 250 | | | 3000 | 0.10 | | | |
| KQ0805TTER27* | 9 | 270 | | | 2500 | 0.11 | | | |
| KQ0805TTER33* | 0 | 330 | | | 55 | 350 | 2400 | 0.12 | |
| KQ0805TTER39* | 1 | 390 | | | | | 1600 | 0.13 | |
| KQ0805TTER47* | 2 | 470 | | | | | 25 | 50 | |
| KQ0805TTER56* | 3 | 560 | | | 25 | 50 | 340 | 1.9 | 230 |
| KQ0805TTER68* | 4 | 680 | 25 | 50 | 188 | 2.2 | 190 | | |
| KQ0805TTER82* | 5 | 820 | 25 | 50 | 215 | 2.35 | 180 | | |
| KQ1008TTE10N* | 10N | 10 | 50 | J: $\pm 5\%$ K: $\pm 10\%$ M: $\pm 20\%$ | 50 | 500 | 4100 | 0.08 | 1000 |
| KQ1008TTE12N* | 12N | 12 | | | | | 3300 | 0.09 | |
| KQ1008TTE15N* | 15N | 15 | | | | | 3000 | 0.10 | |
| KQ1008TTE18N* | 18N | 18 | | | 55 | 350 | 2500 | 0.11 | |
| KQ1008TTE22N* | 22N | 22 | | | | | 2400 | 0.12 | |
| KQ1008TTE27N* | 27N | 27 | | | | | 1600 | 0.13 | |

* Add tolerance character (C, G, H, J, K, M) For complete environmental specifications, please refer to www.koaspeer.com
Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

applications and ratings (continued)

Inductors

| Part Designation | Marking | Nominal Inductance (nH) | L Measuring Frequency | Inductance Tolerance | Q Quality Factor Minimum | Q Measuring Frequency (MHz) | Self Resonant Frequency Minimum (MHz) | DC Resistance Maximum (Ω) | Allowable DC Current Maximum (mA) | |
|------------------|---------|-------------------------|-----------------------|------------------------------|--------------------------|-----------------------------|---------------------------------------|---------------------------|-----------------------------------|-----|
| KQ1008TTE33N* | 33N | 33 | 50 | J: ±5% K: ±10% M: ±20% | 60 | 350 | 1600 | 0.14 | 1000 | |
| KQ1008TTE39N* | 39N | 39 | | | | | 1500 | 0.15 | | |
| KQ1008TTE47N* | 47N | 47 | | | | | 1300 | 0.18 | | |
| KQ1008TTE56N* | 56N | 56 | | | 65 | | 1000 | 0.20 | | |
| KQ1008TTE68N* | 68N | 68 | | | | | 950 | 0.22 | | |
| KQ1008TTE82N* | 82N | 82 | | | | | 850 | 0.56 | | |
| KQ1008TTER10* | R10 | 100 | 25 | G: ±2% J: ±5% K: ±10% | 60 | 100 | 0.63 | 650 | | |
| KQ1008TTER12* | R12 | 120 | | | | | 750 | 0.70 | | |
| KQ1008TTER15* | R15 | 150 | | | | | 700 | 0.77 | | |
| KQ1008TTER18* | R18 | 180 | | | | | 600 | 0.84 | | |
| KQ1008TTER22* | R22 | 220 | | | | | 570 | 0.91 | | |
| KQ1008TTER27* | R27 | 270 | | | 45 | | 50 | 500 | 1.05 | 450 |
| KQ1008TTER33* | R33 | 330 | | | | | | 450 | 1.12 | |
| KQ1008TTER39* | R39 | 390 | | | | | | 415 | 1.19 | |
| KQ1008TTER47* | R47 | 470 | | | | | | 375 | 1.33 | |
| KQ1008TTER56* | R56 | 560 | | | | | | 360 | 1.40 | |
| KQ1008TTER62* | R62 | 620 | | | | | | 350 | 1.47 | |
| KQ1008TTER68* | R68 | 680 | | | | | | 320 | 1.54 | |
| KQ1008TTER75* | R75 | 750 | | | | | | 290 | 1.61 | |
| KQ1008TTER82* | R82 | 820 | | | | | | 250 | 1.68 | |
| KQ1008TTER91* | R91 | 910 | | | | | | 200 | 1.75 | |
| KQ1008TTE1R0* | 1R0 | 1000 | | | 35 | | 50 | 160 | 1.7 | 310 |
| KQ1008TTE1R2* | 1R2 | 1200 | | | | | | 220 | 1.9 | |
| KQ1008TTE1R5* | 1R5 | 1500 | | | | | | 140 | 2.2 | |
| KQ1008TTE1R8* | 1R8 | 1800 | | | | | | 110 | 2.3 | |
| KQ1008TTE2R2* | 2R2 | 2200 | | | | | | 100 | 2.7 | |
| KQ1008TTE2R7* | 2R7 | 2700 | | | 22 | | 25 | 90 | 2.8 | 250 |
| KQ1008TTE3R3* | 3R3 | 3300 | | | | | | 80 | 3.1 | |
| KQ1008TTE3R9* | 3R9 | 3900 | | | | | | 70 | 3.1 | |
| KQ1008TTE4R7* | 4R7 | 4700 | | | 20 | | 25 | 65 | 2.5 | 230 |
| KQ1008TTE5R6* | 5R6 | 5600 | | | | | | 60 | 2.8 | |
| KQ1008TTE6R8* | 6R8 | 6800 | 80 | 3.1 | | | | | | |
| KQ1008TTE8R2* | 8R2 | 8200 | 15 | 7.9 | 70 | 2.5 | 210 | | | |
| KQ1008TTE100* | 100 | 10000 | | | 60 | 2.8 | | | | |

* Add tolerance character (C, G, H, J, K, M)

environmental applications

Performance Characteristics

| Parameter | Requirements Maximum Δ L/L | | Test Method |
|------------------------------|---|------------------------------|---|
| | Limit | Typical | |
| Resistance to Soldering Heat | No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10% | Δ L/L: ±2.7% Δ Q/Q: ±6.6% | 260°C ± 5°C, 10s ± 1s |
| Rapid Change of Temperature | No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10% | Δ L/L: ±2.1% Δ Q/Q: ±5.3% | -40°C (30min.) / +125°C (30min.) 100 cycles |
| Low Temperature Exposure | No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10% | Δ L/L: ±1.8% Δ Q/Q: ±2.8% | -40°C ± 2°C, 1000h |
| High Temperature Exposure | No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10% | Δ L/L: ±1.8% Δ Q/Q: ±5.3% | 125°C ± 2°C, 1000h |
| Moisture Exposure | No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10% | Δ L/L: ±0.9% Δ Q/Q: ±6.9% | 40°C ± 2°C, 90%~95%RH, 1000h |
| Resistance to Solvent | No damage and marking shall remain legible | | — |
| | | | Accordance with MIL-STD 202F Method 215 |

For complete environmental specifications, please refer to www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/31/10