


### features

- Transponder coil is arranged with electrode in the long side of the part, and covered with molding resin
- Excellent high Q and high sensitivity, because neither the electrode nor the land pattern disturb the coil flux
- Strong resistance to vibration, shock and substrate bend test by 4 electrode terminals structure and the molded resin
- Small inductance change to environmental temperature change
- Marking: Black body color
- Products meet EU RoHS requirements

### dimensions and construction

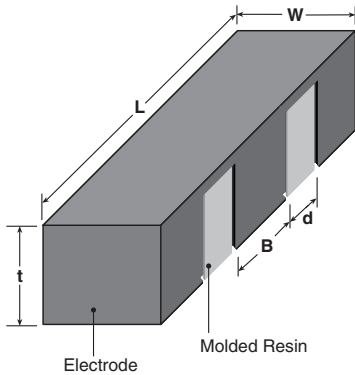

Type	Dimensions inches (mm)				
	B	d	L	W	t
KT	.134 Typ. (3.4 Typ.)	.059 Typ. (1.5 Typ.)	.465±.008 (11.8±0.2)	.142±.008 (3.6±0.2)	.118 Max. (3.0 Max.)

### ordering information

KT	11835	T	TEG	722	J
Product Code	Style	Terminal Surface Material	Packaging	Nominal Inductance	Tolerance
	L x W x H (mm) 11.8 x 3.6 x 3.0	T: Sn	TEG: plastic embossed	3 digits: 722: 7.2mH 123: 12mH	G: ±2% H: ±3% J: ±5%

### ratings

Type	Nominal Inductance (mH)	Inductance Tolerance	Unload Quality Factor Min.	L, Q Measuring Frequency (kHz)	Self Resonant Frequency (kHz) Min.	DC Resistance (Ω)Max.	Allowable DC Current (mA) Max.	Sensitivity (mV/μT)
KT11835TTEG722 □	7.2	G: ±2% H: ±3% J: ±5%	40	125	750	92	15	55
KT11835TTEG123 □	12		45		500	119	12	75

The code for inductance tolerance (G, H, J) enters □  
Any other inductance under 12mH is available  
Operating Temperature Range: -40°C - +125°C

