T-Series

Single Pole Rocker & Paddle Switches

The predecessor to the Curvette series whose versatility has allowed it to stand the test of time. Traditional styling coupled with self cleaning contacts, integrated wire leads, a multitude of circuits, ratings, and actuator choices has made the TA/LTA-Series appeal to a wide range of markets, including Appliance, HVAC, Food service, Transportation.





Dielectric Strength

UL/CSA:

1000V - live to dead metal parts

Electrical Life


100,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)



1 BASE PART NUMBER: SERIES/CIRCUITRY/RATING⁴/TERMINATION 10A 250 VAC, 15A 125 VAC, 3/4 HP 125-250 VAC Solder Lugs .250 Tabs Wire Leads Standard Base ON-NONE-OFF TA200 TA201 TA205 ON-NONE-ON TB200 TB205 TB201 ON-OFF-ON TC200 TC201 5A 250 VAC, 10A 125 VAC, 1/2 HP 125-250 VAC (ON)-NONE-OFF TA10A TA10B TC205 TA10F ON-NONE-(OFF) ON-NONE-(ON) T-SERIES W/ PL TA10L TA10T TB10F TB10A LUNGER ACTUATOR^{1,2} **TB10B** 10A 250 VAC, 16A 125 VAC, 1/2 HP 125-250 VAC TA25B-PLB-B TA25F-PLB-B OFF-NONE-(ON) ON-NONE-(OFF TA25T-PLB-B

T SERIES W/ MOMENTARY ROCKER ACTUATOR 10A 250 VAC, 15A 125 VAC, 20A 125-250 VAC "H", 3/4 HP 125-250 VAC TA22B-TLB-B ON-NONE-(OFF) TA22M-TLB-B


2 ACTUATOR STYLE Rocker PS Short Paddle 3 ACTUATOR COLOR5 Black w White 4 BEZEL COLOR⁵ White Black w

Notes

Imprinting is available. Consult factory.

- Optional plunger support option is available for applications requiring extensive lateral travel, consult factory for details.

 Maintained circuit not available with TA22 and TA25 Series.
- . 187 tab terminals also available. Consult factory for catalog number callout. Additional ratings are available. Consult factory. Additional colors are available. Consult factory.
- Indicates momentary function.

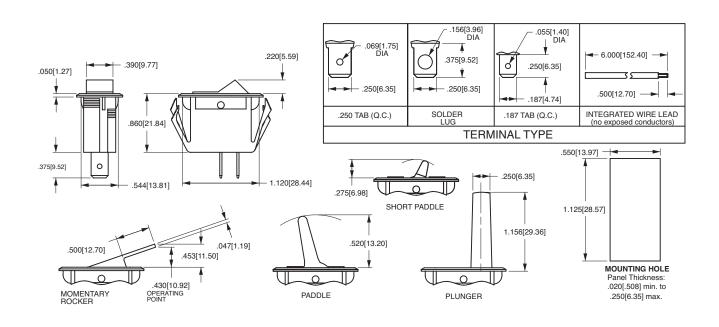

*Manufacturer reserves the right to change product specification without prior notice

REV_SW_T_0912