


TTG-Series Rocker Switches



The TTG-Series Mini Tippet snap-in rocker switches consist of two single pole illuminated or non-illuminated switches in a common base. Each pole can have the same or different switch function. These switches are AC rated up to 20 amps and are also suitable for low-voltage DC applications, in a wide range of markets including Appliance, HVAC, Food service and Transportation.

Dielectric Strength

UL/CSA:

1000V - live to dead metal parts

Electrical Life

50,000 cycles- maintained



25,000 cycles- momentary

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 150°F (0°C to +65.6°C)

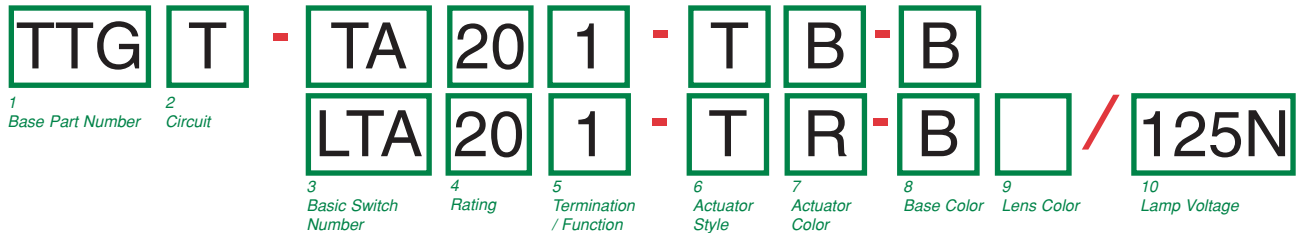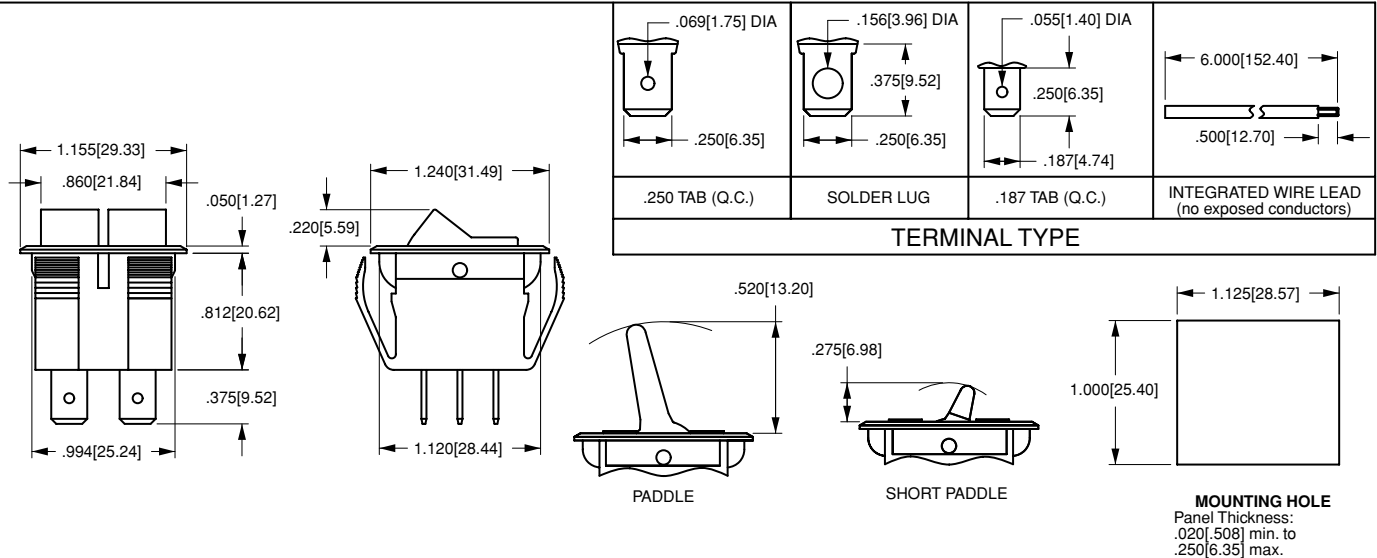

1 BASE PART NUMBER: SERIES'

TTGTwo Single Pole switches in one base

2 CIRCUIT

See Circuit Designation Chart Page 17.

3 BASIC SWITCH NUMBER

TAON-NONE-OFF

TCON-OFF-ON

TBON-NONE-ON

LTAON-NONE-OFF, lighted

4 RATING

105A 250VAC, 10A 125VAC, 1/2HP 125-250VAC

115A 250VAC, 10A 125VAC, 5A 125VAC L

2010A 250VAC, 15A 125VAC, 3/4HP 125-250VAC

2110A 250VAC, 15A 125VAC

2210A 250VAC, 15A 125VAC, 20A 125-250VAC H, 3/4HP 125-250VAC

5 TERMINATION/FUNCTION

solder lug

0

A

L

0

ON-NONE-(ON)

ON-OFF-ON

1

B

M

1

B

1

.250 tab QC

1

B

1

.187 tab QC

3

D

R

3

D

2

wire leads

5

F

T

5

F

F

6 ACTUATOR STYLE

Ppaddle

PSshort paddle

Trocker

7 ACTUATOR COLOR

unlighted²

Bblack

Wwhite

lighted³

Aamber

Cclear

Ggreen

LUblue

Rred

8 BASE COLOR²

Bblack

Wwhite

9 LENS COLOR³

Aamber

Cclear

Ggreen

LUblue

Rred

Wwhite

10 LAMP VOLTAGE

incandescent

6V6 volt

12V12 volt

18V18 volt

24V24 volt

28V28 volt

neon³

125N125 volt neon

250N250 volt neon

NOTES

Imprinting is available. Consult factory.

Panel Cut-Out Recommendations: For sheet metal panels, switch must enter panel in same direction as the punch. (Burr on bottom.) Test cut hole in actual material.

1 TTG available with circuits A,B,C,D,E,F,L,T,U.

2 Custom colors are available. Consult factory.

3 Specify lens color only if Basic Switch Number is LTA (lighted) with paddle actuator. If not, leave blank. Neon lamps (125V or 250V) not recommended with green or blue actuators and lenses.

4 Specify lamp voltage only if basic switch is LTA (lighted)

() Indicates momentary function.