



KBP151G - KBP157G

Single Phase 1.5AMPS. Glass Passivated Bridge Rectifiers


KBP

Features

- ✧ UL Recognized File #E-326243
- ✧ Glass passivated junction
- ✧ Ideal for printed circuit board
- ✧ Reliable low cost construction
- ✧ High surge current capability
- ✧ High temperature soldering guaranteed:
260°C/10 seconds at 5 lbs.,(2.3kg) tension
- ✧ Small size, simple installation
- ✧ Green compound with suffix "G" on packing
code & prefix "G" on datecode


Mechanical Data

- ✧ Case: Molded plastic body
- ✧ Terminals: Leads solderable per MIL-STD-202,
Method 208
- ✧ Weight: 1.5 grams

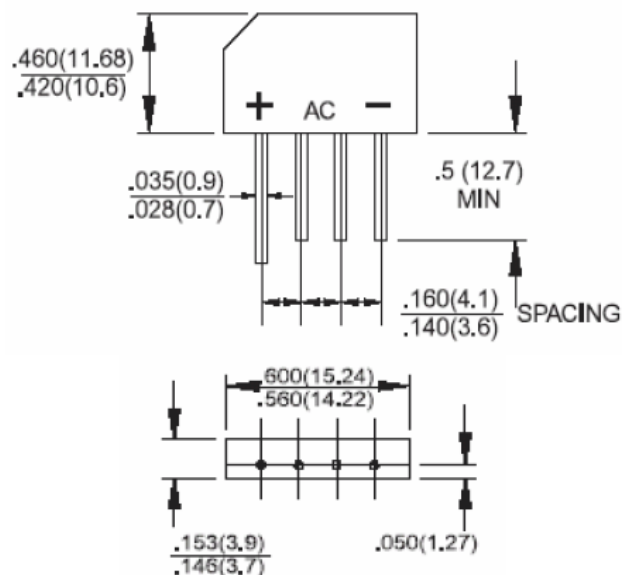

Dimensions in inches and (millimeters)

Marking Diagram



- KBP15XG = Specific Device Code
 G = Green Compound
 Y = Year
 WW = Work Week

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	KBP 151G	KBP 152G	KBP 153G	KBP 154G	KBP 155G	KBP 156G	KBP 157G	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @ $T_A=50^{\circ}C$	$I_{F(AV)}$	1.5							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	50							A
Maximum Instantaneous Forward Voltage (Note 1) @ 1.5A	V_F	1.1							V
Maximum DC Reverse Current @ $T_A=25^{\circ}C$ at Rated DC Blocking Voltage @ $T_A=125^{\circ}C$	I_R	10 500							uA uA
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$ $R_{\theta JL}$	40 13							$^{\circ}C/W$
Operating Temperature Range	T_J	- 55 to + 150							$^{\circ}C$
Storage Temperature Range	T_{STG}	- 55 to + 150							$^{\circ}C$

Note 1 : Pulse Test with PW=300u sec, 1% Duty Cycle

Note 2 : Mounted on P.C.B. with 0.4" x 0.4"(10 x 10mm) Copper Pads.

RATINGS AND CHARACTERISTIC CURVES (KBP151G THRU KBP157G)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

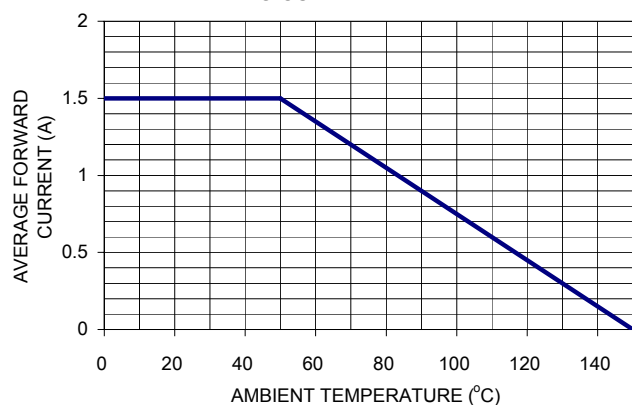


FIG. 2- TYPICAL REVERSE CHARACTERISTICS

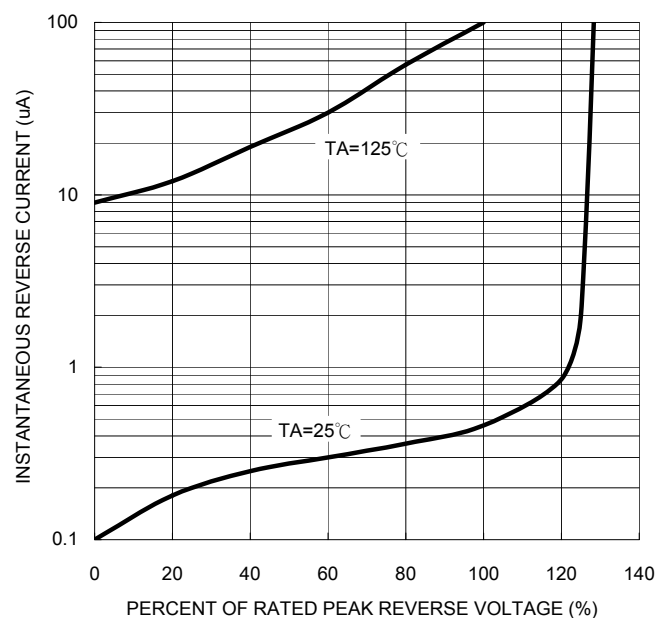


FIG. 3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER BRIDGE ELEMENT

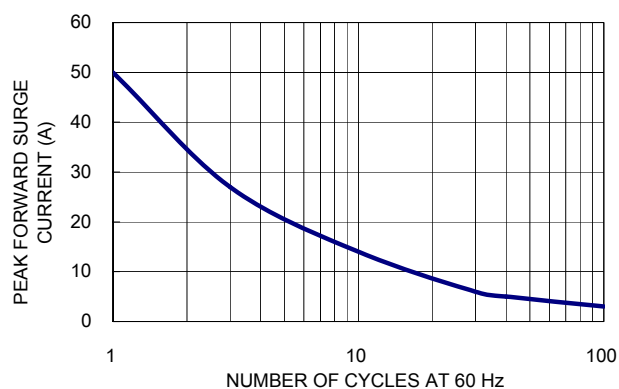


FIG. 4- TYPICAL JUNCTION CAPACITANCE

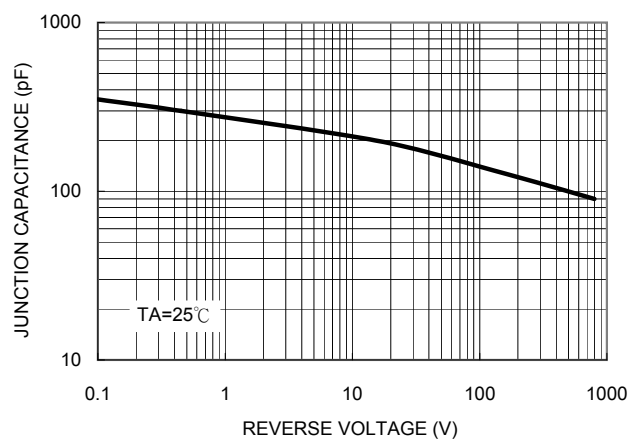


FIG. 5- TYPICAL FORWARD CHARACTERISRICS PER BRIDGE ELEMENT

