



REV		ECO	DESCRIPTION	OWN	APPROVED	DATE
M	13543		MODIFY NOTE 3 SHEET 1 & NOTE 4 SHEET 2 SEE ECO	R L	<i>RL</i>	8/23/25


TABLE 1		TABLE 2				
DASH NO	DESCRIPTION	DASH NO	"A" DIA	"B" DIA	"C" DIM	"D" DIM
-1	TERM (NO CHAIN)	-02	.630	.750	1.066	.450
-2	TERM WITH 2.5 BRASS CHAIN	-03	.505	.625	.941	.388
-3	TERM WITH 2.5 NYLON CHAIN	-04	.439	.562	.878	.355
-4	TERM WITH 3.0 BRASS CHAIN	-05	.380	.500	.816	.325
-5	TERM WITH 3.0 NYLON CHAIN	-06	.317	.437	.753	.295
-6	TERM WITH 6.0 BRASS CHAIN	-07	.281	.406	.722	.278
-7	TERM WITH 6.0 NYLON CHAIN	-08	.610	.750	1.066	.450
-8	TERM WITH 4.0 BRASS CHAIN	-09	.567	.687	1.003	.419
-9	TERM WITH 4.0 NYLON CHAIN	-008	.330	.450	.766	.300
-10	TERM WITH 10.0 BRASS CHAIN					
-11	TERM WITH 10.0 NYLON CHAIN					
-12	TERM WITH 2.5 SST ROPE					
-13	TERM WITH 3.0 SST ROPE					
-14	TERM WITH 6.0 SST ROPE					
-15	TERM WITH 4.0 SST ROPE					
-16	TERM WITH 7.5 SST ROPE					
-17	TERM WITH 4.5 SST ROPE					

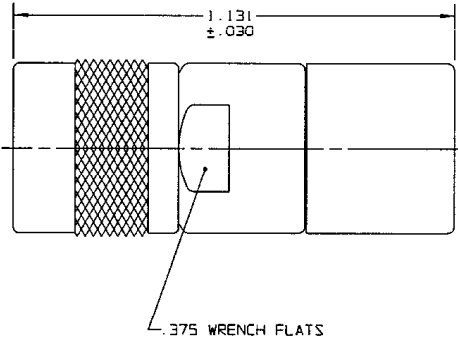


-1- SHOWN
NO CHAIN STAINLESS STEEL ROPE OR MOUNTING LUG

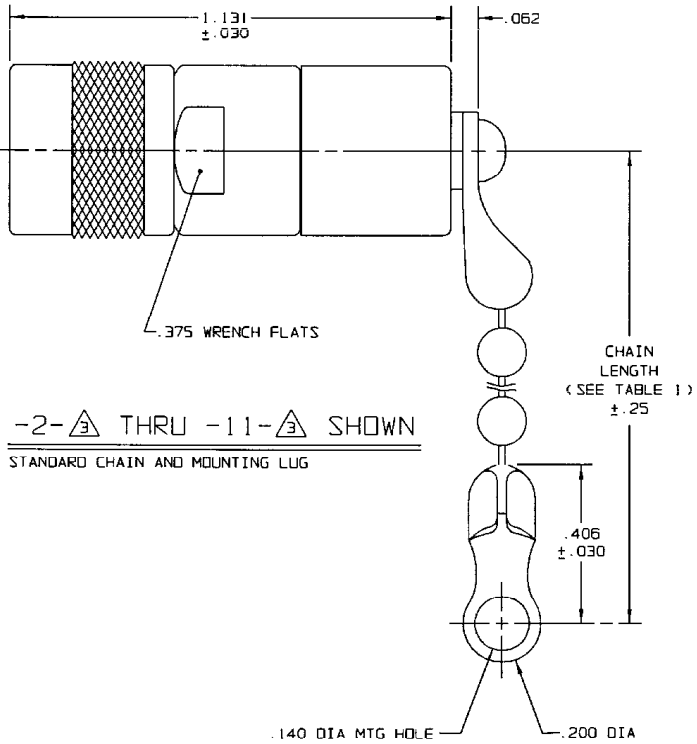


-2- THRU -11- SHOWN
STANDARD CHAIN AND MOUNTING LUG

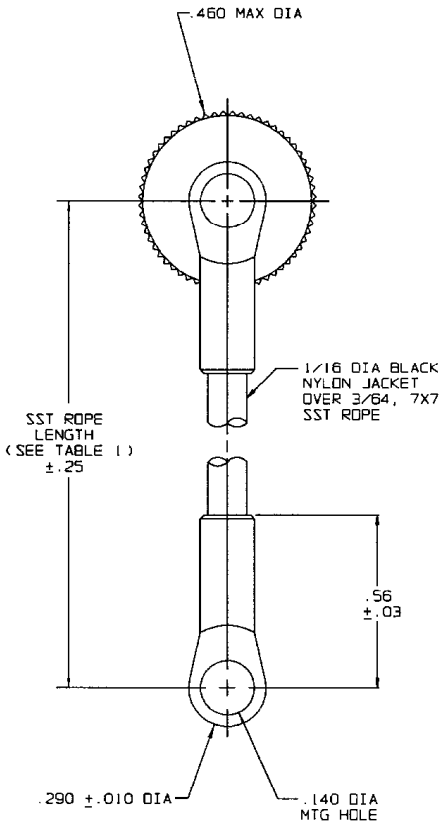

-12- THRU
-17- SHOWN
STAINLESS STEEL ROPE AND MOUNTING LUG

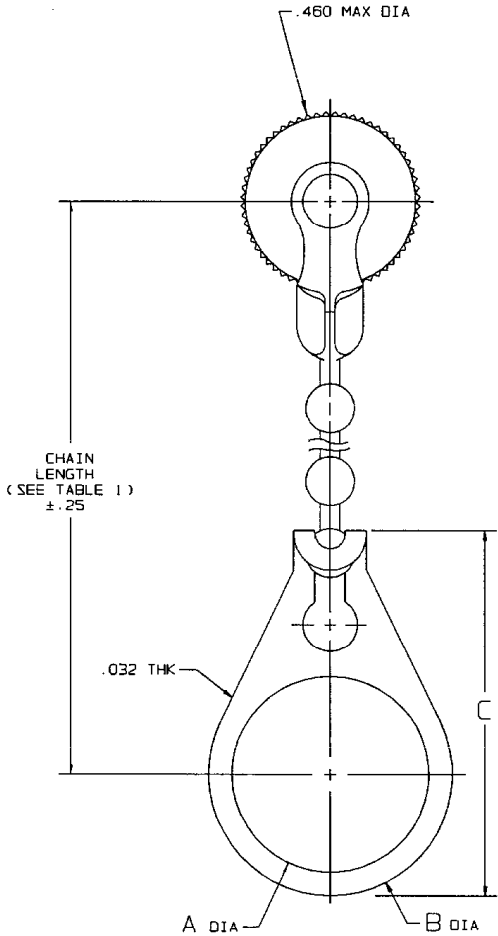

-2- -02 THRU
-11- -008 SHOWN
STANDARD CHAIN AND BULKHEAD JACK MOUNTING LUG

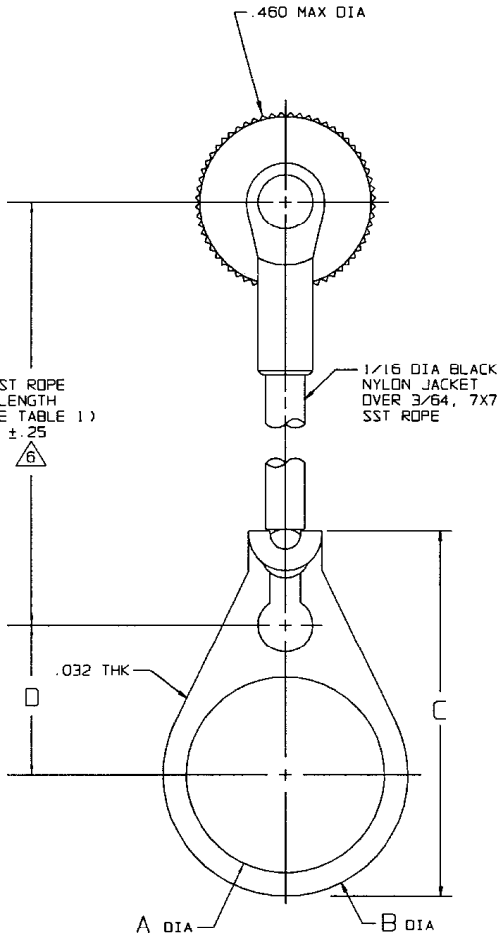

-12- -02 THRU
-17- -008 SHOWN
STAINLESS STEEL ROPE AND BULKHEAD JACK MOUNTING LUG

NOTE THAT LENGTH FOR SST ROPE WITH MOUNTING LUG OPTION IS NOT MEASURED TO CENTER OF BULKHEAD MOUNTING LUG

5. EXAMPLE OF COMPLETE MODEL NO:




4. PIN CONTACT TRS SERIES CONCENTRIC TWIAX/ TRIAX 3 LUG SUBMINIATURE TERMINATED CABLE PLUG

RESISTANCE VALUE IN OHMS (1/8, 1/2)
S* = CONTACT SHORTED TO INNER SHIELD (NO RESISTOR) 4
O* = LOOSELY ASSEMBLED (NO RESISTOR)

2. FINISH: NICKEL

1. ALL DIM ARE IN INCHES

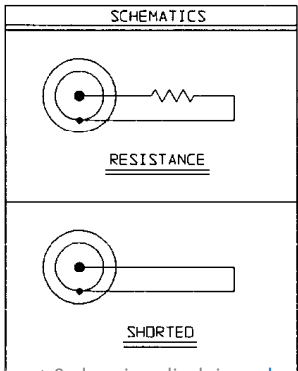

QTY	DESCRIPTION		PART NUMBER	ITEM
TOL UNLESS SPECIFIED	TROMPETER ELECTRONICS, INC.		TNGM1	
OWN R L	8/24/00	CODE IDENT	DRAWING NO.	REV
CHK <i>RL</i>	8/21/03	14949	3-0029	M
ENGR <i>RL</i>	8/21/03	DATE 7/15/2025	SHEET 1 OF 1	