

WRM Series

Features:

- AEC-Q200 qualified
- High reliability
- Defined pulse handling capability
- Tolerances down to 0.1%
- TCR down to 5ppm/°C
- Ag-free terminations for intrinsic anti-sulphur status




All parts are Pb-free and comply with EU Directive 2011/65/EU amended by (EU) 2015/863

Electrical Data

		WRM0102	WRM0204	WRM0207
Power rating @70°C	W	0.2	0.25	0.4
Resistance range	ohms	1R0 – 1M0	R22 – 5M1	R22 – 4M7
Limiting element voltage	V	200		250
TCR	ppm/°C	15, 25, 50, 100	5, 10, 15, 25, 50, 100	15, 25, 50, 100
Resistance tolerance	%	0.1, 0.25, 0.5, 1, 5		
Standard values		E24 & E96		
Thermal impedance	°C/W	250	200	140
Ambient temperature range	°C	-55 to +155	-55 to +125	
Insulation resistance	ohms	>10 ¹⁰		
Zero-ohm jumper current rating	A	2		4
Zero-ohm jumper maximum residual resistance	mΩ	15		

Physical Data

Dimensions in mm and weight in g							
Type	L max	D max	D ₁ max	K min	L ₁ min	Wt. nom.	
WRM0102	2.3	1.35	1.3	0.3	1.1	0.01	
WRM0204	3.7	1.55	1.55	0.5	1.5	0.02	
WRM0207	6.1	2.4	2.4	0.5	2.9	0.08	

Construction

A metal film is deposited onto a high dissipation ceramic former to which tin-plated terminating caps are fitted. The resistor is adjusted to value by a helical cut in the film and the body is protected by a lacquer coating.

Marking

Resistance values are colour coded with four bands, three indicating value and one indicating the multiplier. (Note this describes standard marking, but certain values may be supplied with the addition of a tolerance band following the multiplier.)

Terminations

Material Plated steel cap

Solderability The pure tin finish produces ageing free contacts on which low melting solders can be used. Dipped area shall be covered with a smooth and bright solder coating after 3 seconds immersion at 215°C.

Solvent Resistance

The body protection and marking are resistant to all normal industrial cleaning solvents suitable for printed circuit boards.

TCR and Tolerance Ranges

Type	TCR ($\pm$ ppm/ $^{\circ}$ C)	Tolerance ($\pm$ %)								
		5	1	0.5	0.25	0.1				
WRM0102	100	1R0-1M0		8R2 – 1M0						
	50									
	25	49R9 – 390K		49R9 – 200K		100R – 82K				
	15									
100R – 56K										
WRM0204	100	R22 – R91								
	50			1R0 – 5M1		10R – 1M6		22R – 332K		43R – 332K
	25			4R7 – 500K		10R – 500K		22R – 402K		
	15			10R – 221K		22R – 221K		43R – 221K		
	10 ¹					22R – 221K		43R – 221K		
	5 ¹	100R – 100K								
WRM0207	100	R22 – R91								
	50			1R0 – 4M7		10R – 1M6				
	25			10R – 1M0		10R – 680K		51R1 – 330K		100R – 100K
	15			51R1 – 10K				100R – 10K		


Notes: 1. The 5 & 10ppm/ $^{\circ}$ C TCRs are specified over the temperature range -10 to +85 $^{\circ}$ C.

Performance Data


Test		±ΔR/R% (+0.05Ω unless stated otherwise)			
		0204 & 0207			0102
		75R – 100K	10R - <75R or >100K – 332K	<10R or >332K	All values
Short time overload		0.05 (+0.01Ω)	0.1 (+0.01Ω)	0.25	
Bending test					
Resistance to soldering heat					
Temperature rapid change					
Endurance (load life)	1000 hrs	0.15		0.3	0.5
	8000 hrs	0.3		0.6	1
	225,000 hrs	0.9		1.8	3
Climatic sequence		0.25	0.5	1	
Damp heat steady state					
Current noise		<0.05μV/V	<0.25μV/V	<3μV/V	
Solderability		>95% coverage			
Voltage coefficient		0 to -0.5ppm/V			
Voltage proof		No flashover or breakdown			

Notes: 1. Resistors to be mounted on a PC-board according to IEC 115-1, clause 4.27.1.
2. AEC-Q200 approval applies to all values up to and including 3M4 at TCRs above 5ppm/ $^{\circ}$ C and to zero-ohm jumpers.

WRM0204/0207 Temperature Derating

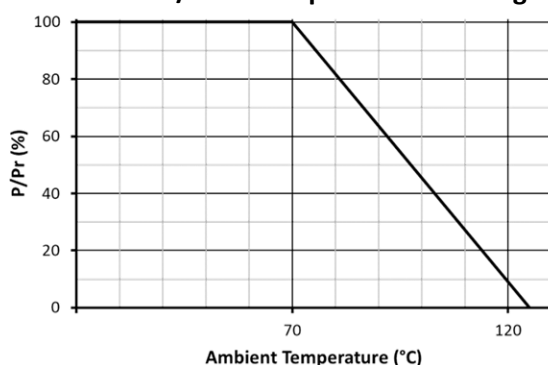

WRM0102 Temperature Derating

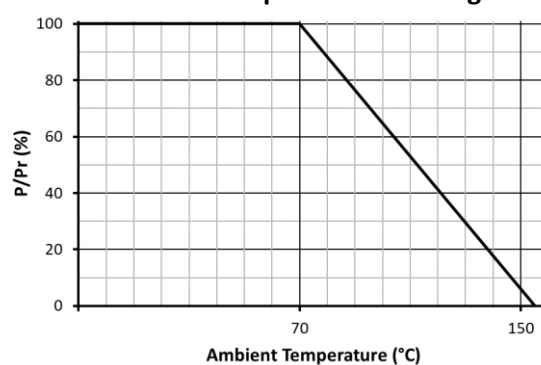


General Note


TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Pulse & Surge Performance


Single Pulse (mean power << rated power)

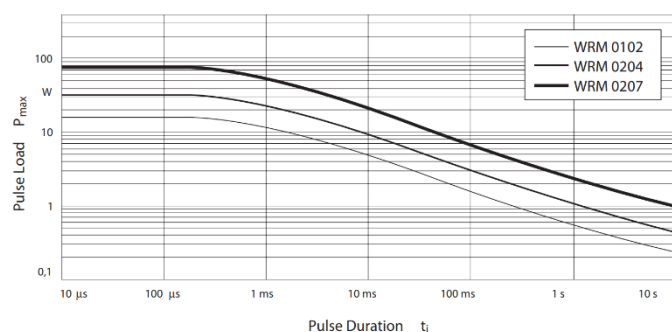


Continuous Pulses (mean power = rated power)

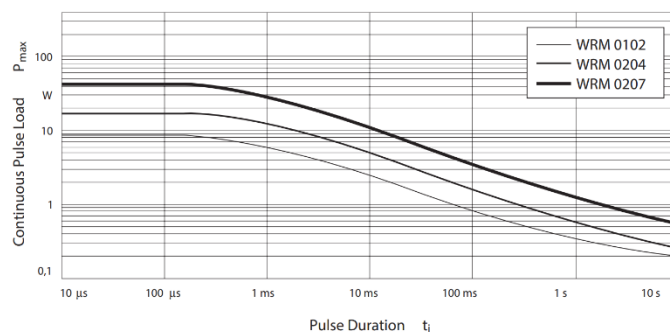

1.2/50μs Lightning Surge

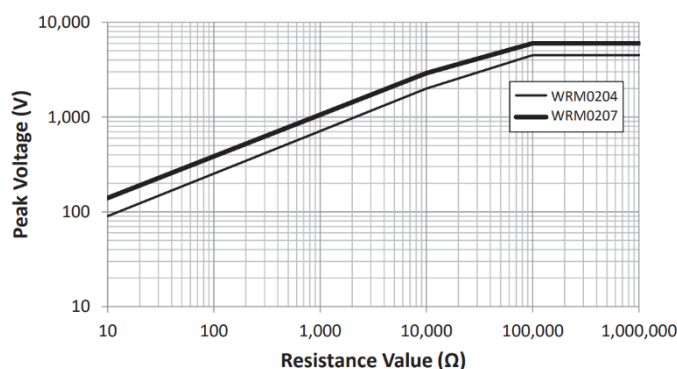

10/700μs Lightning Surge

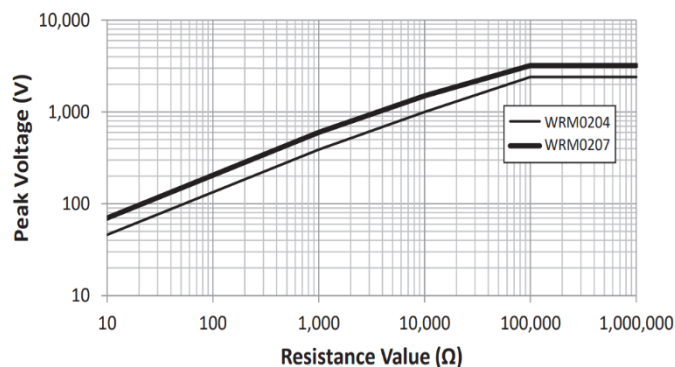

Packaging

WRM0102 and WRM0204 resistors are supplied in 8mm plastic tape on 7" reels. WRM0207 resistors are supplied in 12mm plastic tape on 7" reels. Packing complies with the requirements of IEC 60286-3.

Ordering Procedure

Examples: **WRM0204C-1K0FI** (0204, 50ppm/°C, 1 kilohm ±1%, Pb-free)

WRM0207-R000T2 (0207, zero-ohm jumper, Pb-free)

W	R	M	0	2	0	4	C	-	1	K	0	F	I	
1						2	3			4	5			

1 Type	2 TCR	3 Value	4 Tolerance	5 Packing	
WRM0102	V = ±5ppm/°C	E24/E96	B = ±0.1%	I	0102 3000 / 7" reel
WRM0204	T = ±10ppm/°C	3/4 characters	C = ±0.25%		0204 3000 / 7" reel ¹
WRM0207	Y = ±15ppm/°C	R = ohms	D = ±0.5%	T2 ²	0207 2000 / 7" reel
	D = ±25ppm/°C	K = kilohms	F = ±1%		
	C = ±50ppm/°C	M = megohms	J = ±5%		
	Z = ±100ppm/°C	R000 = Jumper	Omit for Jumper		
Omit for Jumper					

- Notes:
- 1 - High precision parts may be supplied on 1000-piece reels – please enquire.
 - 2 - Legacy part numbers used packing code "I" for WRM0207, which indicated 1500 / 7" reel.