


Agilent Technologies E1312A 6.5-Digit Multimeter

Data Sheet

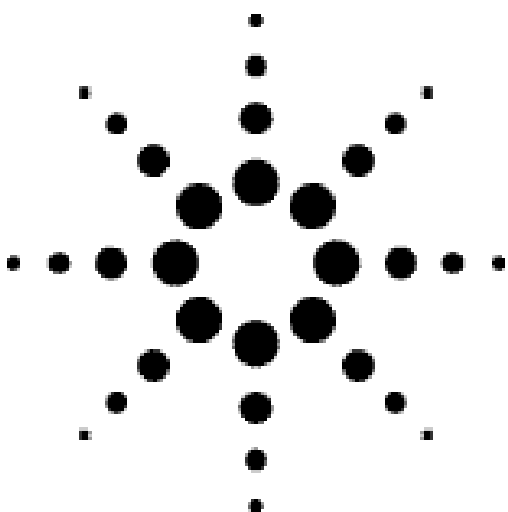

Product Specifications

VXI Characteristics

VXI device type: Message based

Data transfer bus: A16, slave

Size: B

Slots: 2

Connectors: P1/P2

Shared memory: n/a

VXI busses: n/a

C-size compatibility: Yes

Instrument Drivers See the Agilent Website (http://www.agilent.com/find/inst_drivers) for driver availability and downloading.

Command module firmware: n/a

Command module firmware rev: n/a

I-SCPI Windows® 3.1: n/a

I-SCPI Series 700: n/a

C-SCPI LynxOS: n/a

C-SCPI Series 700: n/a

HP Panel Drivers: No

VXIplug&play Windows Framework: Yes

VXIplug&play Windows 95/NT® Framework: No

VXIplug&play HP-UX Framework: No

Module Current

	I_{PM}	I_{DM}
+5 V:	0.2	0.1
+12 V:	0.7	0.06
-12V:	0	0
+24 V:	0	0
-24 V:	0	0
-5.2 V:	0	0

Cooling/Slot

Watts/slot: 9.40

ΔP mm H₂O: 0.05

Air Flow liter/s: 0.80