


# 3AG Equivalent – 6 x 30mm Miniature Glass




## Features

- Available in Fast Acting and Slow Blow Types
- RoHS Compliant

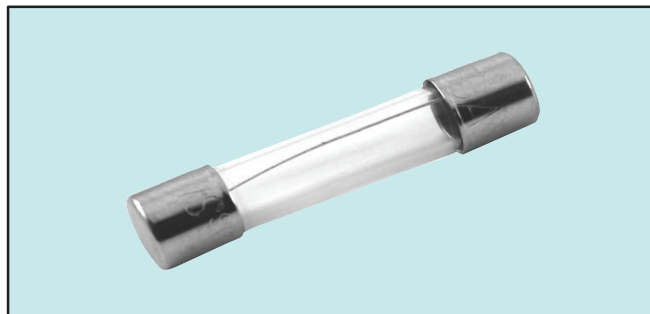

**F-04**

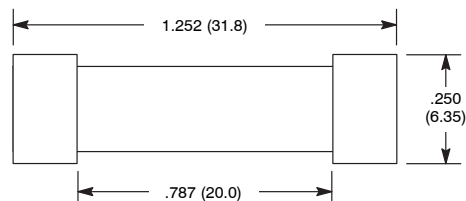

## Specifications

**Rated Voltage:** 125V / 250V

**Breaking Capacity:** 125VAC, 10kA; 250VAC, 200A

**Time Current Characteristics:**

### Fast Acting

| % of Ampere Rating | Opening Time     |
|--------------------|------------------|
| 110%               | 4 hours min.     |
| 135%               | 1 hour max.      |
| 200%               | 120 seconds max. |

### Slow Blow

| % of Ampere Rating | Opening Time    |                  |
|--------------------|-----------------|------------------|
|                    | 100mA to 3A     | 4A to 20A        |
| 110%               | 4 hours min.    | 4 hours min.     |
| 135%               | 1 hour max.     | 1 hour max.      |
| 200%               | 5 – 120 seconds | 12 – 120 seconds |

## Ordering Information:

| NTE Type No.   |              | Rated Current | Diag No. |
|----------------|--------------|---------------|----------|
| Fast Acting    | Slow Blow    |               |          |
| 74-6FG100MA ** | 74-6SG100MA  | 100mA         | F-04     |
| 74-6FG125MA ** | 74-6SG125MA  | 125mA         | F-04     |
| 74-6FG150MA ** | 74-6SG150MA  | 150mA         | F-04     |
| 74-6FG175MA ** | 74-6SG175MA  | 175mA         | F-04     |
| 74-6FG187MA ** | 74-6SG187MA  | 187mA         | F-04     |
| 74-6FG200MA ** | 74-6SG200MA  | 200mA         | F-04     |
| 74-6FG250MA ** | 74-6SG250MA  | 250mA         | F-04     |
| 74-6FG300MA ** | 74-6SG300MA  | 300mA         | F-04     |
| 74-6FG375MA ** | 74-6SG375MA  | 375mA         | F-04     |
|                | 74-6SG400MA  | 400mA         | F-04     |
| 74-6FG500MA    | 74-6SG500MA  | 500mA         | F-04     |
| 74-6FG600MA    | 74-6SG600MA  | 600mA         | F-04     |
| 74-6FG750MA    | 74-6SG750MA  | 750mA         | F-04     |
| 74-6FG1A       | 74-6SG1A     | 1.0A          | F-04     |
| 74-6FG1.25A    | 74-6SG1.25A  | 1.25A         | F-04     |
| 74-6FG1.5A     | 74-6SG1.5A   | 1.5A          | F-04     |
| 74-6FG1.6A     | 74-6SG1.6A   | 1.6A          | F-04     |
| 74-6FG2A       | 74-6SG2A     | 2.0A          | F-04     |
| 74-6FG2.5A     | 74-6SG2.5A   | 2.5A          | F-04     |
| 74-6FG3A       | 74-6SG3A     | 3.0A          | F-04     |
| 74-6FG4A       | 74-6SG4A     | 4.0A          | F-04     |
| 74-6FG5A       | 74-6SG5A     | 5.0A          | F-04     |
| 74-6FG6A       |              | 6.0A          | F-04     |
| 74-6FG7A       | 74-6SG7A     | 7.0A          | F-04     |
| 74-6FG8A       | 74-6SG8A     | 8.0A          | F-04     |
| 74-6FG10A      | 74-6SG10A    | 10A           | F-04     |
|                | 74-6SG12A ** | 12A           | F-04     |
|                | 74-6SG15A    | 15A           | F-04     |
|                | 74-6SG20A    | 20A           | F-04     |

\*\* Not UL Approved.