




SMA/DO-214AC

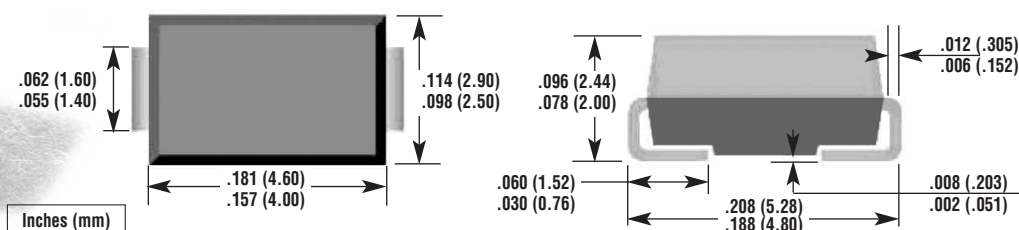

Part Number		Reverse	Breakdown Voltage		Test	Reverse Leakage		Max. Clamp	Peak Pulse	Package
		Stand-Off Voltage	$V_{BR@IT}$		Current	$I_{R@VRWM}$		Voltage	Current	
UNI	BI	V_{RWM} V	Min. V	Max. V	IT mA	UNI μA	BI μA	$V_C@I_{PP}$ V	I_{PP} A	
400W Transient Voltage Suppressor										
P4SMAJ5.0	P4SMAJ5.0C	5.0	6.40	7.55	10	800	1600	9.6	41.6	SMA/DO-214AC
P4SMAJ6.0	P4SMAJ6.0C	6.0	6.67	8.45	10	800	1600	11.4	35.1	SMA/DO-214AC
P4SMAJ6.5	P4SMAJ6.5C	6.5	7.22	9.14	10	500	1000	12.3	32.5	SMA/DO-214AC
P4SMAJ7.0	P4SMAJ7.0C	7.0	7.78	9.86	10	200	400	13.3	30.1	SMA/DO-214AC
P4SMAJ7.5	P4SMAJ7.5C	7.5	8.33	10.67	1.0	100	200	14.3	28.0	SMA/DO-214AC
P4SMAJ8.0	P4SMAJ8.0C	8.0	8.89	11.30	1.0	50	100	15.0	26.5	SMA/DO-214AC
P4SMAJ8.5	P4SMAJ8.5C	8.5	9.44	11.92	1.0	10	20	15.9	25.1	SMA/DO-214AC
P4SMAJ9.0	P4SMAJ9.0C	9.0	10.0	12.6	1.0	5	10	16.9	23.6	SMA/DO-214AC
P4SMAJ10	P4SMAJ10C	10	11.1	14.1	1.0	5	5	18.8	21.2	SMA/DO-214AC
P4SMAJ11	P4SMAJ11C	11	12.2	15.4	1.0	5	5	20.1	20.0	SMA/DO-214AC
P4SMAJ12	P4SMAJ12C	12	13.3	16.9	1.0	5	5	22.0	18.1	SMA/DO-214AC
P4SMAJ13	P4SMAJ13C	13	14.4	18.2	1.0	5	5	23.8	16.8	SMA/DO-214AC
P4SMAJ14	P4SMAJ14C	14	15.6	19.8	1.0	5	5	25.8	15.5	SMA/DO-214AC
P4SMAJ15	P4SMAJ15C	15	16.7	21.1	1.0	5	5	26.9	14.8	SMA/DO-214AC
P4SMAJ16	P4SMAJ16C	16	17.8	22.6	1.0	5	5	28.8	13.8	SMA/DO-214AC
P4SMAJ17	P4SMAJ17C	17	18.9	23.9	1.0	5	5	30.5	13.1	SMA/DO-214AC
P4SMAJ18	P4SMAJ18C	18	20.0	25.3	1.0	5	5	32.2	12.4	SMA/DO-214AC
P4SMAJ20	P4SMAJ20C	20	22.2	28.1	1.0	5	5	35.8	11.1	SMA/DO-214AC
P4SMAJ22	P4SMAJ22C	22	24.4	30.9	1.0	5	5	39.4	10.1	SMA/DO-214AC
P4SMAJ24	P4SMAJ24C	24	26.7	33.8	1.0	5	5	43.0	9.3	SMA/DO-214AC
P4SMAJ26	P4SMAJ26C	26	28.9	36.6	1.0	5	5	46.6	8.6	SMA/DO-214AC
P4SMAJ28	P4SMAJ28C	28	31.1	39.4	1.0	5	5	50.0	8.0	SMA/DO-214AC
P4SMAJ30	P4SMAJ30C	30	33.3	42.2	1.0	5	5	53.5	7.5	SMA/DO-214AC
P4SMAJ33	P4SMAJ33C	33	36.7	46.5	1.0	5	5	59.0	6.8	SMA/DO-214AC
P4SMAJ36	P4SMAJ36C	36	40.0	50.7	1.0	5	5	64.3	6.2	SMA/DO-214AC
P4SMAJ40	P4SMAJ40C	40	44.4	56.3	1.0	5	5	71.4	5.6	SMA/DO-214AC
P4SMAJ43	P4SMAJ43C	43	47.8	60.5	1.0	5	5	76.7	5.2	SMA/DO-214AC
P4SMAJ45	P4SMAJ45C	45	50.0	63.3	1.0	5	5	80.3	5.0	SMA/DO-214AC
P4SMAJ48	P4SMAJ48C	48	53.3	67.5	1.0	5	5	85.5	4.7	SMA/DO-214AC
P4SMAJ51	P4SMAJ51C	51	56.7	71.8	1.0	5	5	91.1	4.4	SMA/DO-214AC
P4SMAJ54	P4SMAJ54C	54	60.0	76.0	1.0	5	5	96.3	4.2	SMA/DO-214AC
P4SMAJ58	P4SMAJ58C	58	64.4	81.5	1.0	5	5	103	3.9	SMA/DO-214AC
P4SMAJ60	P4SMAJ60C	60	66.7	84.5	1.0	5	5	107	3.7	SMA/DO-214AC
P4SMAJ64	P4SMAJ64C	64	71.1	90.1	1.0	5	5	114	3.5	SMA/DO-214AC
P4SMAJ70	P4SMAJ70C	70	77.8	98.6	1.0	5	5	125	3.2	SMA/DO-214AC
P4SMAJ75	P4SMAJ75C	75	83.3	105.7	1.0	5	5	134	3.0	SMA/DO-214AC
P4SMAJ78	P4SMAJ78C	78	86.7	109.8	1.0	5	5	139	2.9	SMA/DO-214AC
P4SMAJ85	P4SMAJ85C	85	94.4	119.2	1.0	5	5	151	2.6	SMA/DO-214AC
P4SMAJ90	P4SMAJ90C	90	100	126.5	1.0	5	5	160	2.5	SMA/DO-214AC
P4SMAJ100	P4SMAJ100C	100	111	141.0	1.0	5	5	179	2.2	SMA/DO-214AC
P4SMAJ110	P4SMAJ110C	110	122	154.5	1.0	5	5	196	2.0	SMA/DO-214AC
P4SMAJ120	P4SMAJ120C	120	133	169.0	1.0	5	5	214	1.9	SMA/DO-214AC
P4SMAJ130	P4SMAJ130C	130	144	182.5	1.0	5	5	231	1.7	SMA/DO-214AC
P4SMAJ150	P4SMAJ150C	150	167	211.5	1.0	5	5	268	1.5	SMA/DO-214AC
P4SMAJ160	P4SMAJ160C	160	178	226.0	1.0	5	5	287	1.4	SMA/DO-214AC
P4SMAJ170	P4SMAJ170C	170	189	239.5	1.0	5	5	304	1.3	SMA/DO-214AC
P4SMAJ180	P4SMAJ180C	180	198	253.8	1.0	5	5	322	1.2	SMA/DO-214AC
P4SMAJ190	P4SMAJ190C	190	209	267.9	1.0	5	5	340	1.2	SMA/DO-214AC
P4SMAJ200	P4SMAJ200C	200	220	282.0	1.0	5	5	358	1.1	SMA/DO-214AC
P4SMAJ210	P4SMAJ210C	210	231	296.1	1.0	5	5	376	1.1	SMA/DO-214AC
P4SMAJ220	P4SMAJ220C	220	242	310.2	1.0	5	5	394	1.0	SMA/DO-214AC