
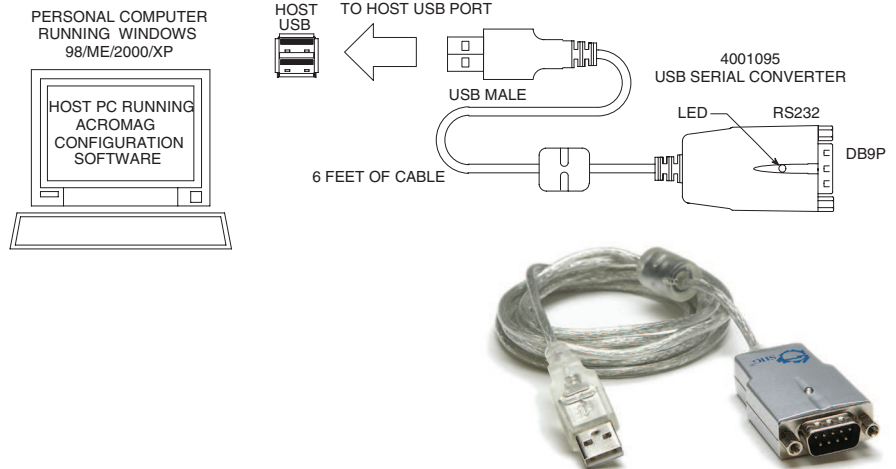


Model 4001-095 USB-to-Serial Adapter

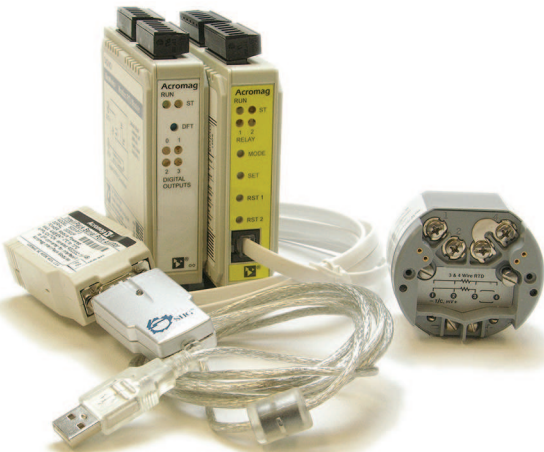

Simplifies configuration of Acromag I/O Modules ♦ Enables configuration via USB port

Description

This device is a USB-to-serial adapter that you can use to communicate with many Acromag I/O products for setup and re-configuration for your application.

Key Features & Benefits

- Connects to I/O modules via USB (other adapters may be necessary)
- Complete RS232 control signals
- Conforms to USB Specification, Version 1.1
- USB-powered
- Cable length, 6 ft., UL approved

Performance Specifications

USB Specification
Version 1.1

Data rate
Up to 115.2Kbps

Environmental Standards
RoHS-compliant

Basic Power Consumption
150mA

PC Requirements

Windows® 7 (32-/64-bit) / Vista (32-/64-bit) / XP (32-/64-bit) / Server 2003 & 2008 (32-/64-bit) / 2000 / ME / 98SE / 98

Ordering Information

NOTE: For more information visit www.acromag.com.

Adapters

4001-095

USB to serial adapter. Includes driver CD and manual.

5030-913

Serial port adapter. DB9S connector to RJ11 jack.

5034-202

RS-485 to 3-wire cable converter and cable, DB-9M to 3 x 12AWG RS-485 cable, 8 ft.

5032-787

RS-232 to 151T transmitter configuration device converter and cable, 6 ft.

5034-214


Non-isolated RS-232 to RS-485 Serial Port Converter, DB-9F to DB-9F.

Cables


5030-902

Cable. 6 feet long with RJ11 plug at each end.


IntelliPack 800x Series Adapter and Cable

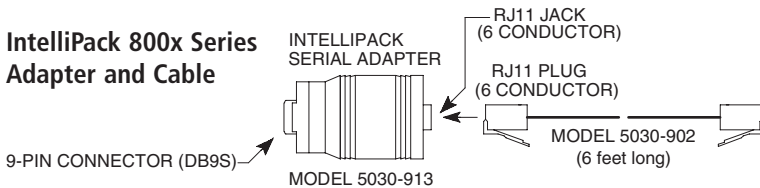

900MB Modbus Series Adapter and Cable

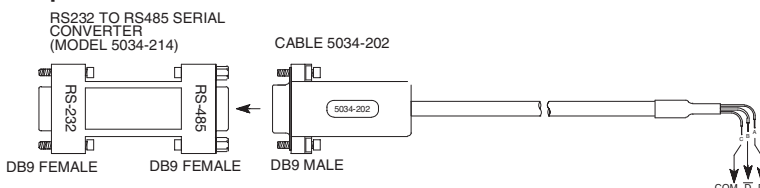

151T Transmitter Series Adapter and Cable

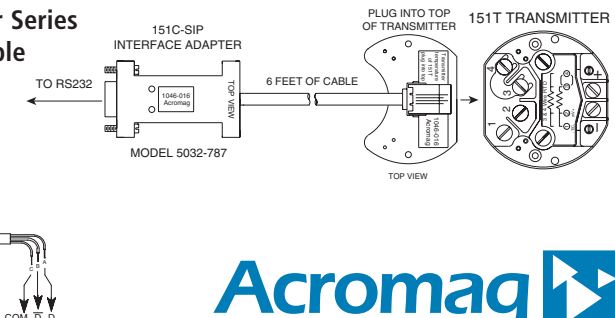

Acromag 
THE LEADER IN INDUSTRIAL I/O

Tel: 248-295-0880 ■ Fax: 248-624-9234 ■ sales@acromag.com ■ www.acromag.com ■ 30765 S Wixom Rd, Wixom, MI 48393 USA