


Input Controller 16

Input Controller 16

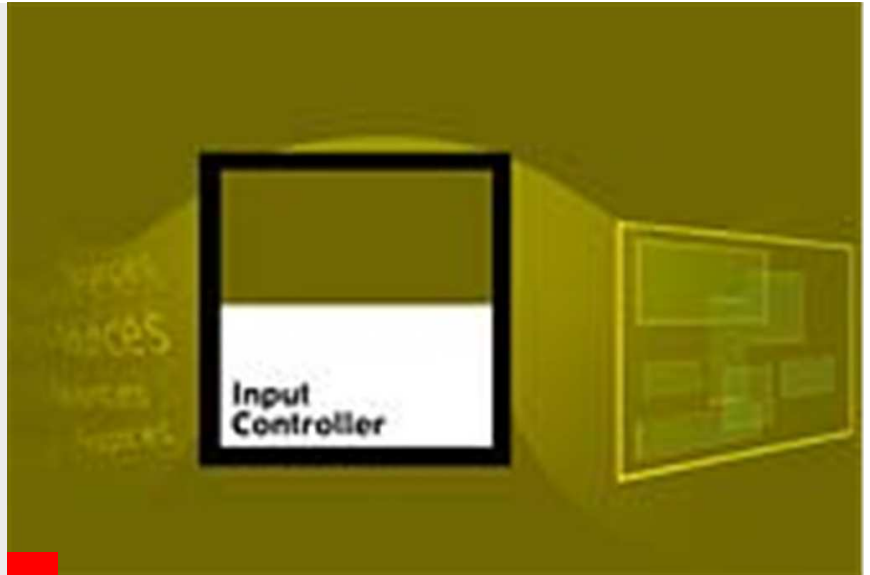

The Input Controller Series is a multi-input control device, allowing you to show a multitude of windowed inputs onto a single display. Able to control both projection and daylight displays, the Input Controller offers a wide range of effects such as alpha blending, chroma keying and z-order control.

Barco's Input Controller comes fully equipped with all necessary hardware and control software and is available in two versions with 8 and 16 inputs.

Product specifications

Input Controller 16

Input	16 user defined inputs Front accessible Integrated video processing Auto sensing, hot swappable S-video, composite, YUV, RGB SDI, HD-SDI, DVI up to UXGA
Compatibility	Barco Daylight Displays Projectors
Output	DVI-A, DVI-D, RGB
Control	<ul style="list-style-type: none">· Scaler 16 input channels [Data-Video] fully scalable to desired output resolution <ul style="list-style-type: none">· Z-order Instant modification of Z-order control, for each output window <ul style="list-style-type: none">· Window positioning Intuitive positioning interface <ul style="list-style-type: none">· Connectors RS 232 [RJ11]
Effects	Anamorphic imaging Chroma-keying [per input] Alpha-keying [per input] Z-order control Windowing/ View ports
Operating T°	0° <-> 45°
Power	240W-480W auto ranging 90-264V (50-60 Hz) Connector: 3 pin IEC
Order Information	R9851580