

40W Lighting Transformer




Indoor & Outdoor AC Magnetic Class 2 Lighting Transformer

Product Code: M40L12-AR

Magnitude's M40L12-AR is the most compact lighting transformer on the market with a magnetic transformer core. It is equipped with two auto-reset breakers, one on the input and one on the output, which protect both the load and transformer. The transformer is encased in a coated metal box that includes 2 knock-outs, one on each side, to enable easy installation that complies with electrical code requirements.

Features

- Dimmable with any standard MLV TRIAC dimmer
- Two auto-reset circuit breakers
- ETL listed
- Certified to CSA Standard
- Class 2
- Commercial and Residential Use
- Nema 3R enclosure
- Wiring compartment with 2 knock-outs for clean and easy installation.

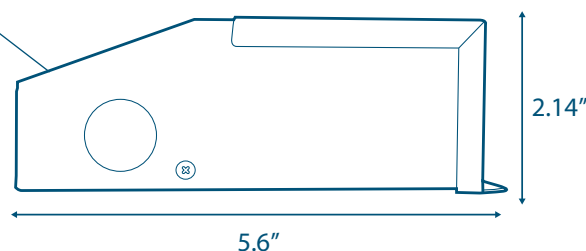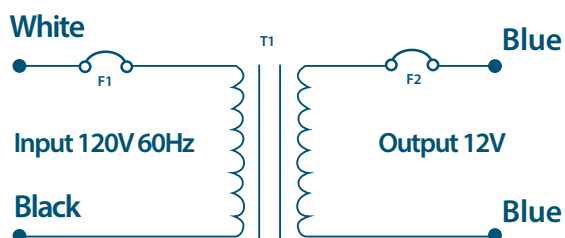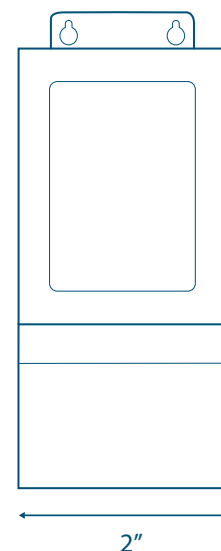

Specifications

| | |
|------------------------------|--|
| Max Load | 40W |
| Input Voltage | 120V AC |
| Input Current Full Load | 360 mA |
| Output Voltage Full Load | 11.4V AC |
| Max Output Current Full Load | 3.32A |
| Open Circuit Output Voltage | 12.5V AC |
| Efficiency on I | 90.3% |
| Coil Former | Double Section Bobbin |
| Thermal Class | B130°C |
| Leads Primary | PVC 600V #20 |
| Leads Secondary | PVC 300V #16 |
| Circuit Breaker | primary and secondary auto reset |
| Dimensions L*W*H | 5.6 in. x 2 in. x 2.14 in. (142.2mm x 50.8 mm x 54.3 mm) |
| Weight | 35 Oz. |

The specifications are subject to change without notice