

# 60W Lighting Transformer




Indoor & Outdoor AC Magnetic Class 2 Lighting Transformer

Product Code: M60L24-AR

Magnitude's M60L24-AR is the most compact lighting transformer on the market with a magnetic transformer core. It is equipped with two auto-reset breakers, one on the input and one on the output, which protect both the load and transformer. The transformer is encased in a coated metal box that includes 2 knock-outs, one on each side, to enable easy installation that complies with electrical code requirements.

## Features

- Dimmable with any standard MLV TRIAC dimmer
- Two auto-reset circuit breakers
- ETL listed
- Certified to CSA Standard
- Class 2
- Commercial and Residential Use
- Nema 3R enclosure
- Wiring compartment with 2 knock-outs for clean and easy installation.

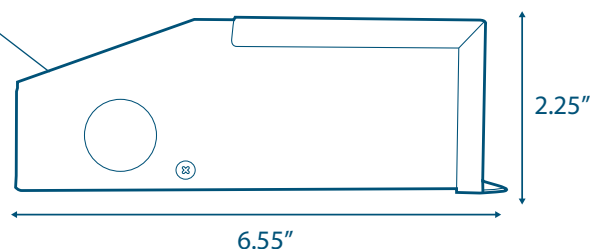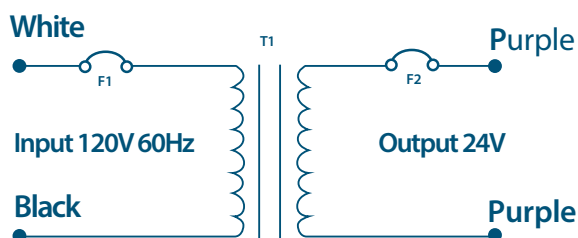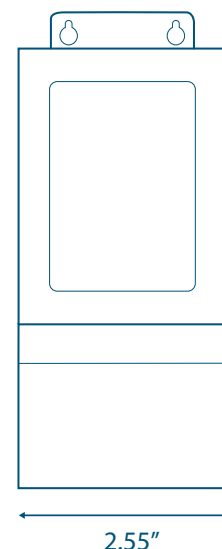

## Specifications

|                              |  |
|------------------------------|--|
| Max Load                     | 60W  |
| Input Voltage                | 120V AC  |
| Input Current Full Load      | 540 mA   |
| Output Voltage Full Load     | 23V AC   |
| Max Output Current Full Load | 2.17A  |
| Open Circuit Output Voltage  | 25V AC   |
| Efficiency on I              | 90.5%  |
| Coil Former                  | Double Section Bobbin  |
| Thermal Class                | B130°C   |
| Leads Primary                | PVC 600V #20   |
| Leads Secondary              | PVC 300V #16   |
| Circuit Breaker              | primary and secondary auto reset                               |
| Dimensions L*W*H             | 6.55 in. x 2.25 in. x 2.55 in. (166.3 mm x 57.15 mm x 64.7 mm) |
| Weight                       | 50 Oz.   |

The specifications are subject to change without notice