

100W Lighting Transformer


Indoor & Outdoor Magnetic Lighting Transformer

Product Code: M100L12-277



Magnitude's M100L12-277 LED Driver is the perfect choice for use in hospitals, schools, and shopping malls or for any commercial application that 277V is present. The Drivers are encased in a high-quality NEMA 3R enclosure that includes 2 knock-outs to enable easy installation. It is equipped with a push to reset breaker on the output for load protection.

Features

- Push-to-reset breaker
- ETL listed
- Certified to CSA Standard
- Commercial Use
- flicker-free
- Nema 3R enclosure
- Wiring compartment with 2 knock-outs for clean and easy installation.

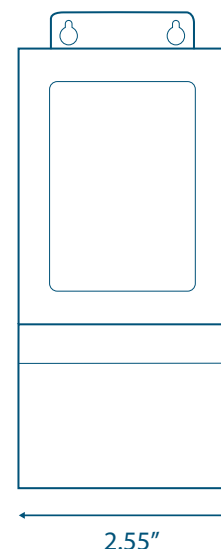

2.55"

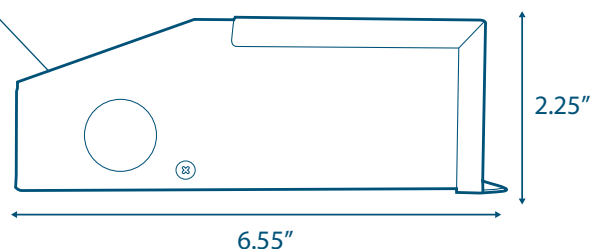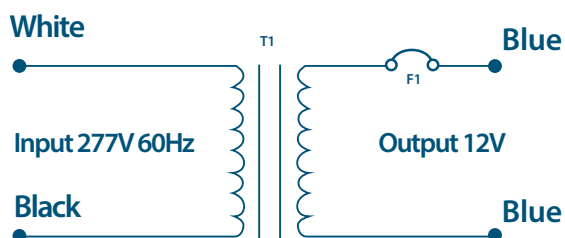

6.55"

2.25"

Specifications

Max Load	100W
Input Voltage	277V AC
Input Current Full Load	838 mA
Output Voltage Full Load	11.5V AC
Max Output Current Full Load	8.24A
Open Circuit Output Voltage	12.5V AC
Efficiency on I	92.3%
Coil Former	Double Section Bobbin
Thermal Class	B130°C
Leads Primary	PVC 600V #20
Leads Secondary	PVC 300V #16
Circuit Breaker	secondary manual push-to-reset
Dimensions L*W*H	6.55 in. x 2.25 in. x 2.55 in. (166.3 mm x 57.15 mm x 64.7 mm)
Weight	50 Oz.

The specifications are subject to change without notice