


# VIM-328

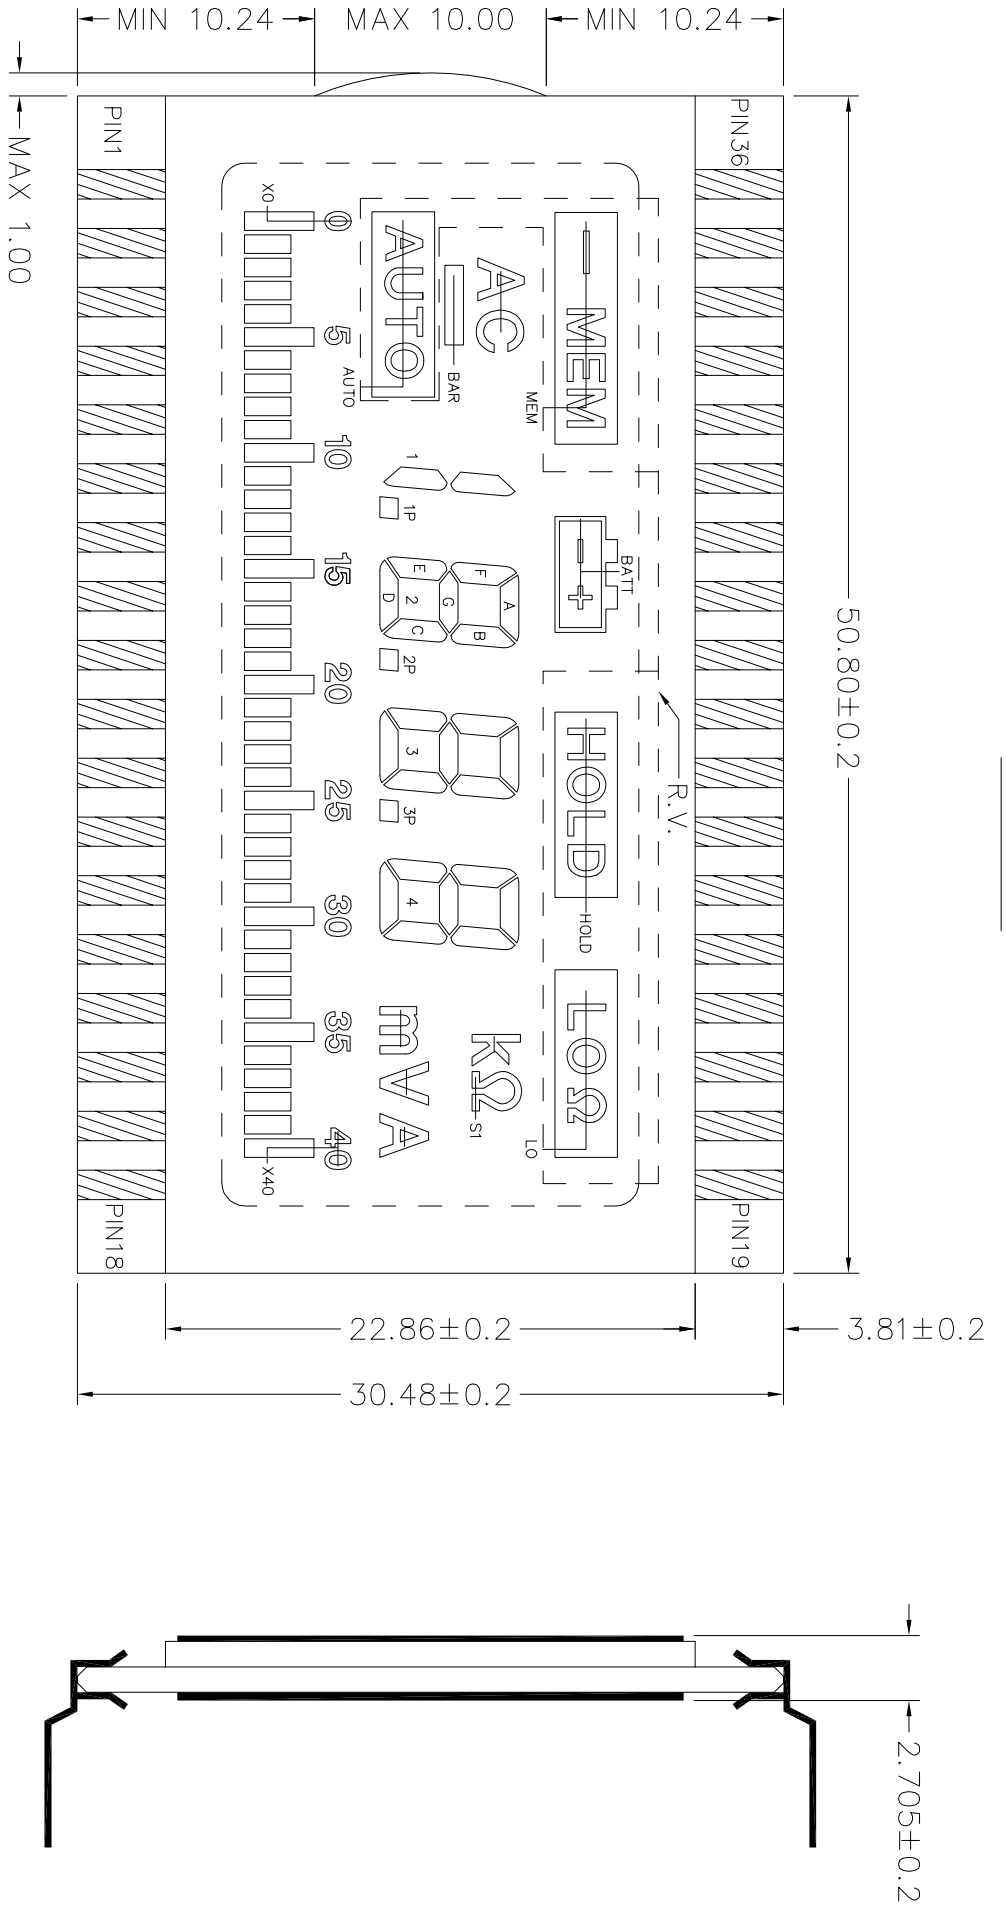

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	
COM1	NC	X0	X5	X6	X11	X12	X17	X18	X23	X24	X29	X30	X35	X36	---	COM1	---	---	---	---	COM1	---	---	HOLD	4B	4A	4F	3B	3A	3F	2B	2A	2F	1B	BATT	AC	
COM2	NC	X1	X4	X7	X10	X13	X16	X19	X22	X25	X28	X31	X34	X37	X40	---	COM2	---	---	---	COM2	---	---	SI	k	4C	4G	4E	3C	3G	3E	2C	2G	2E	1C	MEM	BAR
COM3	NC	X2	X3	X8	X9	X14	X15	X20	X21	X26	X27	X32	X33	X38	X39	---	---	---	---	---	---	A	V	m	---	4D	---	3P	3D	---	2P	2D	---	---	---	AUTO	

REMARKS : R.V. = REVERSE VIDEO

PCB LINKAGE - PIN16 & PIN21

PIN17 & PIN20  
PIN18 & PIN19

NC = NO CONNECTION

PIN VERSION