



HSS Shock Sensor Features and Benefits

Features

- Magnetically operated reed switch
- High power switching
- Standard diagnostic pin
- Fully sealed unit


Benefits

- Fit and forget reed switch reliability
- No standby power requirement
- Robust design suited to harsh environments
- No external reset required

Applications

- Vibration sensing (white goods)
- Rough handling detection (packaging)
- Heavy brake warning
- Automotive (airbag sensor)


DIMENSIONS (in) mm

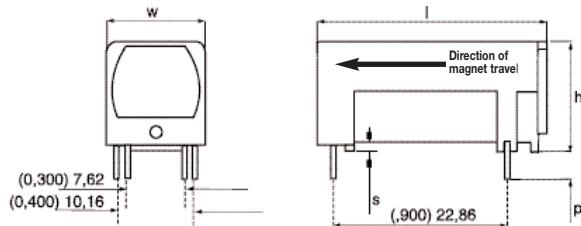

Reference	Description	Dimension
l	Length	(1.190) 30.23
w	Width	(.512) 13.00
h	Height	(.567) 14.41
pl	Pin Length	(.134) 3.40
s	Stand Off	(.050) 1.28



SENSITIVITY & SPECIFICATION

Type/Sensitivity			Response Times on 9G 15ms Pulse				Operating Characteristics					Nominal Response Curves	
Type	Static G (ref)	Static G Tol.	TTC	Dwell	Contact Resistance	Operating & Storage Temp	Switch Rating	Switching Voltage	Insulation Resistance	Response Curve Colour			
HSS-2G5-50W	2.5G	±0.6G	<15ms	>32.5ms	175 (mOhm)	-40°C to +85°C	50W	200 Vdc	>10MOhm@200V dc				

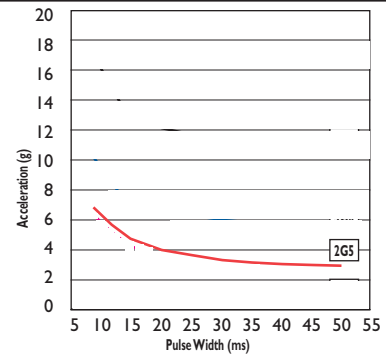

HSS PCB LAYOUT (Bottom View)

ORDERING INFORMATION

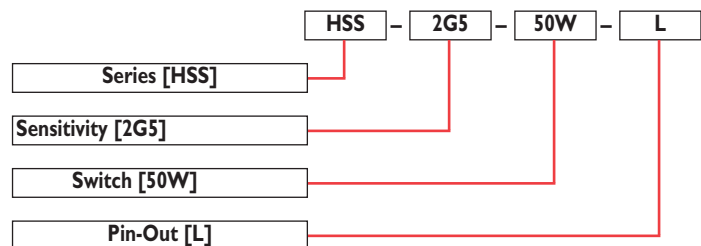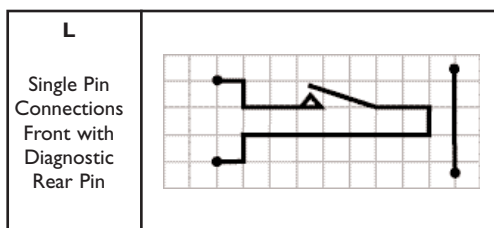

INFORMATION PROVIDED ON THIS DATA SHEET IS PROVIDED FOR INFORMATION PURPOSES ONLY AND SHOULD NOT BE RELIED UPON AS BEING ACCURATE FOR ANY PARTICULAR PURPOSE. Product performance may be affected by the application to which the product is put. Upon request, HAMLIN will assist purchasers by providing information specific to any particular application. HAMLIN disclaims any and all liability whatsoever for any purchaser's reliance upon the information contained on this data sheet without further consultation with authorised representatives of HAMLIN.

Hamlin USA Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales.us@hamlin.com
Hamlin UK Tel: +44 (0)1379 649700 • Fax: +44 (0)1379 649702 • Email: sales.uk@hamlin.com
Hamlin Germany Tel: +49 (0) 6142 923920 • Fax: +49 (0) 6142 923921 • Email: sales.de@hamlin.com
Hamectrol France Tel: +33 (0) 1 6047 3000 • Fax: +33 (0) 1 6015 9136 • Email: sales.fr@hamlin.com
Hamlin China Tel: +86 (0) 512 627 22 461 Fax: +86 (0) 512 627 22 471 Email: sales.cn@hamlin.com