

DEPT
1
2
3
4
5
6
7
8
9
10
11
12
NC
JZ
DW


PART NAME:

TERMINAL, 1/4" PIGGYBACK


PART NO:

3000H221J/-6RA



PART NUMBER	MATERIAL	FINISH
3000H221J-6RA	.016±.001 THK C.R.STEEL	PRE-NICKEL
3000H221JB-6RA		NONE

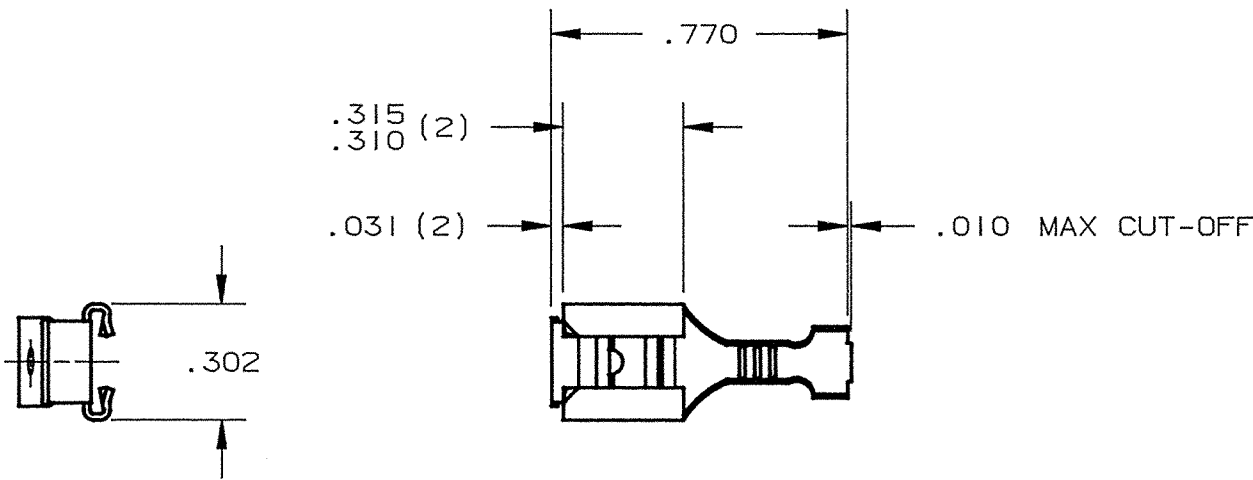


- NOTES:
1. TO MATE WITH .250 x .032 MALE TAB AND .250 x .032 FEMALE RECEPTACLE.
 2. TO ACCOMMODATE #18-#22 AWG.
 3. INSULATION DIAMETER RANGE: .060-.115 DIA.
 4. RECOMMENDED STRIP LENGTH: 9/32 ± 1/32.
 5. INSERTION/WITHDRAWAL FORCES TO BE AS FOLLOWS WHEN USING STEEL TEST TAB 3000M307.
1ST INSERTION: 13 LBS MAX.
6TH WITHDRAWAL: 5 LBS MIN.

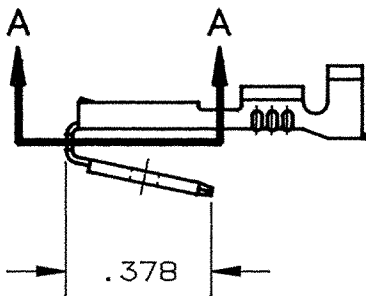

WIRE GRIP INSULATION GRIP




SECTION A-A

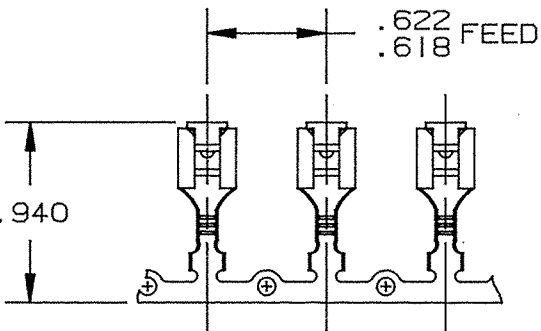

FABRICATED TERMINAL STRIP
SCALE 1:1

ARK-LES LETTERING
THIS SIDE

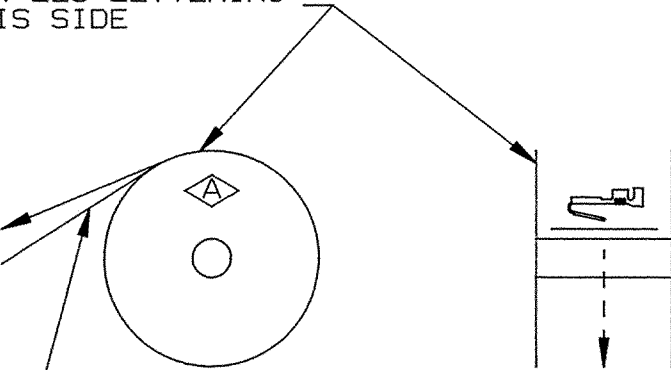

PAPER INTERLEAVING

WINDING DIAGRAM

ARK-LES
UNCONTROLLED

				PROD. REL.	RH6001S	11-14-94	R.T.	TOLERANCES UNLESS OTHERWISE SPECIFIED:		
				QUOTE REL.				DECIMALS ±.010	METRIC ±0.25mm	ANGLES ±1°
				DR:	B J CARUTHERS	11/3/94		MATERIAL: SEE TABLE		
				CHK'D:	R.W.T.	11-8-94		FINISH: SEE TABLE		
				APP:	COR 11-14-94			PART NO: 3000H221J/-6RA		
				SUPERCEDES DWG. DATED:						
REV.		DESCRIPTION	DATE	DR.	SCALE: 2:1	CAD NO: BT00087				
A		PROD. REL. PER ECR #10349	11/3/94	BJC						