

# 50W LED Driver




## Outdoor & Indoor Magnetic Class 2 LED Driver

Product Code: M50L24DC-277

Magnitude's M50L24DC-277 LED Driver is the perfect choice for use in hospitals, schools, and shopping malls or for any commercial application that 277V is present. The Drivers are encased in a high-quality NEMA 3R enclosure that includes 2 knock-outs to enable easy installation. It is equipped with a push to reset breaker on the output for load protection.

## Features

- Push-to-reset breaker
- ETL listed
- CSA listed
- Class 2
- Commercial Use
- flicker-free
- Nema 3R enclosure
- Wiring compartment with 2 knock-outs for clean and easy installation.

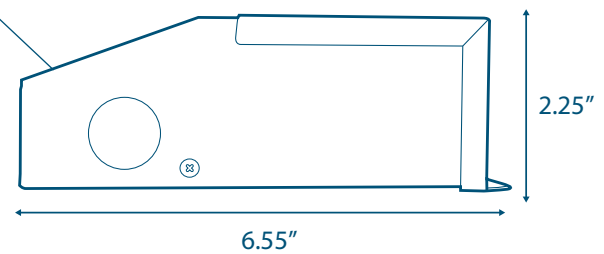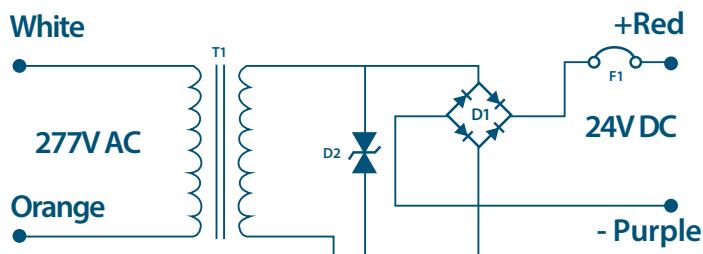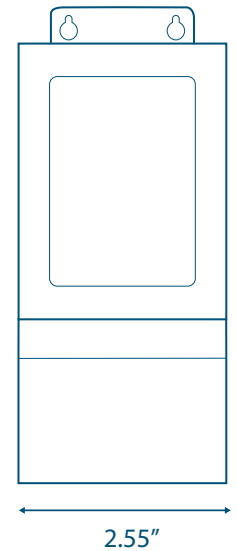

## Driver's Specifications

Max Load	50W
Input Voltage	277V AC
Input Current Full Load	0.79 A
Output Voltage Full Load	21.8V DC
Max Output Current Full Load	2.13 A
Open Circuit Output Voltage	23.6V DC
Efficiency on I	84%
Power Factor on I	0.82
Coil Former	Double Section Bobbin
Thermal Class	B130°C
Leads Primary	PVC 600V #20
Leads Secondary	PVC 300V #14
Circuit Breaker	secondary manual push-to-reset
Dimensions L*W*H	6.55 in. x 2.25 in. x 2.55 in. (166.3 mm x 57.15 mm x 64.7 mm)
Weight	50 Oz.

The specifications are subject to change without notice