



REV	ECN	APP'D
1		<i>3/9/10</i>

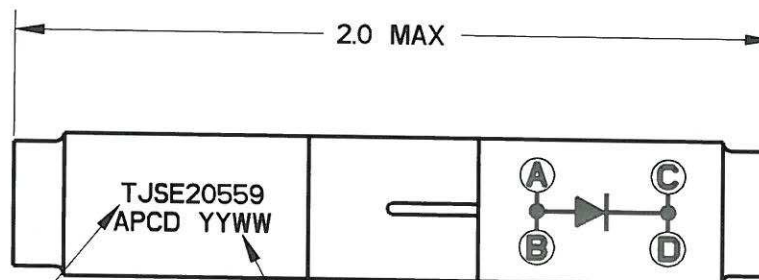

WHITE MARKING
.06 HT

DATE CODE



NOTES:

1. MATERIALS:

HOUSING: POLYETHERIMIDE, COLOR BLACK
GROMMET: SILICONE ELASTOMER, COLOR BLUE
INTERNAL CONTACT: COPPER ALLOY, GOLD PLATED,
PER MIL-DTL-45204, TYPE I, GRADE C, CLASS I
50 MICROINCH MIN. OVER NICKEL PER SAE-AMS-QQ-N-290,
CLASS 1, 50/30 MICROINCH MIN.
CONTACT RETAINER: STAINLESS STEEL

2. SPLICE ACCEPTS (4) MATING M39029/1-101 CONTACTS
(NOT INCLUDED)

3. PART COMPLIES TO ALL REQUIREMENTS PER SAE-AS-81714.

4. DIODE: JANTXIN5554, QTY: 1

DIMENSIONS		TOLERANCES	PROJECTION	Amphenol Pcd		4. DIODE: JANTXIN5554, QTY: 1			
ANSI Y14.5M UNITS: INCHES Pro/E FILE		.XX ±0.01 .XXX ±0.005 ANGLES ±2.0°		ENGR M. DiGIACOMO 3/9/2010		TITLE WIRE SPLICE, ELECTRONIC DIODE JANTXIN5554 SIZE 20			
ORIGINAL 	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD BEVERLY, MA, USA			CHKD		SIZE	DWG NO.		REV
				APPD 		A	TJSE20559		1
						CODE: 58982		SCALE: 2:1	SHEET 1 OF 1