


13	12	11	10	9	8	7	6	5	4	3	2	1377
PART NO.	ENG. NO.	SUFFIX WAS										
02-09-1134	1377-A(P909)L	-ATL										
02-09-5132	1377-A(P228)L	-GL										
50-34-8511	1377-A(P154)L											





LEGEND

1377-A(****)*

FORM L=LOOSE

P=PREPLATE
BLANK=POSTPLATE

FINISH CODE

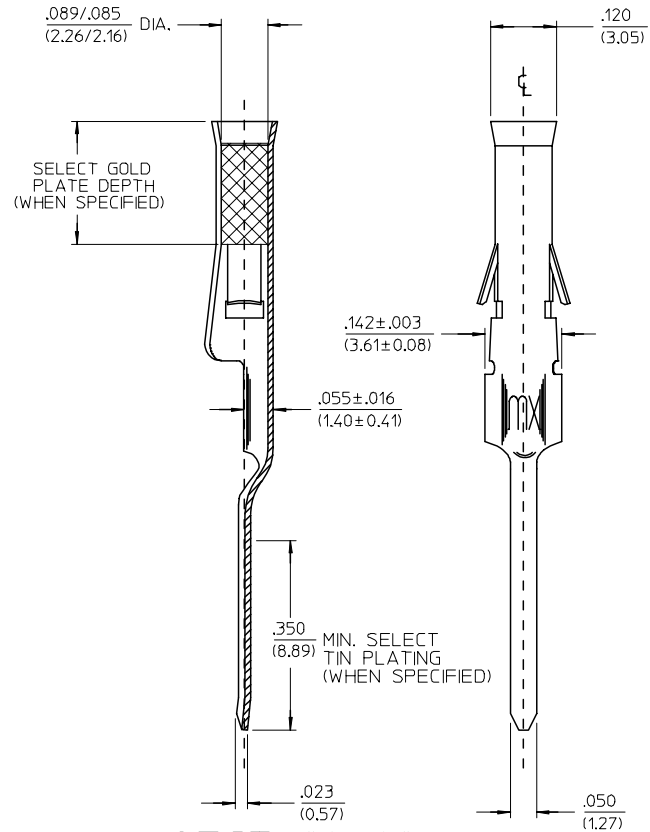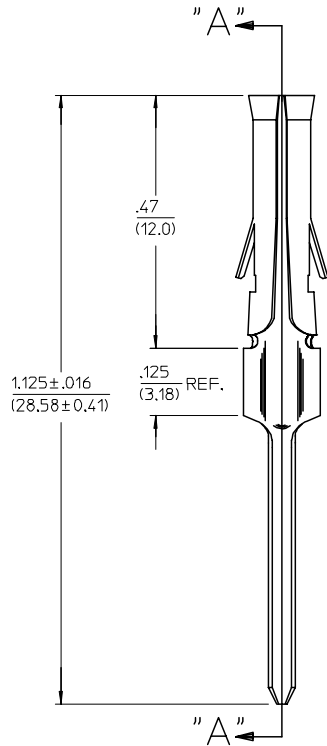

SECT. "A-A"

- NOTES:**
- MATERIAL: BRASS
 - FINISHES:
 - * 909 HOT TIN DIP .000100/(0.00254) MIN.
 - * 154 OVERALL TIN .000100/(0.00254) MIN. OVER .000050/(0.00127) MIN. NICKEL OVERALL.
 - * 228 SELECT GOLD PLATE .000030/(0.00075) MIN. IN CONTACT AREA, SELECT TIN PLATE .000100/(0.00250) MIN. IN TAIL AREA OVER .000050/(0.00125) NICKEL OVERALL.
 - * THE PRIMARY SHIPPING CARTON WILL BE LABELED, "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC", AND CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD.
 - PRODUCT SPECIFICATION: PS-02-09
 - PACKAGING INFORMATION: NOT AVAILABLE.
 - TERMINALS FOR USE WITH 0.093/(2.36) SERIES HOUSINGS.
 - RECOMMENDED P.C. BOARD HOLE SIZE IS .062 .002/(1.57 0.05) DIA.
 - INSERTION FORCE: 3.5 LBS. MAX. WHEN TERMINAL IS INSERTED INTO AN .093 SERIES HOUSING.

ADD P/N 1377 -AP154L EC NO: UCP2006-2524 DRWN: AELHAG 2006/05/15 CHKD: LSCHMDT 2006/05/22 APPR: FSMITH 2006/07/14 REV V1	DESCRIPTION	QUALITY SYMBOLS - 0 - 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 1:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	REVISE ON CAD ONLY	
			mm	INCH	DIMENSION STYLE			TITLE	
					IN/MM			P.C. TAIL TERMINAL FEMALE .093/(2.36) DIA	
			4 PLACES ± --- ± ---		DRAWN BY GC	DATE 1991/02/18		MOLEX MOLEX INCORPORATED	
			3 PLACES ± --- ± .010		CHECKED BY RW	DATE 1991/02/18			
2 PLACES ± 0.25 ± .014		APPROVED BY GWF		DATE 1991/02/18	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-1377-*	SHEET NO. 1 OF 1		
1 PLACE ± 0.35 ± ---		ANGULAR ±1/2°							
		DRAFT WHERE APPLICABLE							
		MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					