
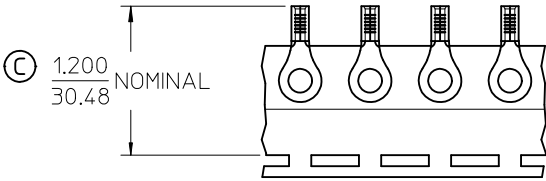


10	9	8	7	6	5	4	3	2	19203
LOOSE PIECE		TAPE MOUNTED		STUD SIZE	DIMENSIONS				
MATERIAL NO.	ENG. NO.	MATERIAL NO.	ENG. NO.		"S"±.007/0.18	"W" MAX	"C" MIN	"L"MAX	
192030486	A-S-122-14	192030005	A-S-122-14T	1/4"	.256/6.50	.467/11.86	.427/10.85	.894/22.71	
192030483	A-S-132-06	192030011	A-S-132-06T	06	.146/3.71	.270/6.86	.238/6.05	.611/15.52	
192030485	A-S-132-08	192030014	A-S-132-08T	08	.169/4.29	.270/6.86	.238/6.05	.611/15.52	
192030387	A-S-133-10	192030016	A-S-133-10T	10	.209/5.31	.325/8.26	.270/6.86	.666/16.92	

Ⓒ

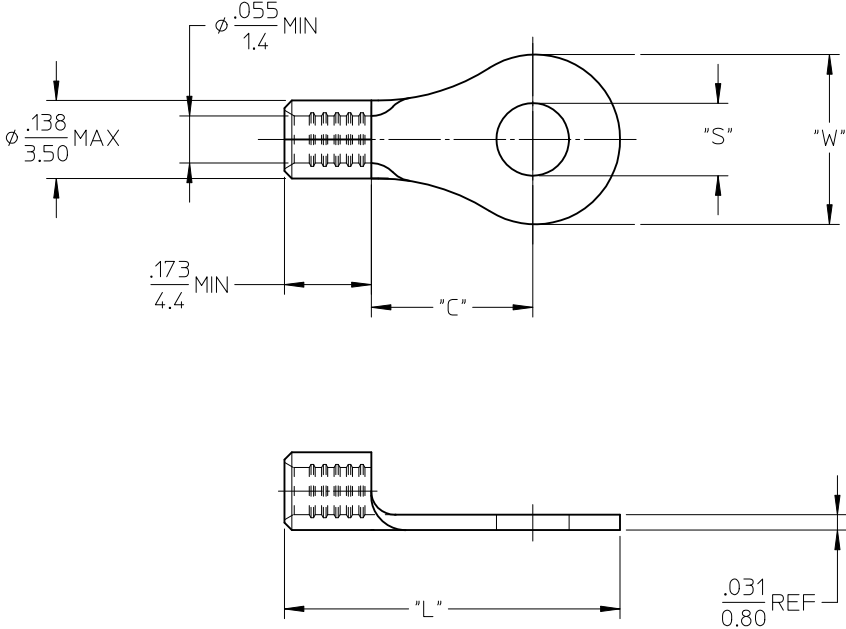

PARTS ON TAPE

- NOTE(S):
1. MATERIAL: STEEL
 2. WIRE SIZE: 22-18 AWG (0.25-1.5 MM²)
 3. FINISH: NICKEL PLATING
 4. PARTS ARE ROHS COMPLIANT.
 5. AMBIENT OPERATING TEMPERATURE UP TO 900 °F (483 °C).

TAPE HT, CONSOL P/N'S EC NO: WNA2010-0619 DRAWN:ETHRODAHL 2010/04/23 CHKD:JMACNEIL 2010/04/23 APPR:JMACNEIL 2010/06/01	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 4:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
				mm	INCH	DRAWN BY EHILE	DATE 2006/09/22	
		4 PLACES	± --- ± ---			CHECKED BY JMACNEIL	DATE 2006/09/22	RING TONGUE TERMINAL, 22-18 AWG, KRIMPTITE, 900 DEG F (483 DEG C) MOLEX INCORPORATED
		3 PLACES	± --- ± ---			APPROVED BY JMACNEIL	DATE 2006/09/22	
		2 PLACES	± --- ± ---			MATERIAL NO.	DOCUMENT NO.	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	ANGULAR ± --- °	1 PLACE	± --- ± ---			SEE CHART	SD-19203-036	SHEET NO. 1 OF 1
						SIZE B	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	