
OA5920 'Challenger Series'



AC Fan - 115V, 230V 172 x 150 x 51mm (6.7"x 5.9" x 2.0")



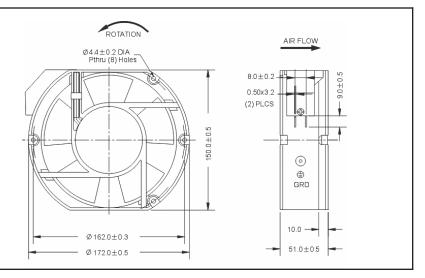

Frame	Diecast Aluminum	Operating Temperature	0.60			
Impeller	PBT, UL94V-0 plastic	Operating Temperature Ball Bearing -10C ~ +70C	0.50			
Connection	Terminals	Storage Temp -40C ~ +80C	("HZO)			
Motor	Shaded pole, thermally protected	Life Expectancy Ball Bearing 60,000 hours (L10 at 40C)	Static Pressure			
Bearing System	Dual ball (Sleeve available)	Weight: 2.0 lbs.	8 0.10			\
Insulation Resistance	>100M ohm between leadwire and frame (500VDC)		0.00	0 50	100 15	50 \
Dielectric Strength	1 min at 1500 VAC, 50/60Hz	m4			w (CFM)	U

Part Number	OA5920-12TB	OA5920-23TB
Nominal Voltage	115 VAC	230 VAC
Voltage Range	80 ~ 130 VAC	160 ~ 260 VAC
Rated Power	41 W (60Hz)	41 W (60Hz)
Rated Speed (RPM)	3000	3000
Airflow (CFM)	180	180
Noise Level (dB)	55	55
Max. Static Pressure	0.51" H ₂ O	0.51" H ₂ O



200