


## Inductive proximity switch

## IFRM 05N15A5/Q

## dimension drawing

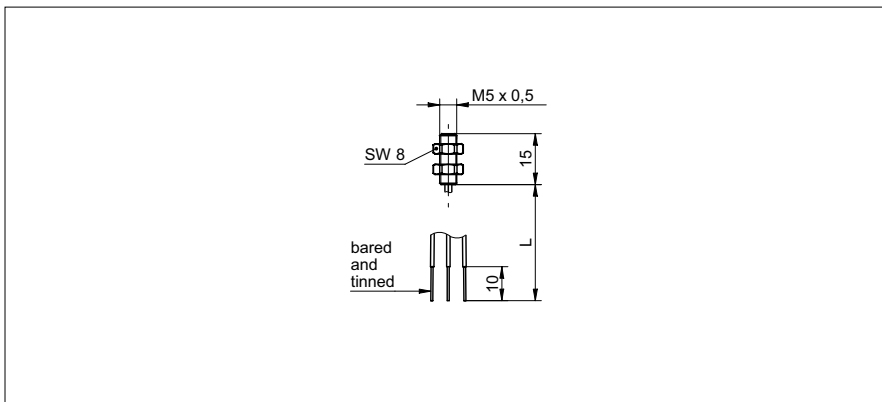

## general data

mounting type	shielded
nominal sensing distance $S_n$	1 mm
hysteresis	2 ... 20 % of $S_r$

## electrical data

switching frequency	< 5 kHz
voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	12 mA
output circuit	NPN make function (NO)
voltage drop $V_d$	< 2 VDC
output current	< 100 mA
short circuit protection	yes
reverse polarity protection	yes

## mechanical data

type	cylindrical threaded
material (sensing face)	LCP
housing material	stainless steel
dimension	5 mm
housing length	15 mm
connection types	wires, 0,5 m


## ambient conditions

operating temperature	-25 ... +75 °C
protection class	IP 67

## photo



## connection diagram

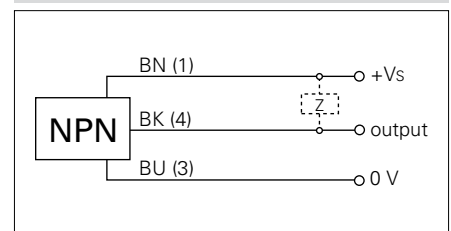

- fully contained, 3 individual strands
- 15 mm housing length