

This literature was published years prior to the establishment of Agilent Technologies as a company independent from Hewlett-Packard and describes products or services now available through Agilent. It may also refer to products/services no longer supported by Agilent. We regret any inconvenience caused by obsolete information. For the latest information on Agilent's test and measurement products go to:

www.agilent.com/find/products

Or in the U.S., call Agilent Technologies at 1-800-452-4844 (8am-8pm EST)



Agilent Technologies

Innovating the HP Way


HP V910C, HP W910C mm-Wave Precision Fixed Terminations



50.0 to 110.0 GHz

New Performance Standards for mm-Wave Measurements

Technical Data

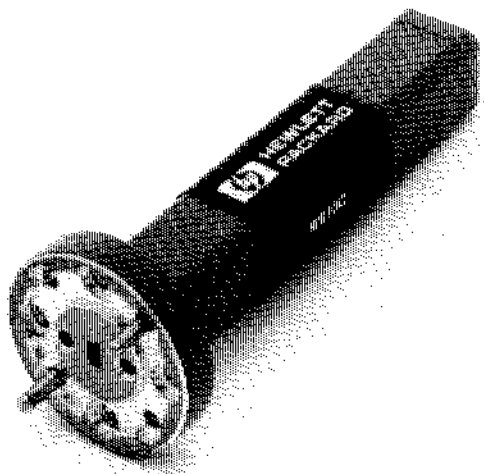

Specifications

HP Model #:	V910C	W910C
Frequency Range (GHz):	50.0 - 75.0	75.0 - 110.0
SWR (max.):	1.025	1.03
Maximum Input Power:	0.3W (avg.)	0.2W (avg.)
Fits Waveguide Size:		
ELA	WR-15	WR-10
MIL-W-85/x-xxx	3-019	3-025
Equivalent Flange:		
MIL-F-3922/xxx-xxx	67B-002	67B-010
UG-xxx/U	UG-385/U	UG-387/U (mod.)
Dimensions:		
Length:	cm. 5.6	5.6
	in. 2.2	2.2
Net Weight:	gm. 13	13
	lb. 0.03	0.03

HP's V910C and W910C precision fixed loads cover a frequency range of 50.0 to 75.0 GHz and 75.0 to 110.0 GHz respectively. They have been designed to have a maximum SWR of 1.025 for V-band and 1.03 for W-band. These precision fixed loads are ideal for the precise measurements of small reflections in transmission lines, and for calibration routines on measurement set-ups.

For more information, call your local HP sales office listed in the telephone directory white pages. Ask for the Technical Measurements Department. Or write to Hewlett-Packard:

United States
P.O. Box 10301
Palo Alto, CA 94303-0890
U.S.A.

Canada
6877 Goreway Drive
Mississauga, L4V 1M8
Ontario

**Europe, Africa,
Middle East**
Central Mailing Dept.
P.O. Box 529
1180 AM Amstelveen
The Netherlands

Japan
Yokogawa-Hewlett-Packard Ltd.
3-29-21, Takaido-Higashi
Suginami-ku, Tokyo 168

Elsewhere in the world:
Hewlett-Packard Company
Intercontinental Headquarters
3495 Deer Creek Road
Palo Alto, CA 94304-1393 U.S.A.