

SIDE-LOOK PACKAGE LIGHT EMITTING DIODE


● **Features:**

1. Selected to specific on-line intensity and radiant intensity ranges.
2. Low cost, plastic side looking package
3. Lens Appearance: Water Clear.
4. This product doesn't contain restriction substance, comply ROHS standard

● **Applications:**

1. Mouse
2. Automatic Control System.

● **Package Dimensions:**

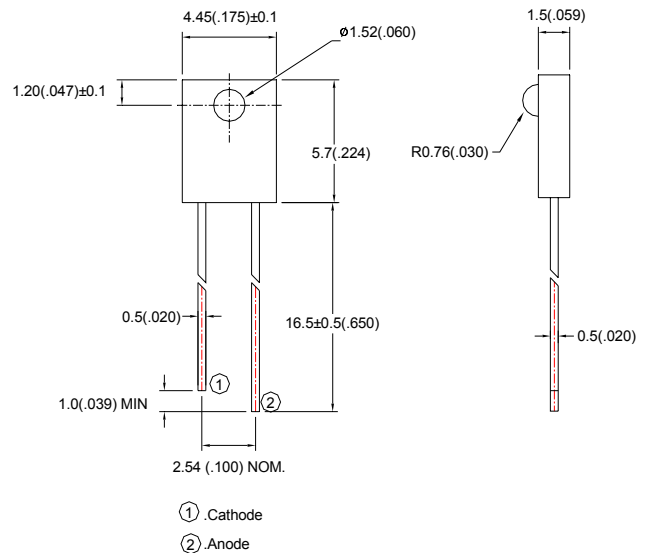

NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ (0.01") unless otherwise specified.
3. Lead spacing is measured where the leads emerge from the package.
4. Specifications are subject to change without notice.

● **Absolute Maximum Ratings(Ta=25°C)**

Parameter	Symbol	Rating	Unit
Power Dissipation	Pd	75	mW
Continuous Forward Current	I _F	50	mA
Peak Forward Current ^{*1}	I _{FP}	1.0	mA
Reverse Voltage	V _R	5	V
Operating Temperature	T _{opr}	-40°C ~ 85°C	-
Storage Temperature	T _{stg}	-45°C ~ 100°C	-
Soldering Temperature	T _{sol}	260°C (for 5 seconds)	-

*1 Condition for I_{FP} pulse of 1/10 duty and 0.1 msec width.

● Optical- Electrical Characteristics (@T_A=25°C)

Parameter	Symbol	Test Conditions	Min	TYP	Max	Unit
Radiant Intensity	E _e	I _f =4mA	0.4	0.60	-	mW/cm ²
Forward Voltage	V _F	I _F =20mA	-	1.2	1.5	V
Reverse Current	I _R	V _R =5V	-	-	100	μA
Peak Wavelength	λ _p	I _F =20mA	-	940	-	nm
Spectral Line Half- Width	Δλ	I _F =20mA	-	50	-	nm
Viewing Angle	2θ _{1/2}	I _F =20mA	-	45	-	deg

● Typical Optical-Electrical Characteristic Curves

FIG.1 Spectral Distribution

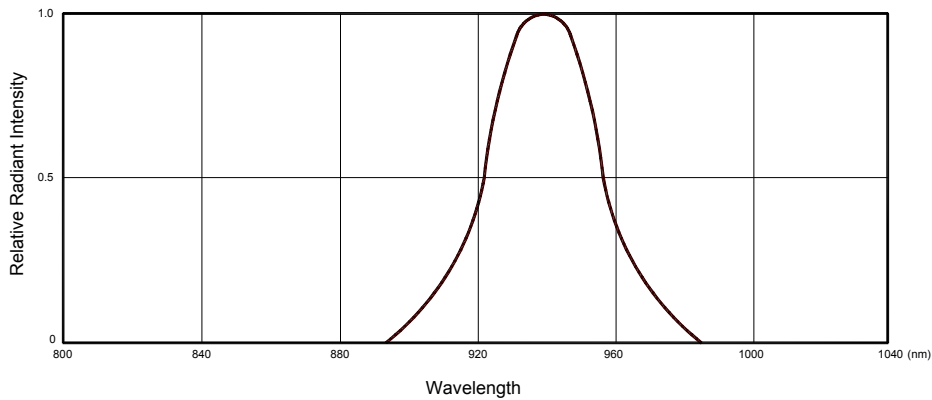


FIG.2 Forward Current Vs. Forward Voltage

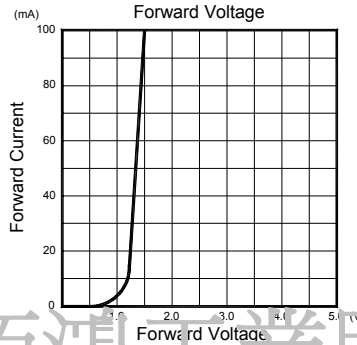


FIG.3 Relative Radiant Intensity Vs. Ambient Temperature

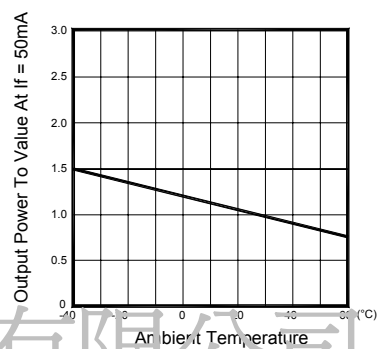


FIG.4 Relative Radiant Intensity Vs. Forward Current



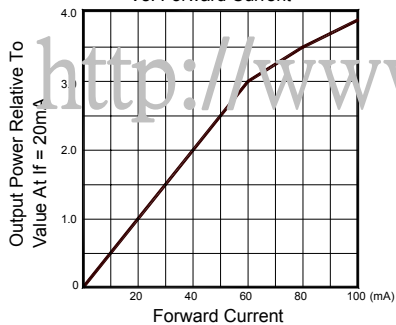



FIG.5 Radiant Diagram



● Tapping and packaging specifications(Units: mm)

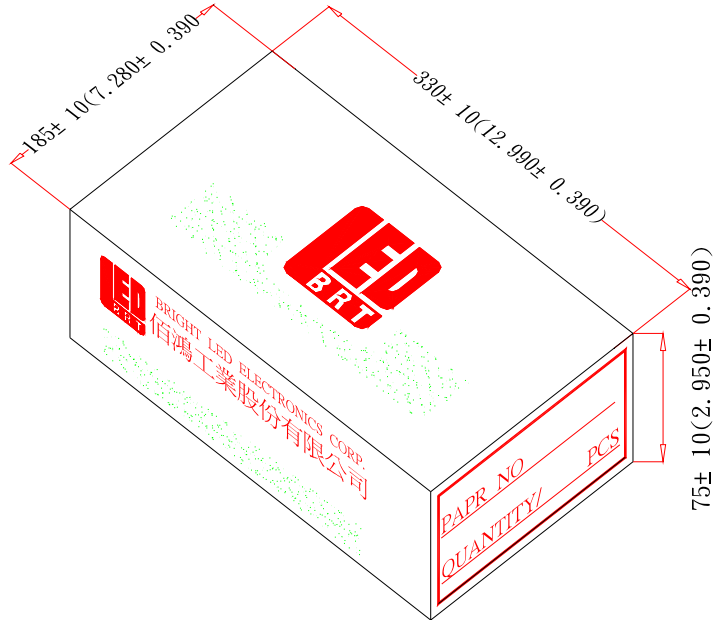

● Packaging Bag Dimensions

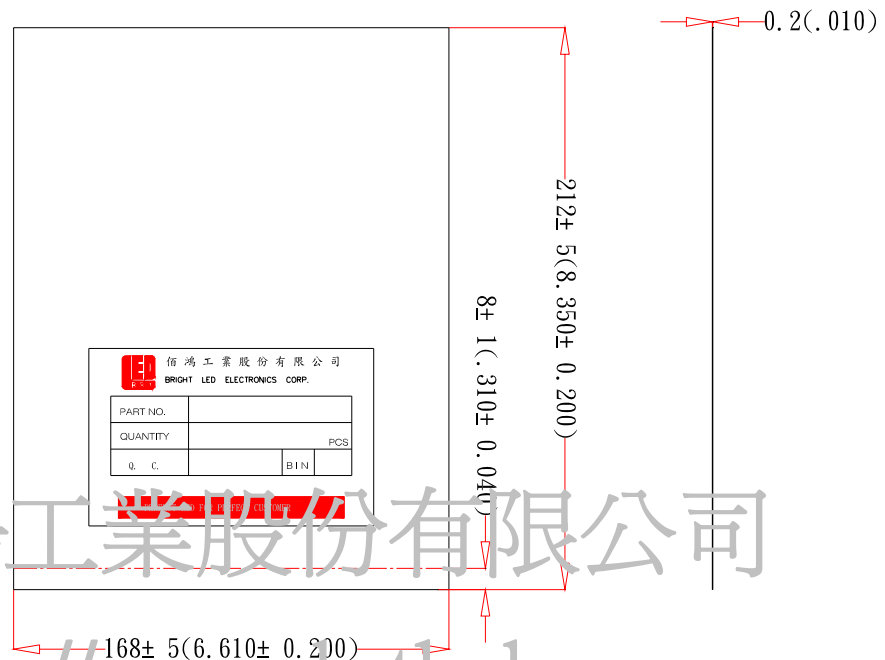

Notes:

- 1、1000pcs per bag, 8Kpcs per box.
- 2、All dimensions are in millimeters(inches).
- 3、Specifications are subject to change without notice.

<http://www.brtled.com>