

DIELECTRIC RESONATOR OSCILLATOR

Model 514057

6000 - 7000 MHz

Features

- Low Noise
- Rugged Construction for Extreme Environmental Conditions
- High Frequency Stability
- Mechanically Tuned

Specifications

CHARACTERISTIC	TYPICAL $T_a = +25^\circ\text{C}$	MIN/MAX $T_a = -55^\circ\text{C to } +85^\circ\text{C}$
Frequency	6000 - 7000 MHz	6000 - 7000 MHz
Output Power (dBm)	+13.0	+10.0 Min.
Power Flatness (dBm)	+/- 1.5	+/- 3.0
Frequency Stability (ppm)/ $^\circ\text{C}$	4	3 to 5
Harmonics (dBc)	-20	-15 Max.
Spurious (dBc)	-80	-80 Max.
Phase Noise (6000 MHz) @ 100 KHz (dBc/Hz)	-126	-124 Max.
Load VSWR	1.5:1	2.0:1 Max.
Power	Vdc m A	+15 70 +15 to +20 90 Max.





Absolute Maximum (No Damage) Ratings

Ambient Operating Temperature $-55^\circ\text{C to } +100^\circ\text{C}$
 Storage Temperature $-62^\circ\text{C to } +125^\circ\text{C}$
 Case Temperature $+125^\circ\text{C}$
 DC Voltage +24 Volts
 Maximum DC Tuning Voltage +20 Volts
 Minimum DC Tuning Voltage 0 Volts

NOTE: Care should always be taken to effectively ground the case of each unit.

Typical Performance Data

Phase Noise	Typical	Typical
Offset	6000 MHz	7000 MHz
1 kHz	-85	-82
10 kHz	-108	-105
100 kHz	-126	-125

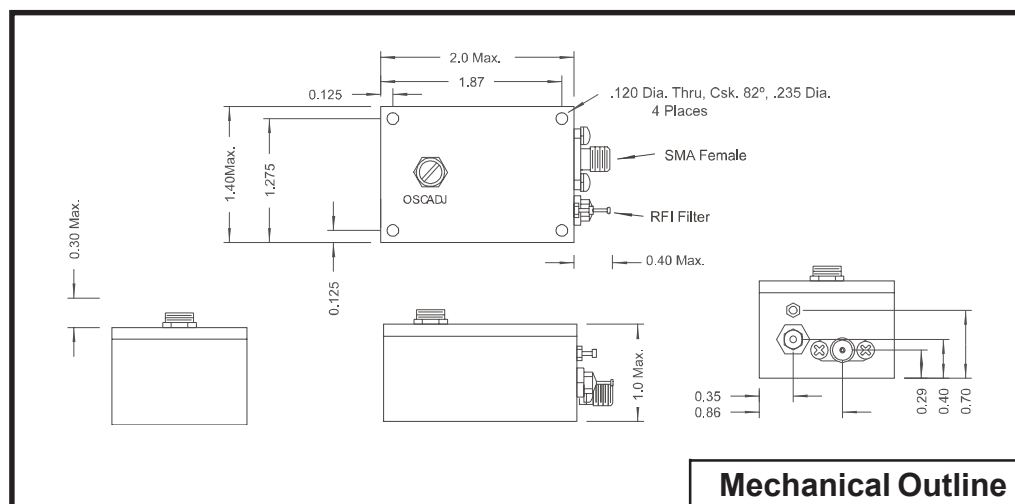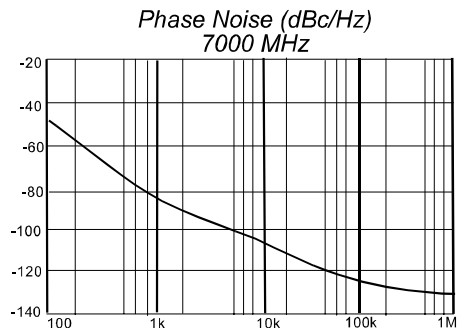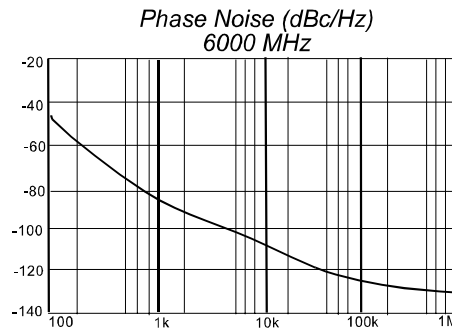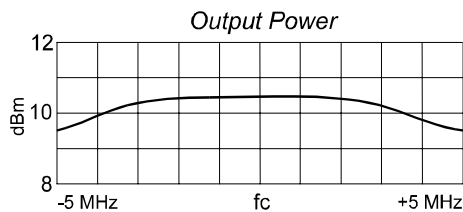

Mechanical Outline



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 Rev. 5/5/10

www.SpectrumMicrowave.com Spectrum Microwave · 2707 Black Lake Place · Philadelphia, Pennsylvania 19154 · PH (215) 464-4000 · Fax (215) 464-4001