


# Gap Pad® I000SF

Thermally Conductive, Silicone-Free Gap Filling Material


## Features and Benefits

- Thermal conductivity: 0.9 W/m-K
- No silicone outgassing
- No silicone extraction
- Reduced tack on one side to aid in application assembly
- Electrically isolating

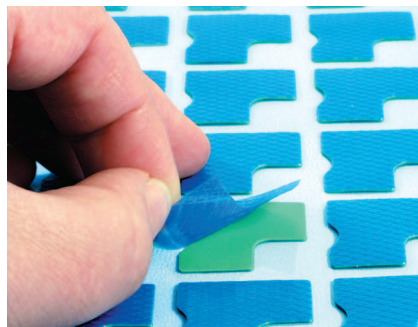

The new Gap Pad I000SF is a thermally conductive, electrically insulating, silicone-free polymer specially designed for silicone-sensitive applications. The material is ideal for applications with high standoff and flatness tolerances. Gap Pad I000SF is reinforced for easy material handling and added durability during assembly. The material is available with a protective liner on both sides of the material. The topside has reduced tack for ease of handling.

*Note: Resultant thickness is defined as the final gap thickness of the application.*

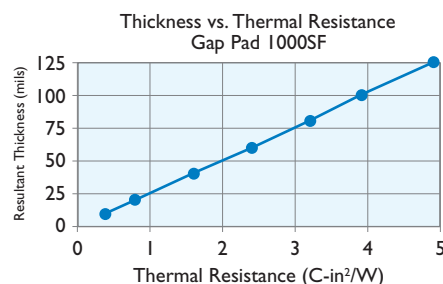

## TYPICAL PROPERTIES OF GAP PAD I000SF

| PROPERTY                              | IMPERIAL VALUE   | METRIC VALUE     | TEST METHOD |
|---------------------------------------|------------------|------------------|-------------|
| Color                                 | Green            | Green            | Visual      |
| Reinforcement Carrier                 | Fiberglass       | Fiberglass       | —           |
| Thickness (inch) / (mm)               | 0.010 to 0.125   | 0.254 to 3.175   | ASTM D374   |
| Inherent Surface Tack (1- or 2-sided) | 2                | 2                | —           |
| Density (g/cc)                        | 2.0              | 2.0              | ASTM D792   |
| Heat Capacity (J/g-K)                 | 1.1              | 1.1              | ASTM E1269  |
| Hardness, Bulk Rubber (Shore 00) (1)  | 40               | 40               | ASTM D2240  |
| Young's Modulus (psi) / (kPa) (2)     | 34               | 234              | ASTM D575   |
| Continuous Use Temp (°F) / (°C)       | -76 to 257       | -60 to 125       | —           |
| <b>ELECTRICAL</b>                     |                  |                  |             |
| Dielectric Breakdown Voltage (Vac)    | >6000            | >6000            | ASTM D149   |
| Dielectric Constant (1000 Hz)         | 5.0              | 5.0              | ASTM D150   |
| Volume Resistivity (Ohm-meter)        | 10 <sup>10</sup> | 10 <sup>10</sup> | ASTM D257   |
| Flame Rating                          | V-1              | V-1              | U.L. 94     |
| <b>THERMAL</b>                        |                  |                  |             |
| Thermal Conductivity (W/m-K)          | 0.9              | 0.9              | ASTM D5470  |

1) Thirty second delay value Shore 00 hardness scale.  
2) Young's Modulus, calculated using 0.01 in/min. step rate of strain with a sample size of 0.79 inch². For more information on Gap Pad modulus, refer to Bergquist Application Note #116.


## Typical Applications Include:

- Digital disk drives / CD-ROM
- Automotive modules
- Fiber optics modules

## Configurations Available:

- Sheet form
- Die-cut parts

## Building a Part Number

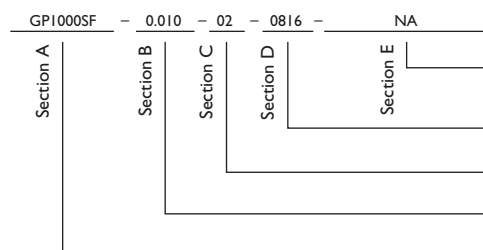

Note: To build a part number, visit our website at [www.bergquistcompany.com](http://www.bergquistcompany.com).

## Standard Options

example

NA = Selected standard option. If not selecting a standard option, insert company name, drawing number, and revision level.

0806 = Standard sheet size 8" x 16", or 00 = custom configuration

02 = Natural tack, both sides

Standard thicknesses available: 0.010", 0.015", 0.020", 0.040", 0.060", 0.080", 0.100", 0.125"

GPI000SF = Gap Pad I000SF Material



[www.bergquistcompany.com](http://www.bergquistcompany.com)

The Bergquist Company -  
North American Headquarters  
18930 West 78th Street  
Chanhassen, MN 55317  
Phone: 800-347-4572  
Fax: 952-835-0430

The Bergquist Company -  
European Headquarters  
Netherlands  
Phone: 31-35-5380684  
Fax: 31-35-5380295

The Bergquist Company -  
Asia Headquarters  
Hong Kong  
Phone: 852-2690-9296  
Fax: 852-2690-2344

All statements, technical information and recommendations herein are based on tests we believe to be reliable, and THE FOLLOWING IS MADE IN LIEU OF ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MARKETABILITY AND FITNESS FOR PURPOSE. Sellers' and manufacturers' only obligation shall be to replace such quantity of the product proved to be defective. Before using, user shall determine the suitability of the product for its intended use, and the user assumes all risks and liability whatsoever in connection therewith. NEITHER SELLER NOR MANUFACTURER SHALL BE LIABLE EITHER IN TORT OR IN CONTRACT FOR ANY LOSS OR DAMAGE, DIRECT, INCIDENTAL OR CONSEQUENTIAL, INCLUDING LOSS OF PROFITS OR REVENUE ARISING OUT OF THE USE OR THE INABILITY TO USE A PRODUCT. No statement, purchase order or recommendations by seller or purchaser not contained herein shall have any force or effect unless in an agreement signed by the officers of the seller and manufacturer.

PDS\_GP\_I000SF\_0711