

# 25A Avg. 1200 Volts


# FRED

# KSF25A120B

## 最大定格 Maximum Ratings

Item	Symbol	Conditions	Unit
くり返しピーク逆電圧 Repetitive Peak Reverse Voltage	$V_{RRM}$	1200	V
平均整流電流 Average Rectified Forward Current	$I_O$	50Hz, 正弦半波通電抵抗負荷 50Hz Half Sine Wave Resistive Load	$T_c=32^\circ\text{C}$ 25
実効順電流 R.M.S. Forward Current	$I_{F(RMS)}$	39	A
サージ順電流 Surge Forward Current	$I_{FSM}$	400 50Hz正弦半波, 1サイクル, 非くり返し 50Hz Half Sine Wave, 1cycle, Non-repetitive	A
動作接合温度範囲 Operating Junction Temperature Range	$T_{jw}$	-40~+150	$^\circ\text{C}$
保存温度範囲 Storage Temperature Range	$T_{stg}$	-40~+150	$^\circ\text{C}$
締付トルク Mounting torque	$F_{tor}$	推奨値 Recommended Value	0.5 N·m

## OUTLINE DRAWING(mm)

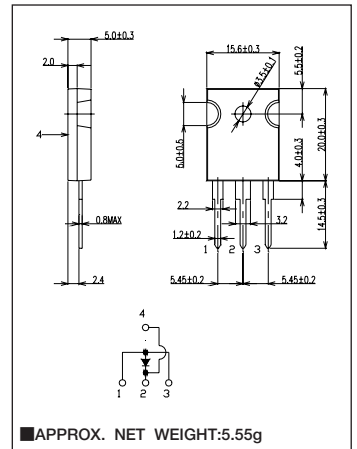

## 電氣的・熱的特性 Electrical/Thermal Characteristics

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
ピーク逆電流 Peak Reverse Current	$I_{RM}$	$T_j=150^\circ\text{C}, V_{RM}=V_{RRM}$	—	—	5	mA
ピーク順電圧 Peak Forward Voltage	$V_{FM}$	$T_j=25^\circ\text{C}, I_{FM}=25\text{A}$	—	—	2.5	V
逆回復時間 Reverse Recovery Time	$t_{rr}$	$I_{FM}=25\text{A}, -di/dt=200\text{A}/\mu\text{s}, T_j=25^\circ\text{C}$	—	—	200	ns
熱抵抗 Thermal Resistance	$R_{th(j-c)}$	接合部・ケース間 Junction to Case	—	—	1.5	$^\circ\text{C}/\text{W}$

## 定格・特性曲線

