

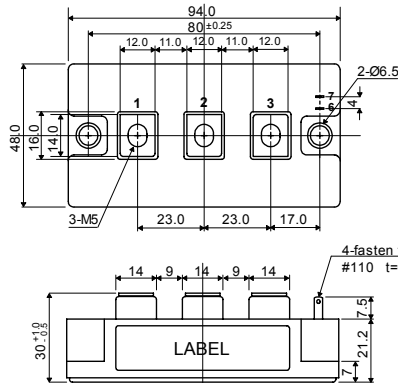


□ 回路図 : CIRCUIT

□ 外形寸法図 : OUTLINE DRAWING

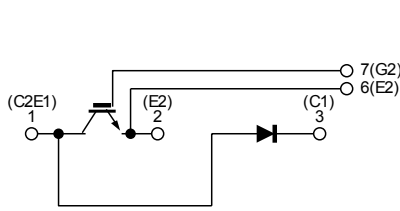

PRHMB150E6

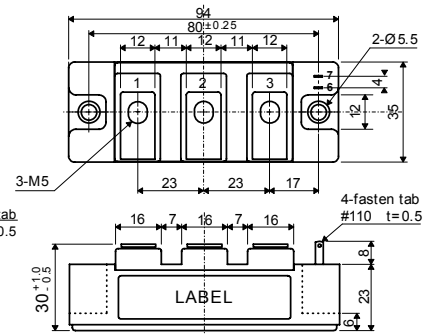

PRHMB150E6C

Dimension: [mm]

□ 最大定格 : MAXIMUM RATINGS (T_c = 25°C)

Item	Symbol	Rated Value	Unit		
コレクタ・エミッタ間電圧 Collector-Emmitter Voltage	V _{CEs}	600	V		
ゲート・エミッタ間電圧 Gate-Emmitter Voltage	V _{GES}	±20	V		
コレクタ電流 Collector Current	DC	I _C	A		
	1ms	I _{CP}		300	
コレクタ損失 Collector Power Dissipation	P _C	560	W		
接合温度 Junction Temperature Range	T _j	-40~+150	°C		
保存温度 Storage Temperature Range	T _{stg}	-40~+125	°C		
絶縁耐圧(Terminal to Base AC, 1 minute) Isolation Voltage	V _{ISO}	2,500	V (RMS)		
締め付けトルク Mounting Torque	Module Base to Heatsink Busbar to Main Terminal	F _{tor}	PDMB150E6	3 (30.6)	N・m (kgf・cm)
			PDMB150E6C	3 (30.6) 2 (20.4)	

□ 電気的特性 : ELECTRICAL CHARACTERISTICS (T_c = 25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit	
コレクタ遮断電流 Collector-Emmitter Cut-Off Current	I _{CEs}	V _{CE} = 600V, V _{GE} = 0V	—	—	1.0	mA	
ゲート漏れ電流 Gate-Emmitter Leakage Current	I _{GES}	V _{GE} = ±20V, V _{CE} = 0V	—	—	1.0	μA	
コレクタ・エミッタ間飽和電圧 Collector-Emmitter Saturation Voltage	V _{CE(sat)}	I _C = 150A, V _{GE} = 15V	—	2.1	2.6	V	
ゲートしきい値電圧 Gate-Emmitter Threshold Voltage	V _{GE(th)}	V _{CE} = 5V, I _C = 150mA	4.0	—	8.0	V	
入力容量 Input Capacitance	C _{ies}	V _{CE} = 10V, V _{GE} = 0V, f = 1MHz	—	7,500	—	pF	
スイッチング時間 Switching Time	上昇時間 Rise Time	V _{CC} = 300V R _l = 2.0Ω R _g = 5.1Ω V _{GE} = ±15V	t _r	—	0.15	0.30	μs
	ターンオン時間 Turn-on Time		t _{on}	—	0.25	0.40	
	下降時間 Fall Time		t _f	—	0.10	0.35	
	ターンオフ時間 Turn-off Time		t _{off}	—	0.35	0.70	

□ フリーホイールダイオードの特性 : FREE WHEELING DIODE RATINGS & CHARACTERISTICS (T_c = 25°C)

Item	Symbol	Rated Value	Unit
順電流 Forward Current	DC	I _F	A
	1ms	I _{FM}	

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
順電圧 Peak Forward Voltage	V _F	I _F = 150A, V _{GE} = 0V	—	1.9	2.4	V
逆回復時間 Reverse Recovery Time	t _{rr}	I _F = 150A, V _{GE} = -10V di/dt = 300A/μs	—	0.15	0.25	μs

□ 熱的特性 : THERMAL CHARACTERISTICS

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit	
熱抵抗 Thermal Impedance	R _{th(j-c)}	I _{GBT}	Junction to Case (T _c 測定点チップ直下)	—	—	0.22	°C/W
		Diode		—	—	0.45	

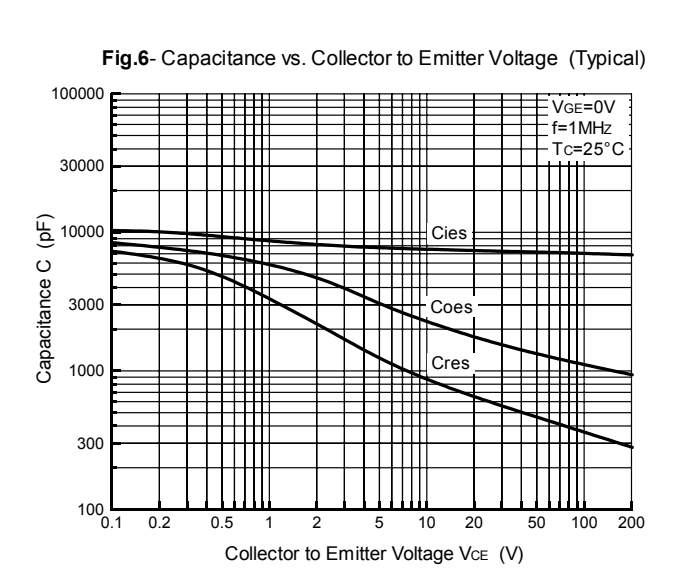
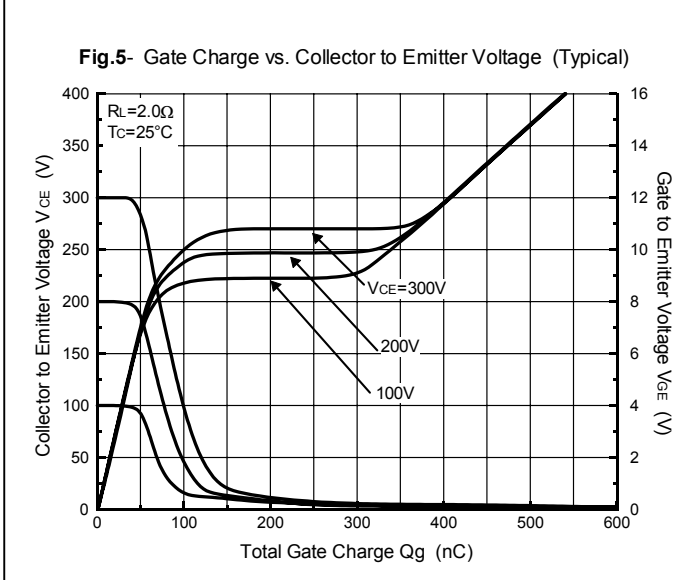
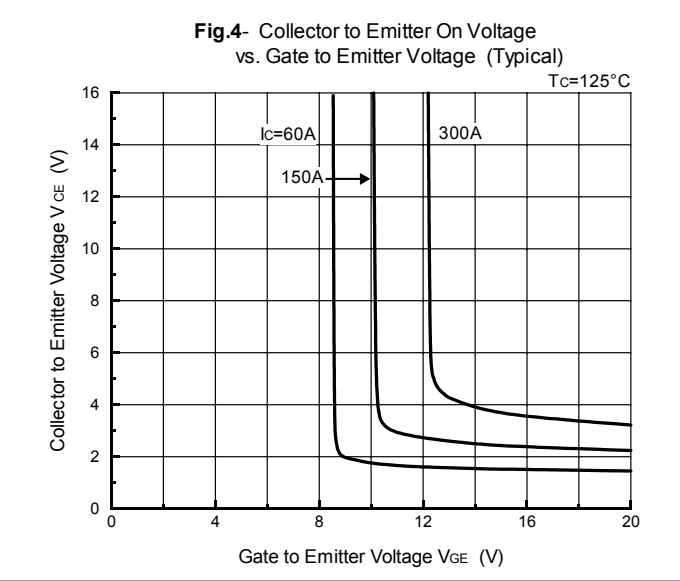
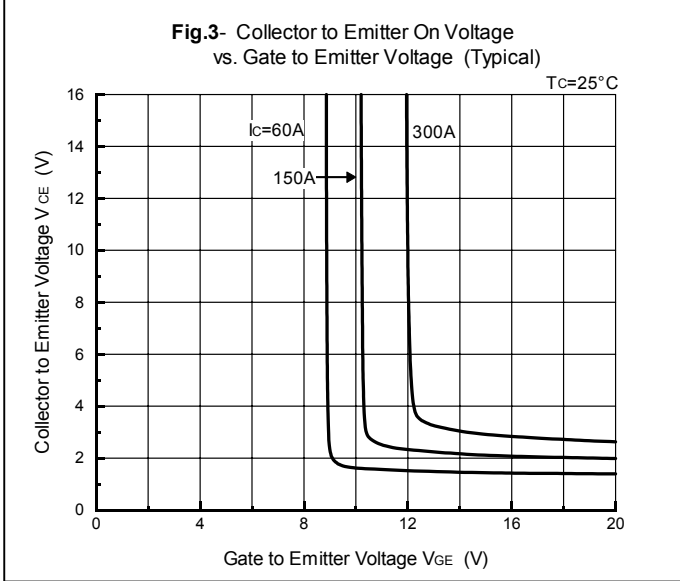
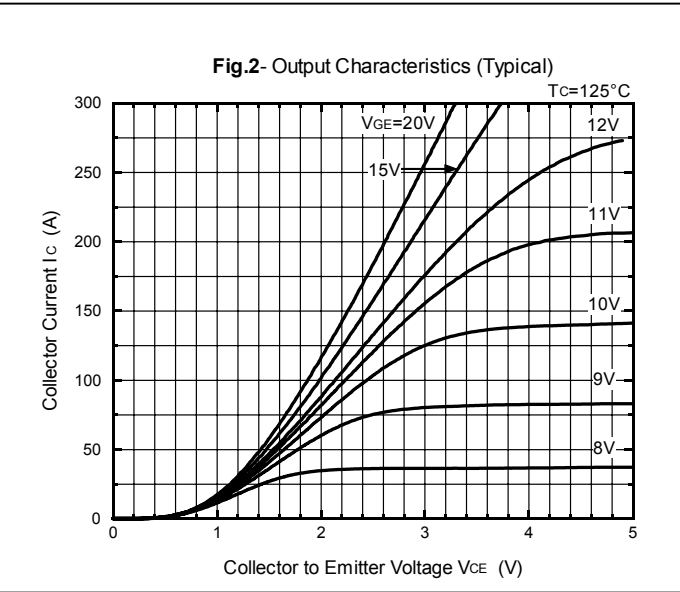
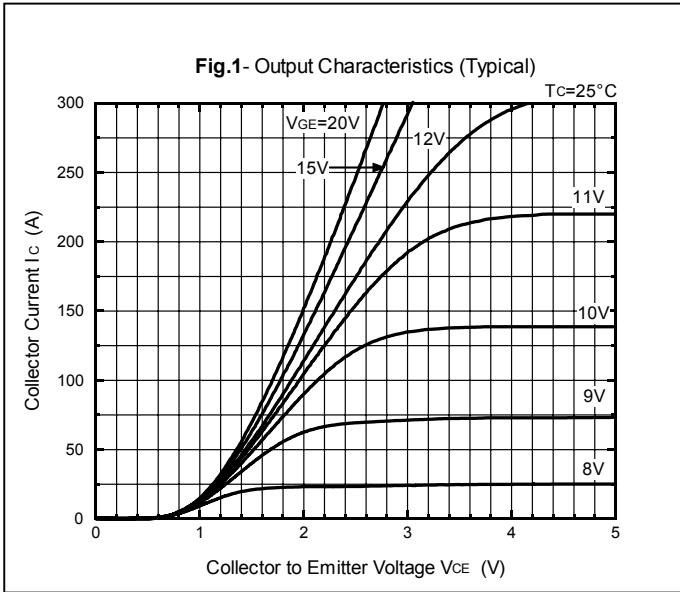


Fig.7- Collector Current vs. Switching Time (Typical)

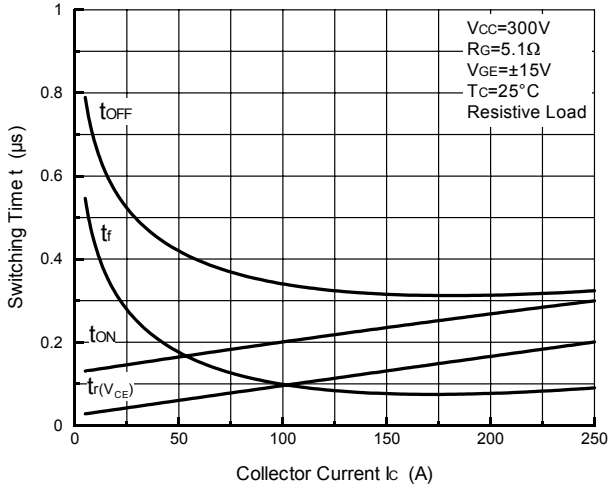


Fig.8- Series Gate Impedance vs. Switching Time (Typical)

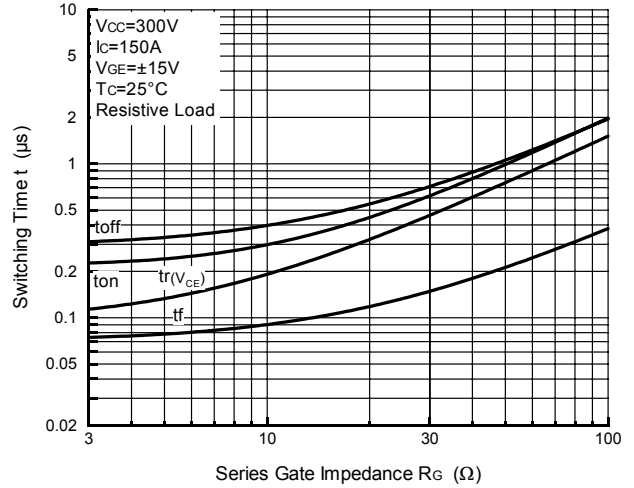


Fig.9- Collector Current vs. Switching Time

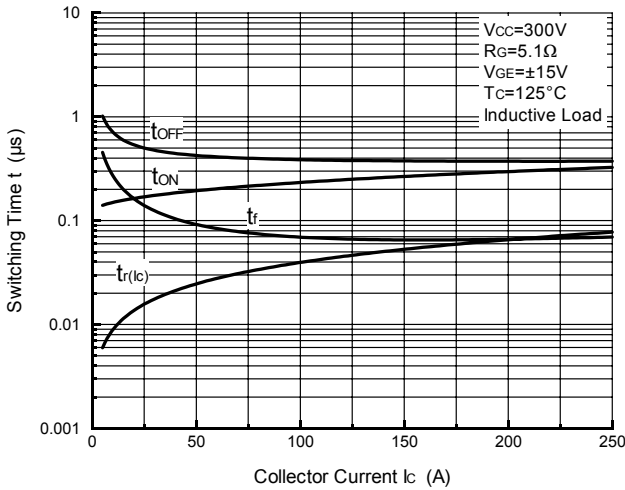


Fig.10- Series Gate Impedance vs. Switching Time (Inductive Load)

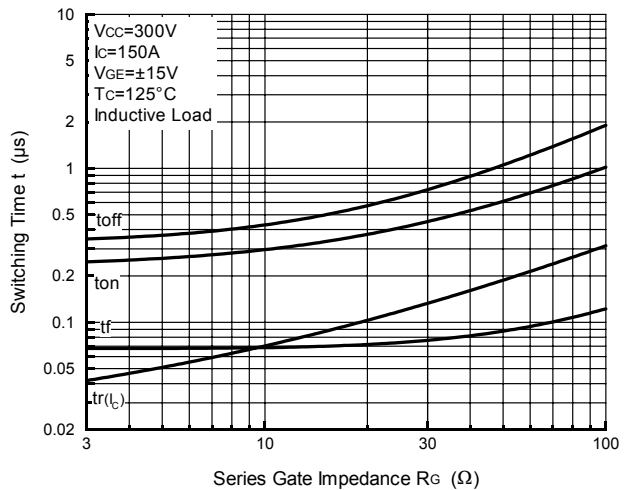


Fig.11- Collector Current vs. Switching Loss

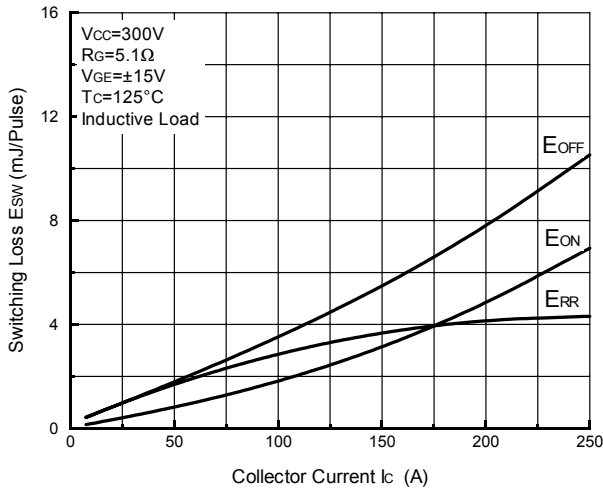


Fig.12- Series Gate Impedance vs. Switching Loss (Inductive Load)

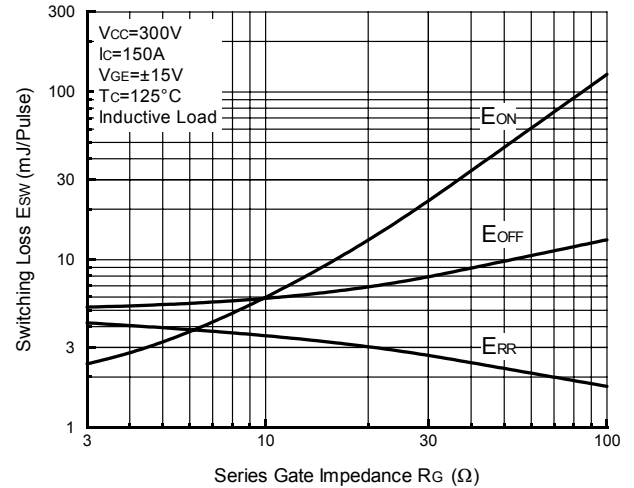


Fig.13- Forward Characteristics of Free Wheeling Diode (Typical)

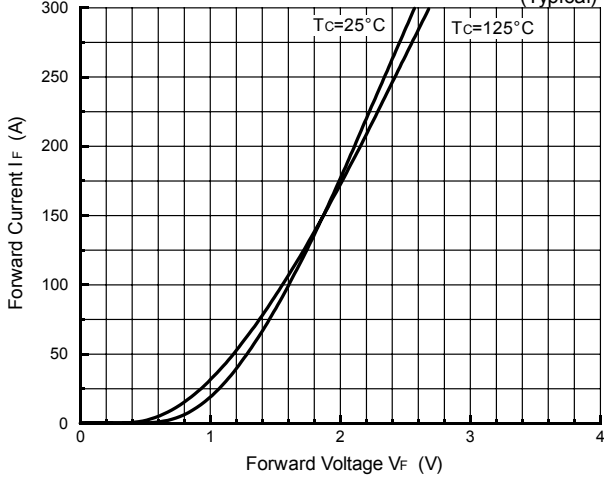


Fig.14- Reverse Recovery Characteristics (Typical)

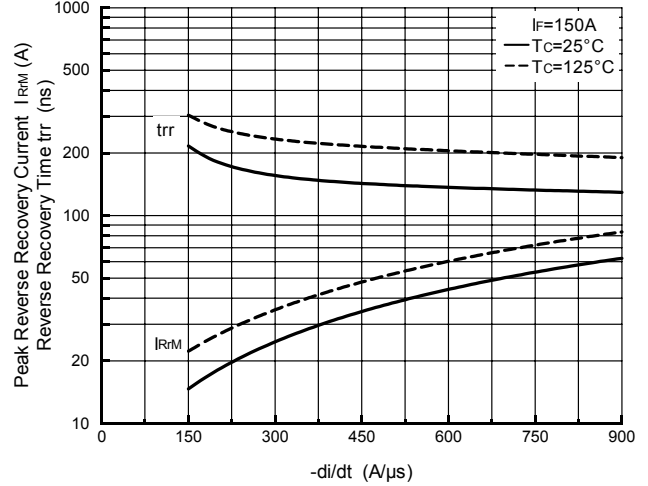


Fig.15- Reverse Bias Safe Operating Area

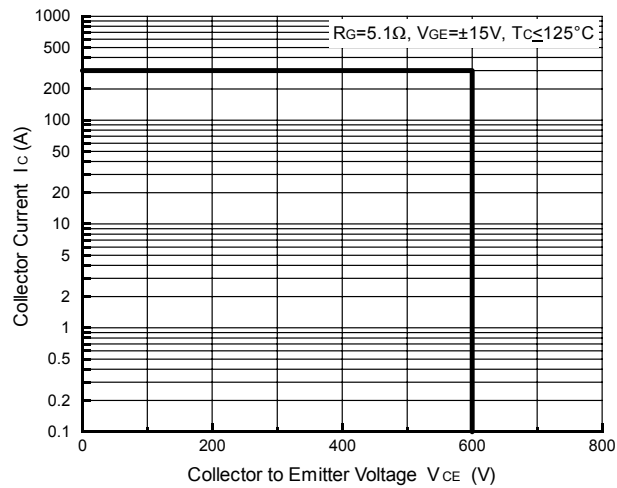


Fig.16- Transient Thermal Impedance

