


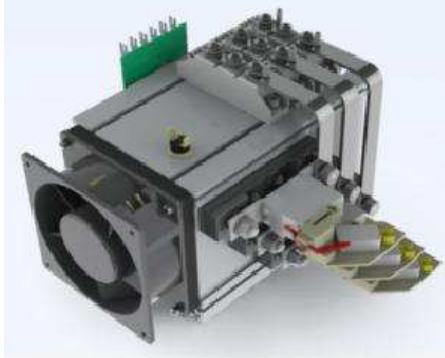

Thyristor Module stack

SEMISTACK® CLASSICS - W3C

Three phase reverse parallel thyristor converter

Preliminary Data

Ordering No. 08785229
Description SKS 140F W3C 120 V16 SU

Features

- Isolated power stacks
- SKKT 106/16
- Heatsink P3/180
- Forced air cooling
- RC circuit included
- Fuses with microswitches
- Thermal trip included

Typical Applications

- Soft starters

Remarks

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee, expressed or implied, is made regarding delivery, performance or suitability.

Electrical Characteristics							
Symbol	Conditions			min	typ	max	Unit
Electrical Data							
I _{OUT}	Maximum output current	T _{AMBIENT} = 35°C ; No overload			140		A _{RMS}
V _{AC}	Maximum AC voltage (+/-10%)				500		V _{AC}
P _{TOTAL}	Maximum stack power				120		kW
P _{LOSS}	Stack power loss (T _{AMBIENT} = 35°C)						W


Environmental Data					
Symbol	Conditions	min	typ	max	Unit
Mechanical Data					
Drawing	SEMIKRON document number.revision.version	12041002.00			-
Weight	Approximate total weight	5.4			kg
Altitude	Installation altitude without derating	1 000			m
Protection	IEC 60529	IP00			-
Pollution Degree	EN 50178	2			-

Fan Data			
Type	SEMIKRON fan designation	SKF 3-230-01	-
V_{FAN}	Fan voltage	230	V_{AC}
f_{FAN}	Fan frequency	50/60	Hz
I_{FAN}	Fan maximum input current	0.12/0.10	A
P_{FAN}	Fan power	15/14	W


Stack Protection						
Symbol	Conditions		min	typ	max	Unit
RC Circuit						
Type	RC in parallel with each switch		RC25B		-	
R	Resistance (10W)		68		Ohm	
C			0.1		uF	

Fuses			
Size	1 fuse per phase, with microswitches	000	-
$I_{N RMS}$	Caliber	160	A
U_N	Nominal voltage (IEC)	690	V
I^2t	Total at U_N at room temperature (approx. 20...25°C)	17.44	kA^2s

Bimetal Thermal Trip			
T_S	Switching temperature over which thermal trip is open	85	$^{\circ}C$
$I_{TC MAX}$	Maximum permissible current at 240VAC	1	A
	at 30Vdc	3	A

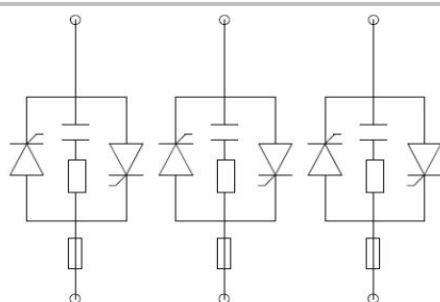

W3C

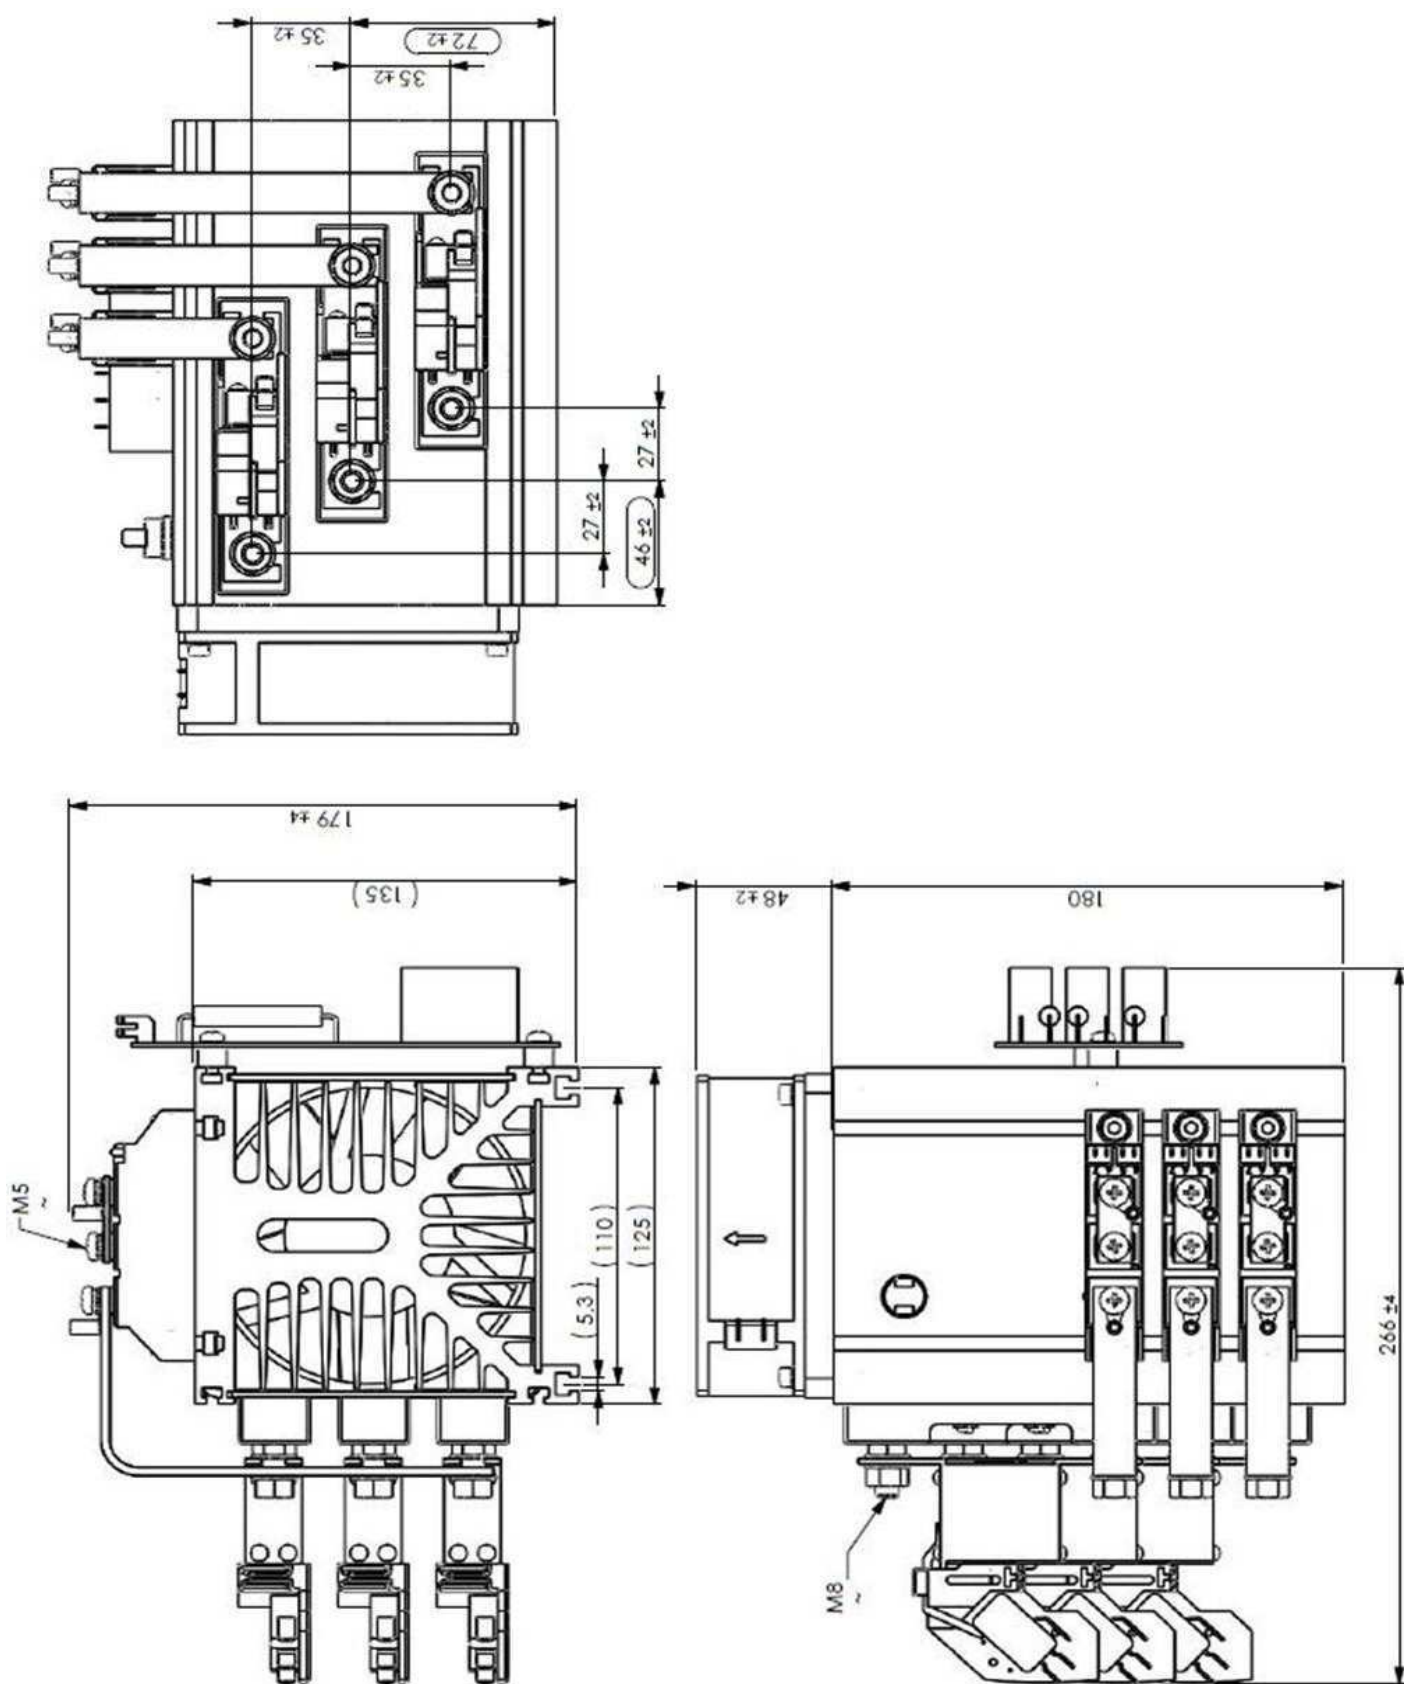

Dimensions

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.