

Provisional Data

## Rectifier Diode

### Types W104CF#200 to W104CF#220

#### Absolute Maximum Ratings

|           | VOLTAGE RATINGS                               | MAXIMUM LIMITS | UNITS |
|-----------|-----------------------------------------------|----------------|-------|
| $V_{RRM}$ | Repetitive peak reverse voltage, (note 1)     | 2000-2200      | V     |
| $V_{RSM}$ | Non-repetitive peak reverse voltage, (note 1) | 2100-2300      | V     |

|               | OTHER RATINGS                                                           | MAXIMUM LIMITS    | UNITS       |
|---------------|-------------------------------------------------------------------------|-------------------|-------------|
| $I_{F(AV)M}$  | Maximum average forward current, $T_{sink}=55^{\circ}C$ , (note 2)      | 10450             | A           |
| $I_{F(AV)M}$  | Maximum average forward current, $T_{sink}=100^{\circ}C$ , (note 2)     | 7725              | A           |
| $I_{F(AV)M}$  | Maximum average forward current, $T_{sink}=100^{\circ}C$ , (note 3)     | 4815              | A           |
| $I_{F(RMS)}$  | Nominal RMS forward current, $T_{sink}=25^{\circ}C$ , (note 2)          | 18825             | A           |
| $I_{F(d.c.)}$ | D.C. forward current, $T_{sink}=25^{\circ}C$ , (note 4)                 | 16600             | A           |
| $I_{FSM}$     | Peak non-repetitive surge $t_p=10ms$ , $V_{rm}=60\%V_{RRM}$ , (note 5)  | 83.7              | kA          |
| $I_{FSM2}$    | Peak non-repetitive surge $t_p=10ms$ , $V_{rm}\leq 10V$ , (note 5)      | 92.0              | kA          |
| $I^2t$        | $I^2t$ capacity for fusing $t_p=10ms$ , $V_{rm}=60\%V_{RRM}$ , (note 5) | $35.0\times 10^6$ | $A^2s$      |
| $I^2t$        | $I^2t$ capacity for fusing $t_p=10ms$ , $V_{rm}\leq 10V$ , (note 5)     | $42.3\times 10^6$ | $A^2s$      |
| $T_{j op}$    | Operating temperature range                                             | -40 to +175       | $^{\circ}C$ |
| $T_{stg}$     | Storage temperature range                                               | -55 to +175       | $^{\circ}C$ |

Notes:-

- 1) De-rating factor of 0.13% per  $^{\circ}C$  is applicable for  $T_j$  below  $25^{\circ}C$ .
- 2) Double side cooled, single phase; 50Hz,  $180^{\circ}$  half-sinewave.
- 3) Single side cooled, single phase; 50Hz,  $180^{\circ}$  half-sinewave.
- 4) Double side cooled.
- 5) Half-sinewave;  $175^{\circ}C$   $T_j$  initial.

**Characteristics**

|            | PARAMETER                                | MIN. | TYP.       | MAX.             | TEST CONDITIONS (Note 1)                                             | UNITS      |
|------------|------------------------------------------|------|------------|------------------|----------------------------------------------------------------------|------------|
| $V_{FM}$   | Maximum peak forward voltage             | -    | -          | 0.9              | $I_{FM}=4500A$                                                       | V          |
| $V_{FM}$   | Maximum peak forward voltage             | -    | -          | 1.04             | $I_{FM}=8000A$                                                       | V          |
| $V_{T0}$   | Threshold voltage                        | -    | -          | 0.709            |                                                                      | V          |
| $r_T$      | Slope resistance                         | -    | -          | 0.041            |                                                                      | m $\Omega$ |
| $I_{RRM}$  | Peak reverse current                     | -    | -          | 20<br>200        | Rated $V_{RRM}$ , $T_f=25^\circ C$<br>Rated $V_{RRM}$                | mA         |
| $Q_{rr}$   | Recovered charge                         | -    | 6600       | 7500             | $I_{TM}=4000A$ , $t_p=2000\mu s$ , $di/dt=10A/\mu s$ ,<br>$V_f=100V$ | $\mu C$    |
| $Q_{ra}$   | Recovered charge, 50% Chord              | -    | 5800       | -                |                                                                      | $\mu C$    |
| $I_{rm}$   | Reverse recovery current                 | -    | 280        | -                |                                                                      | A          |
| $t_{rr}$   | Reverse recovery time, 50% chord         | -    | 41         | -                |                                                                      | $\mu s$    |
| $R_{thJK}$ | Thermal resistance, junction to heatsink | -    | -          | 0.0065<br>0.0130 | Double side cooled<br>Single side cooled                             | K/W<br>K/W |
| F          | Mounting force                           | 81   | -          | 99               | Note 2                                                               | kN         |
| $W_t$      | Weight                                   | -    | 2.0<br>2.8 | -                | Outline option FD<br>Outline options FC                              | kg         |

Notes:-

- 1) Unless otherwise indicated  $T_f=175^\circ C$ .
- 2) For other clamp forces, please consult factory.

**Notes on Ratings and Characteristics****1.0 Voltage Grade Table**

| Voltage Grade | $V_{RRM}$<br>V | $V_{RSM}$<br>V | $V_R$<br>DC V |
|---------------|----------------|----------------|---------------|
| 20            | 2000           | 2100           | 1250          |
| 22            | 2200           | 2300           | 1350          |

**2.0 Extension of Voltage Grades**

This report is applicable to other voltage grades when supply has been agreed by Sales/Production.

**3.0 De-rating Factor**

A blocking voltage de-rating factor of 0.13%/°C is applicable to this device for  $T_j$  below 25°C.

**4.0 Snubber Components**

When selecting snubber components, care must be taken not to use excessively large values of snubber capacitor or excessively small values of snubber resistor. Such excessive component values may lead to device damage due to the large resultant values of snubber discharge current. If required, please consult the factory for assistance.

**5.0 Computer Modelling Parameters****5.1 Device Dissipation Calculations**

$$I_{AV} = \frac{-V_{T0} + \sqrt{V_{T0}^2 + 4 \cdot ff^2 \cdot r_T \cdot W_{AV}}}{2 \cdot ff^2 \cdot r_T} \quad \text{and:} \quad W_{AV} = \frac{\Delta T}{R_{th}}$$

$$\Delta T = T_{j\max} - T_K$$

Where  $V_{T0}=0.709V$ ,  $r_T=0.041m\Omega$

$R_{th}$  = Supplementary thermal impedance, see table below and

$ff$  = Form factor, see table below.

| Supplementary Thermal Impedance |               |                |               |        |
|---------------------------------|---------------|----------------|---------------|--------|
| Conduction Angle                | 6 phase (60°) | 3 phase (120°) | ½ wave (180°) | d.c.   |
| Square wave Double Side Cooled  | 0.00707       | 0.00689        | 0.00673       | 0.0065 |
| Square wave Single Side Cooled  | 0.01359       | 0.01349        | 0.01323       | 0.0130 |
| Sine wave Double Side Cooled    | 0.00697       | 0.00678        | 0.00654       |        |
| Sine wave Single Side Cooled    | 0.01348       | 0.01328        | 0.01303       |        |

| Form Factors     |               |                |               |      |
|------------------|---------------|----------------|---------------|------|
| Conduction Angle | 6 phase (60°) | 3 phase (120°) | ½ wave (180°) | d.c. |
| Square wave      | 2.449         | 1.732          | 1.414         | 1    |
| Sine wave        | 2.778         | 1.879          | 1.57          |      |

### 5.2 Calculating $V_F$ using ABCD Coefficients

The on-state characteristic  $I_F$  vs.  $V_F$ , on page 6 is represented in two ways;

- (i) the well established  $V_{T0}$  and  $r_T$  tangent used for rating purposes and
- (ii) a set of constants A, B, C, D, forming the coefficients of the representative equation for  $V_F$  in terms of  $I_F$  given below:

$$V_F = A + B \cdot \ln(I_F) + C \cdot I_F + D \cdot \sqrt{I_F}$$

The constants, derived by curve fitting software, are given below for both hot and cold characteristics. The resulting values for  $V_F$  agree with the true device characteristic over a current range, which is limited to that plotted.

| 25°C Coefficients |                           | 175°C Coefficients |                           |
|-------------------|---------------------------|--------------------|---------------------------|
| A                 | 0.7528241                 | A                  | 0.3017991                 |
| B                 | $8.33323 \times 10^{-3}$  | B                  | 0.04496923                |
| C                 | $3.26735 \times 10^{-6}$  | C                  | $2.19531 \times 10^{-5}$  |
| D                 | $3.115014 \times 10^{-3}$ | D                  | $1.759866 \times 10^{-3}$ |

### 5.3 D.C. Thermal Impedance Calculation

$$r_t = \sum_{p=1}^{p=n} r_p \cdot \left( 1 - e^{\frac{-t}{\tau_p}} \right)$$

Where  $p = 1$  to  $n$ ,  $n$  is the number of terms in the series and:

$t$  = Duration of heating pulse in seconds.

$r_t$  = Thermal resistance at time  $t$ .

$r_p$  = Amplitude of  $p_{th}$  term.

$\tau_p$  = Time Constant of  $r_{th}$  term.

The coefficients for this device are shown in the tables below:

| D.C. Double Side Cooled |                           |                           |                           |                           |
|-------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| Term                    | 1                         | 2                         | 3                         | 4                         |
| $r_p$                   | $3.424745 \times 10^{-3}$ | $1.745273 \times 10^{-3}$ | $8.532017 \times 10^{-4}$ | $3.457329 \times 10^{-4}$ |
| $\tau_p$                | 1.125391                  | 0.1878348                 | 0.02788979                | $8.430889 \times 10^{-3}$ |

| D.C. Single Side Cooled |                           |                           |                           |                          |
|-------------------------|---------------------------|---------------------------|---------------------------|--------------------------|
| Term                    | 1                         | 2                         | 3                         | 4                        |
| $r_p$                   | $8.375269 \times 10^{-3}$ | $2.518437 \times 10^{-3}$ | $1.193758 \times 10^{-3}$ | $7.45432 \times 10^{-4}$ |
| $\tau_p$                | 8.929845                  | 0.4711304                 | 0.08221244                | 0.01221961               |

## Curves

Figure 1 – Forward characteristics of Limit device

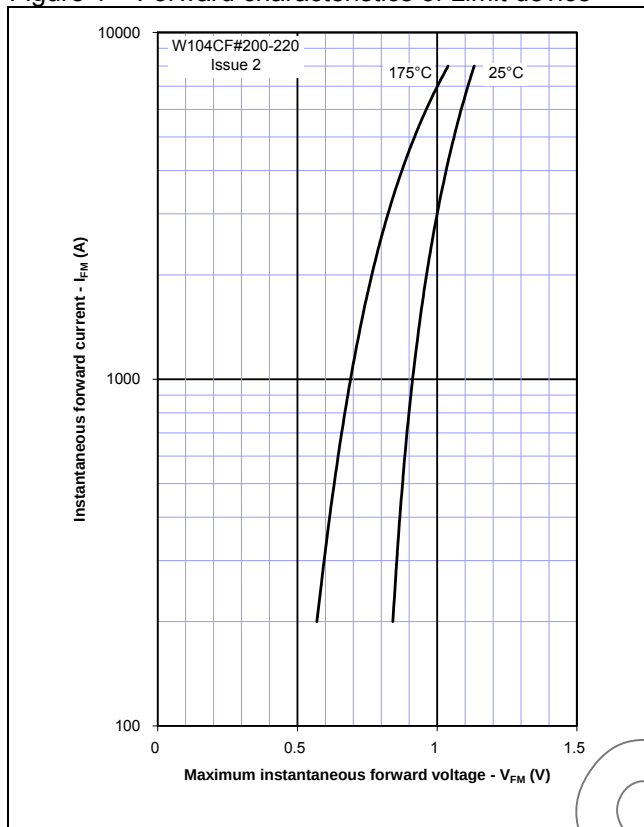


Figure 2 – Transient thermal impedance

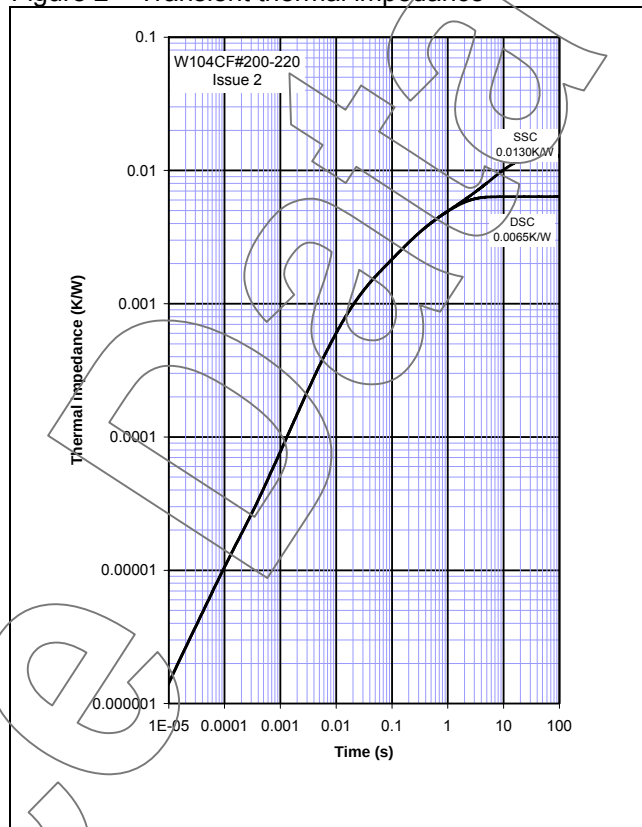


Figure 3 – Maximum Surge Rating

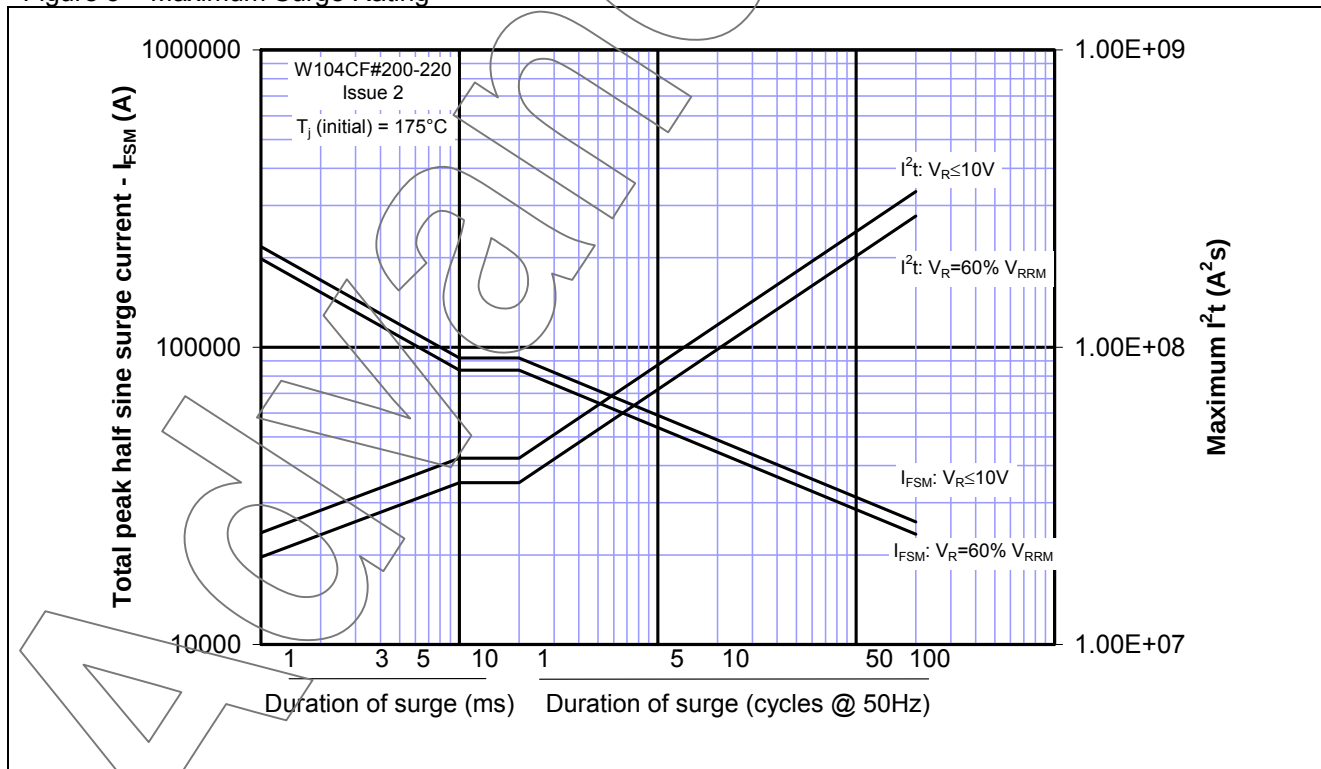


Figure 4 – Total recovered charge,  $Q_{rr}$

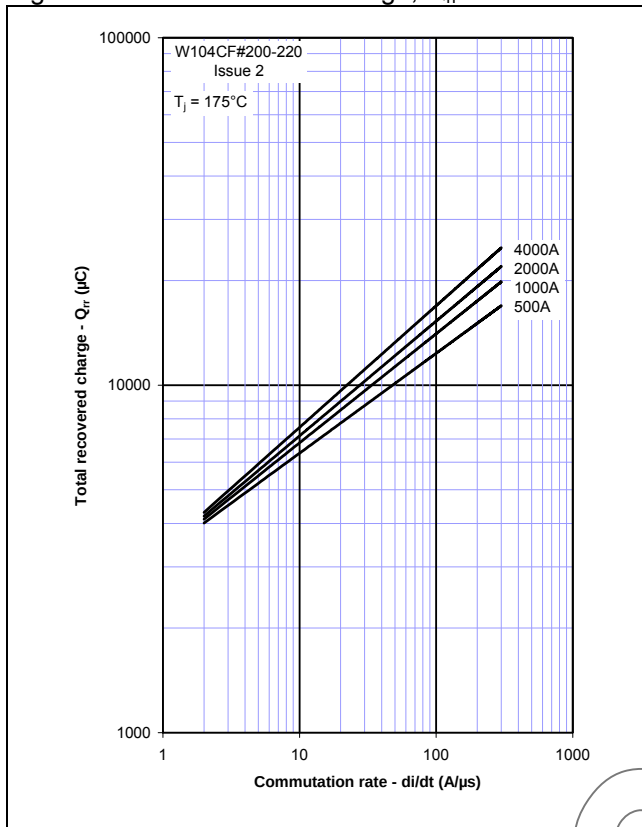


Figure 5 – Recovered charge,  $Q_{ra}$  (50% chord)

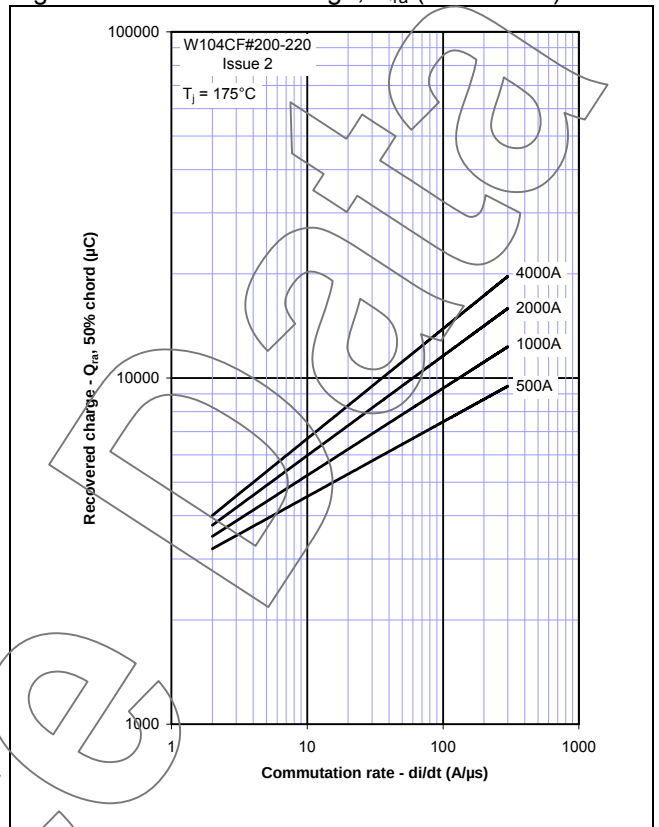


Figure 6 – Peak reverse recovery current,  $I_{rm}$

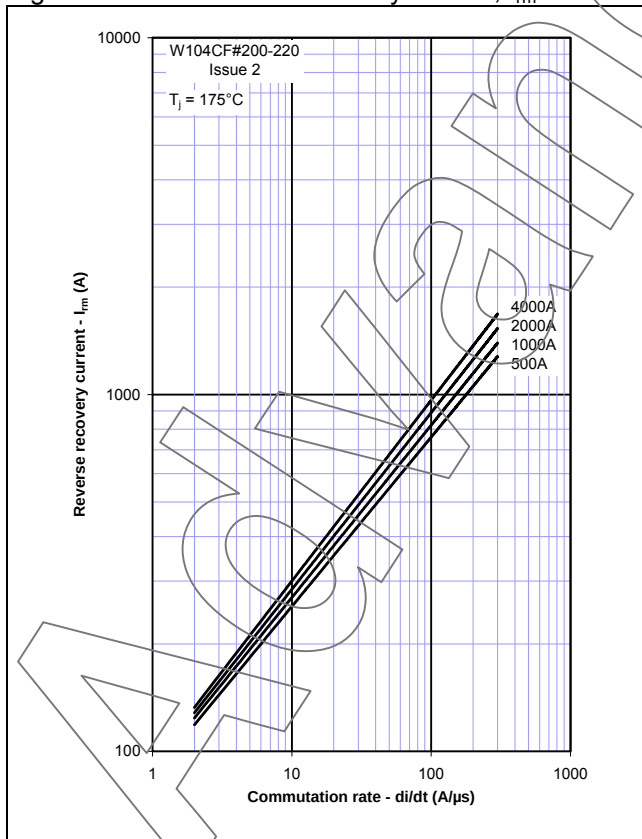


Figure 7 – Maximum recovery time,  $t_{rr}$  (50% chord)

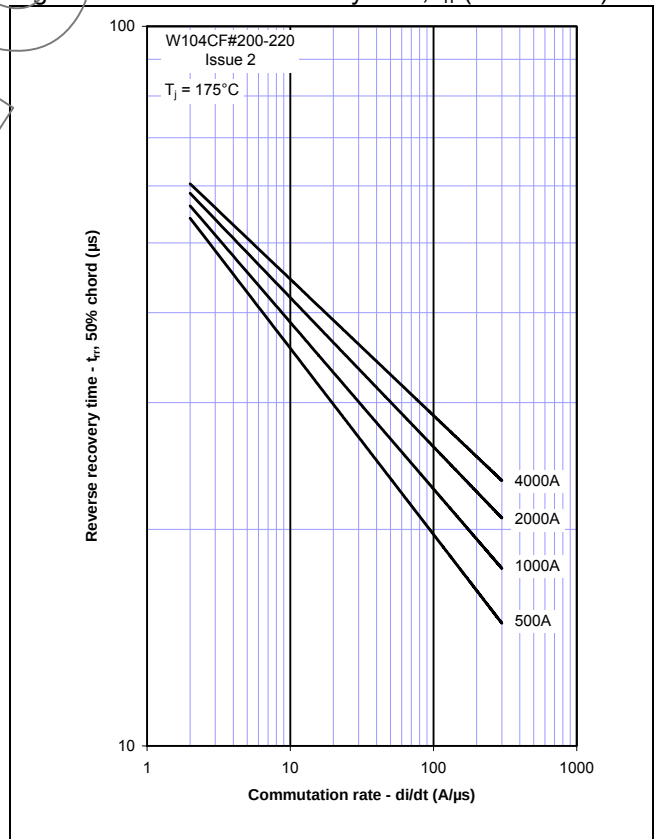


Figure 8 – Forward current vs. Power dissipation – Double Side Cooled

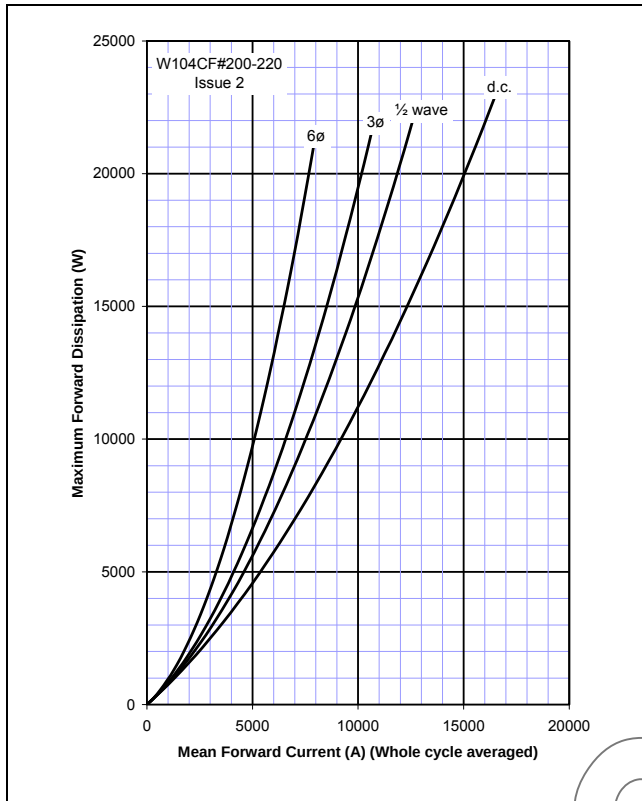


Figure 9 – Forward current vs. Heatsink temperature – Double Side Cooled

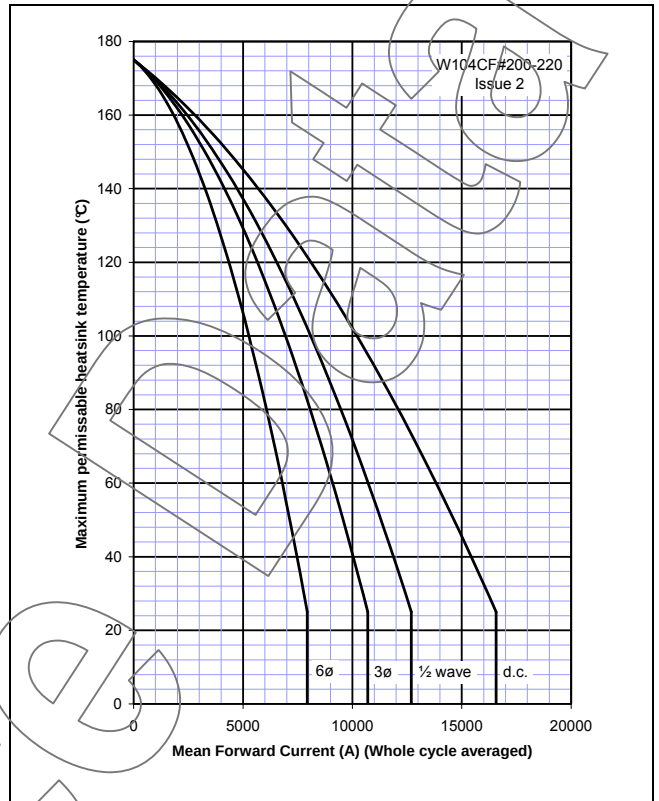


Figure 10 – Forward current vs. Power dissipation – Cathode Side Cooled



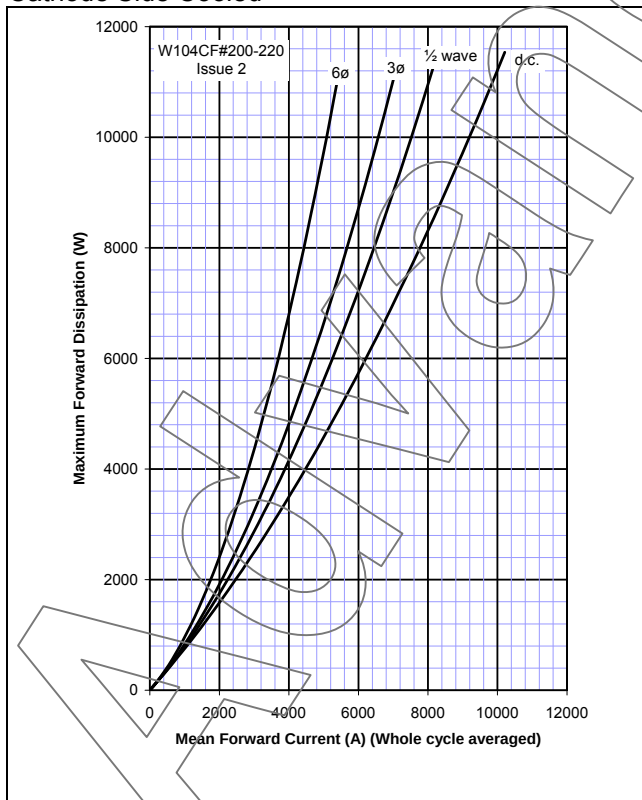


Figure 11 – Forward current vs. Heatsink temperature – Cathode Side Cooled

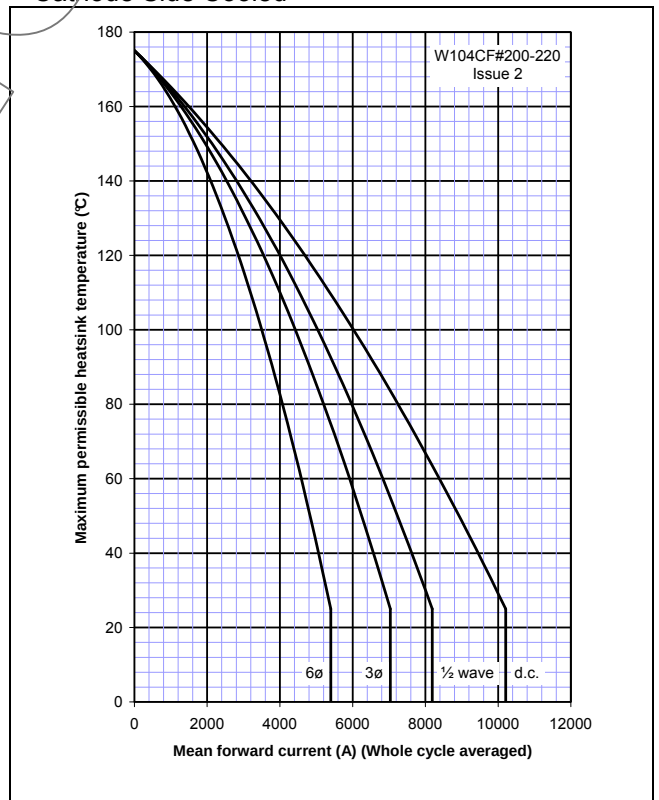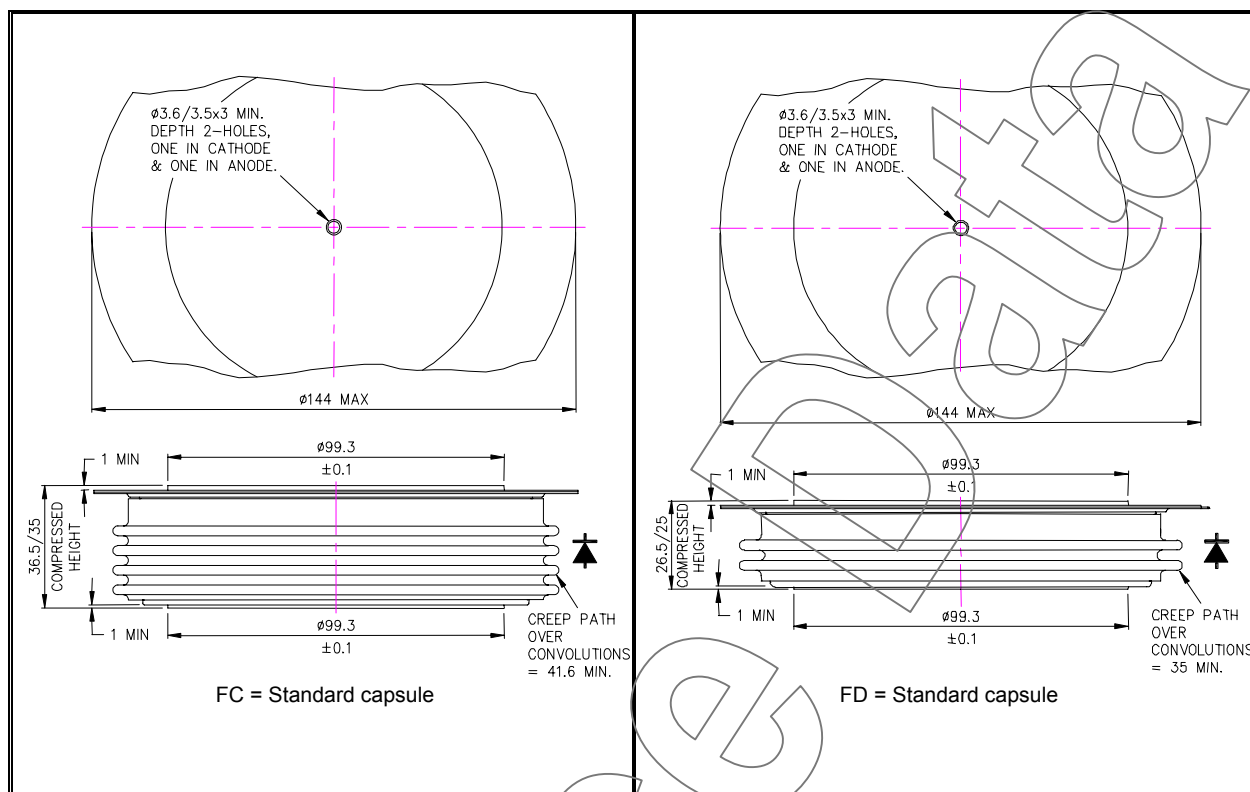

**Outline Drawing & Ordering Information****ORDERING INFORMATION**

(Please quote 10 digit code as below)

| W104C              | F#                                                                       | ◆◆                                     | 0          |
|--------------------|--------------------------------------------------------------------------|----------------------------------------|------------|
| Fixed<br>Type Code | Outline Code<br>FC = Standard 36mm capsule<br>FD = Standard 26mm capsule | Voltage code<br>$V_{RRM}/100$<br>20-22 | Fixed code |

Typical order code: W104CFC220 – 2200V  $V_{RRM}$  36mm clamp height standard capsule.

**IXYS Semiconductor GmbH**  
Edisonstraße 15  
D-68623 Lambertheim

**IXYS Corporation**  
1590 Buckeye Drive  
Milpitas CA 95035-7418  
Tel: +1 (408) 457 9000  
Fax: +1 (408) 496 0670  
E-mail: [sales@ixys.net](mailto:sales@ixys.net)

**WESTCODE**  
An IXYS Company

[www.westcode.com](http://www.westcode.com)[www.ixys.net](http://www.ixys.net)

**Westcode Semiconductors Ltd**  
Langley Park Way, Langley Park,  
Chippenham, Wiltshire. SN15 1GE.

**IXYS Long Beach**  
IXYS Long Beach, Inc  
2500 Mira Mar Ave, Long Beach  
CA 90815  
Tel: +1 (562) 296 6584  
Fax: +1 (562) 296 6585  
E-mail: [service@ixyslongbeach.com](mailto:service@ixyslongbeach.com)

The information contained herein is confidential and is protected by Copyright. The information may not be used or disclosed except with the written permission of and in the manner permitted by the proprietors Westcode Semiconductors Ltd.

© Westcode Semiconductors Ltd.

In the interest of product improvement, Westcode reserves the right to change specifications at any time without prior notice.

Devices with a suffix code (2-letter, 3-letter or letter/digit/letter combination) added to their generic code are not necessarily subject to the conditions and limits contained in this report.