

# GPDR2438

RECTIFIER DIODE

**VOLTAGE UP TO** 1600 V  
**AVERAGE CURRENT** 4380 A  
**SURGE CURRENT** 42 kA

## BLOCKING CHARACTERISTICS

Characteristic		Conditions	Value
V <sub>RRM</sub>	Repetitive peak reverse voltage		1600 V
V <sub>RSM</sub>	Non-repetitive peak reverse voltage		1700 V
I <sub>RRM</sub>	Repetitive peak reverse current, max.	V <sub>RRM</sub> , single phase, half wave, T <sub>j</sub> = T <sub>jmax</sub>	150 mA

## FORWARD CHARACTERISTICS

I <sub>F(AV)</sub>	Average forward current	Sine wave, 180° conduction, T <sub>h</sub> = 55°C	4380 A
I <sub>F(RMS)</sub>	R.M.S. forward current	Sine wave, 180° conduction, T <sub>h</sub> = 55°C	6880 A
I <sub>FSM</sub>	Surge forward current	Non rep. half sine wave, 50 Hz, V <sub>R</sub> = 0 V, T <sub>j</sub> = T <sub>jmax</sub>	42 kA
I <sup>2</sup> t	I <sup>2</sup> t for fusing coordination		8820 kA <sup>2</sup> s
V <sub>F(TO)</sub>	Threshold voltage	T <sub>j</sub> = T <sub>jmax</sub>	0,76 V
r <sub>F</sub>	Forward slope resistance	T <sub>j</sub> = T <sub>jmax</sub>	0,095 mΩ
V <sub>FM</sub>	Peak forward voltage, max	Forward current I <sub>F</sub> = 7800 A, T <sub>j</sub> = 25°C	1,5 V


## SWITCHING CHARACTERISTICS

Q <sub>rr</sub>	Reverse recovery charge, typ	T <sub>j</sub> = T <sub>jmax</sub> , I <sub>F</sub> = 2000 A, di/dt = -5 A/μs	μC
I <sub>rr</sub>	Reverse recovery current	V <sub>R</sub> = 100 V	A
t <sub>rr</sub>	Reverse recovery time		μs
V <sub>FP</sub>	Forward recovery voltage	T <sub>j</sub> = T <sub>jmax</sub> , di/dt = A/μs	V


## THERMAL AND MECHANICAL CHARACTERISTICS

R <sub>th(j-c)</sub>	Thermal resistance (junction to case)	Double side cooled	0,016 °C/W
R <sub>th(c-h)</sub>	Thermal resistance (case to heatsink)	Double side cooled	0,001 °C/W
T <sub>jmax</sub>	Max operating junction temperature		190 °C
T <sub>stg</sub>	Storage temperature		-40 / 190 °C
F	Clamping force ± 10%		30 kN
	Mass		1400 g


Current rating - sine wave

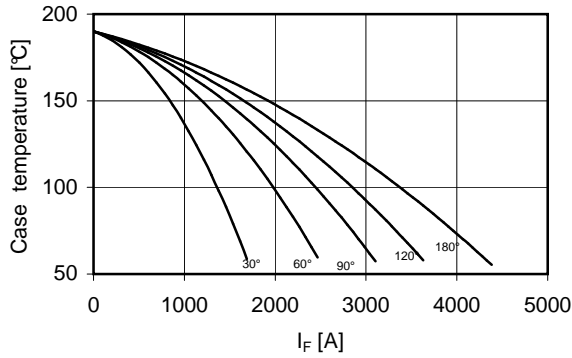


Power loss - sine wave

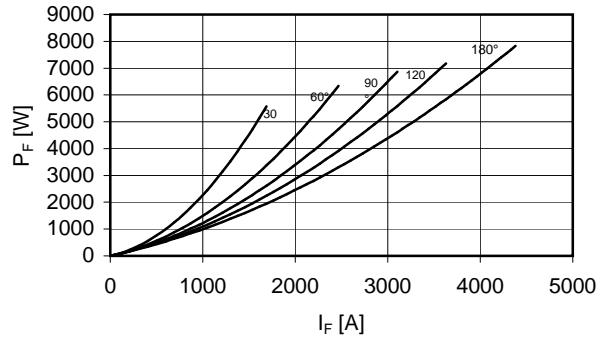



Maximum surge current  
d.s. cooled

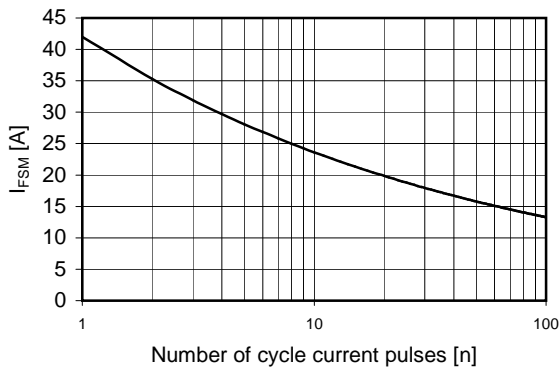

Forward voltage drop

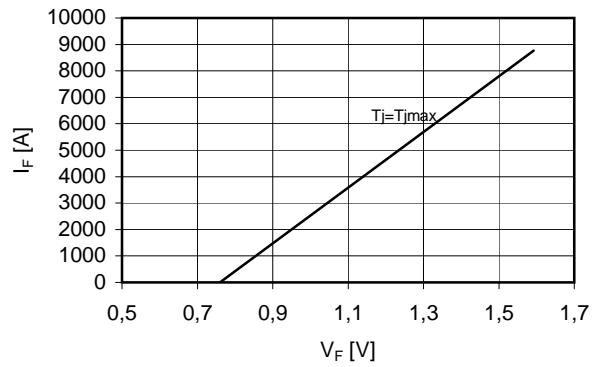

Thermal Impedance (j-c)

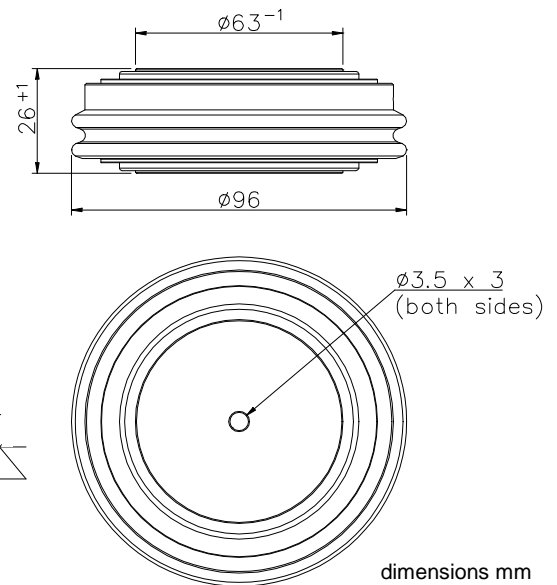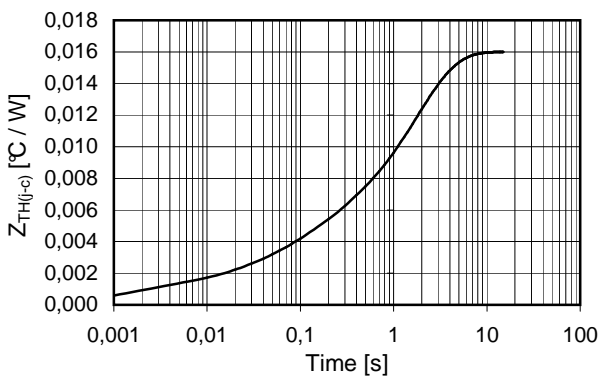

In the interest of product improvement Green Power Solutions reserves the right to change any specification given in this data sheet without notice.