



piconet® stand-alone module for CANopen
4 analog outputs ±10 V
SCOB-04A-0007

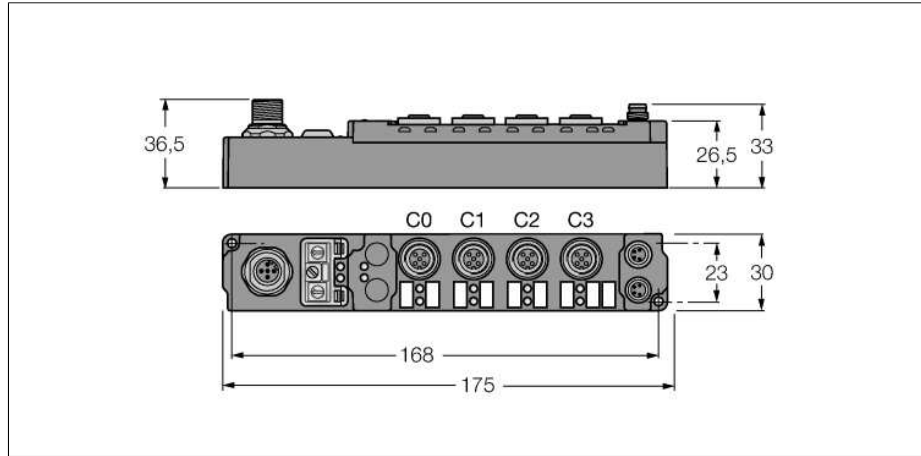


- 4 analogue outputs ±10 V
- Configuration interface
- Parametrizable functions
- Supported via I/O-ASSISTANT 2
- Direct connection to the fieldbus
- Fibre-glass reinforced housing
- Shock and vibration tested
- Encapsulated module electronics
- Metal connector
- Degree of protection IP67


Fieldbus M12 x 1




output M12 x 1



Connection - Outputs

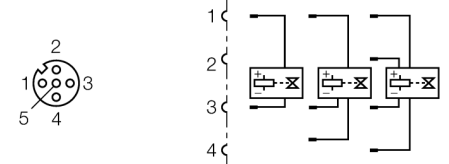

Voltage supply M8 x 1



$I_{Bmax} = I_{Lmax} = 4 A$

Type code	SCOB-04A-0007
Ident no.	6824145
Operating / load voltage	20...29 VDC
Operating current	≤ 40 mA
Fieldbus transmission rate	10 kbps ... 1 Mbps
Fieldbus addressing	0 to 99
Service interface	parameterisation via I/O-ASSISTANT
Electrical isolation	Fieldbus to operational voltage
Number of channels	4 analogue outputs ±- 10 V
Load resistance	> 5000 Ω
Electrical isolation	channels to operational voltage
Conversion time	< 1 ms
Relative measuring error	< +/- 0.3 % of full scale
Actuator power supply	from load voltage
Dimensions (W x L x H)	30x175x26.5mm
Operating temperature	0...+55 °C
Storage temperature	-25 to 85 °C
Vibration test	as per EN 60068-2-6
Shock test	acc. to DIN EN 60068-2-27
Electro-magnetic compatibility	according to EN 61000-6-2/EN 61000-6-4
Protection class	IP67
Approvals	CE, cULus