



**Fieldbus cables for fieldbus systems  
according to IEC61158-2  
CABLE FBY-OG/SD-250M**

- Fieldbus cable, type A, acc.to IEC 61158-2
- PVC jacket, orange
- Oil, gas and sunlight resistant
- For use in the hazardous areas classified as zone 1 and zone 2, group II, acc. to IEC 60079-14
- For indoor and outdoor installation, on racks, on trays and in conduits
- Temperature range -40...+75 °C
- Cable cross section: 18/7 AWG (0.8 mm<sup>2</sup>)
- Cable length: 250 m

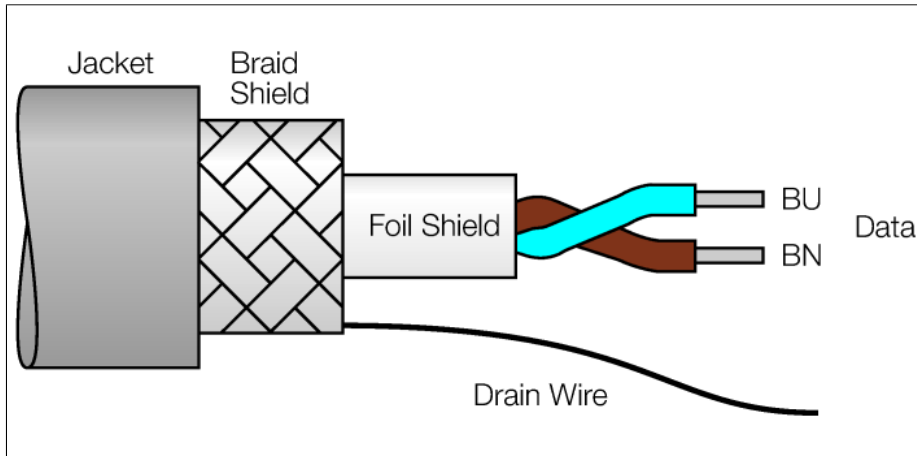

**Conductor cross-section**

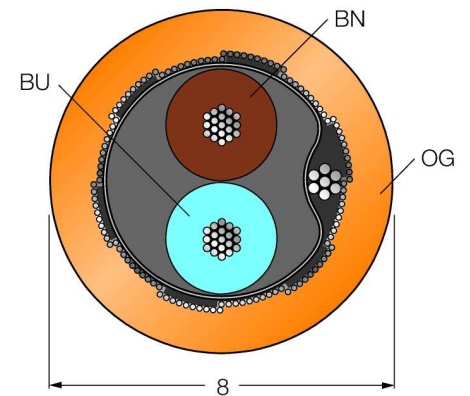

<b>Type code</b>	CABLE FBY-OG/SD-250M
Ident no.	6611106
<b>Cable</b>	18/7 AWG (0.8 mm <sup>2</sup> ), stranded plain copper
Cable length	250m
Cable sheath	PVC, orange
Shield	plastic-covered aluminium foil, metal side outside, makes contact with tinned drain wire and copper braid
Max. tensile strength	≤ 90 N
Bending radius	minimum 5x Cable diameter
Core insulation	PE-foam with PE-casing
Core colors	BN, BU
Core cross-section	2x0.8mm <sup>2</sup>
DC resistance (loop)	43.6 Ω /km
Shield resistance	Nom. 9 Ω /km
Nom. Impedance	100 ± 20 (31.25 kBit/s) Ω
Working capacitance	Nom. 60 nF/km
Capacitive earthing	max. 2 nF/km
Damping	max. 3.0 dB/km (with f = 39 kHz)
skew	max. 1.7 μs/km (7.9 kHz -39 kHz)
Nom. Inductance	0.7 mH/km
<b>Rated voltage [Umax]</b>	300 V
Ambient temperature at rest	-40 ... 75°C
In moving state	-5 ... 50°C
Approvals	UL
UV resistance	gem. UL 1581, section 1200
resistance to oil	according to ICEA S82-552
flame-retardant	IEC 60332-3