

Silicon-Based Technology Corp.

Small-Signal Schottky Barrier Diodes

SBT103M Series

SBT103M series are Schottky Barrier Diodes fabricated by a series of proprietary Schottky barrier patents and technologies (SBT[®]) developed by Silicon-Based Technology Corporation, which exhibit high-performance characteristics for modern switching, conversion and protection applications with high speed and low power consumptions. The package types as described in this data sheet are set forth in routine production; other packages are available upon special orders.

■ Features and Advantages:

- Low forward voltage drop (V_F)
- Low reverse leakage current (I_R)
- Very small conduction power loss
- Very small switching power loss
- Very high switching speed
- Very high reliability

■ Electrical Characteristics : (@ $T_A=25^{\circ}\text{C}$ unless otherwise specified)

Characteristic		Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Reverse Breakdown Voltage	SBT103AM SBT103BM SBT103CM	V_{FM}	40	-	-	V	$I_{RS}=100\mu\text{A}$
			30				
			20				
Maximum Forward Voltage Drop		V_{FM}	-	-	0.35 0.50	V	$I_F=20\text{mA}$ $I_F=200\text{mA}$
Maximum Peak Reverse Current	SBT103AM SBT103BM SBT103CM	I_{RM}	-	-	5.0	μA	$V_R=30\text{V}$ $V_R=20\text{V}$ $V_R=10\text{V}$
Total Capacitance		C_j	-	50	-	pF	$V_R=0\text{V}$, $f=1.0\text{MHz}$
Reverse Recovery Time		t_{rr}	-	10	-	ns	$I_F=I_R=50\text{mA to }200\text{mA}$, $I_{rr}=0.1 \times I_R, R_L=100\Omega$



Silicon-Based Technology Corporation

1F, No. 23, R&D Rd. I, Hsinchu Science Park, Taiwan, R.O.C

Tel : 886-3-5777897

Fax : 886-3-5779832

**■ Maximum Ratings : (@T_A=25°C unless otherwise specified)**


Characteristic	Symbol	SBT103AM	SBT103BM	SBT103CM	Unit
Peak Repetitive Reverse Voltage	V _{RRM}				
Working Peak Reverse Voltage	V _{RWM}	40	30	20	V
DC Blocking Voltage	V _R				
RMS Reverse Voltage	V _{R(RMS)}	28	21	14	V
Forward Continuous Current (Note 1)	I _{FM}	350			mA
Repetitive Peak Forward Current @t≤1.0s	I _{FRM}	1.0			A
Non-Repetitive Peak Forward @t≤1.0s	I _{FSM}	1.5			A
Surge Current @t=10μs		7.5			
Power Dissipation (Note 1)	P _D	400			mW
Thermal Resistance, Junction to Ambient Air (Note 1)	R _{θJA}	250			°C/W
Operating Temperature Range	T _j	-55 to +125			°C
Storage Temperature Range	T _{STG}	-55 to +150			°C

Notes: 1. Part mounted on FR4 PC Board with recommended pad layout, which can be found on our website at <http://www.sbt.com.tw>.

2. Short duration test pulse used to minimize self-heating effect.

■ Package Data :

- Case: Molded Plastic Material (UL Flammability Classification 94V-0)
- Terminals: Solderable Plated Terminals (MIL-STD-202, Method 208)
- Lead Free Plating (Matte Tin Finish)
- Polarity: See device configurations below
- Approx. Weight: 0.05 grams.
- Package outline and dimensions (see below)

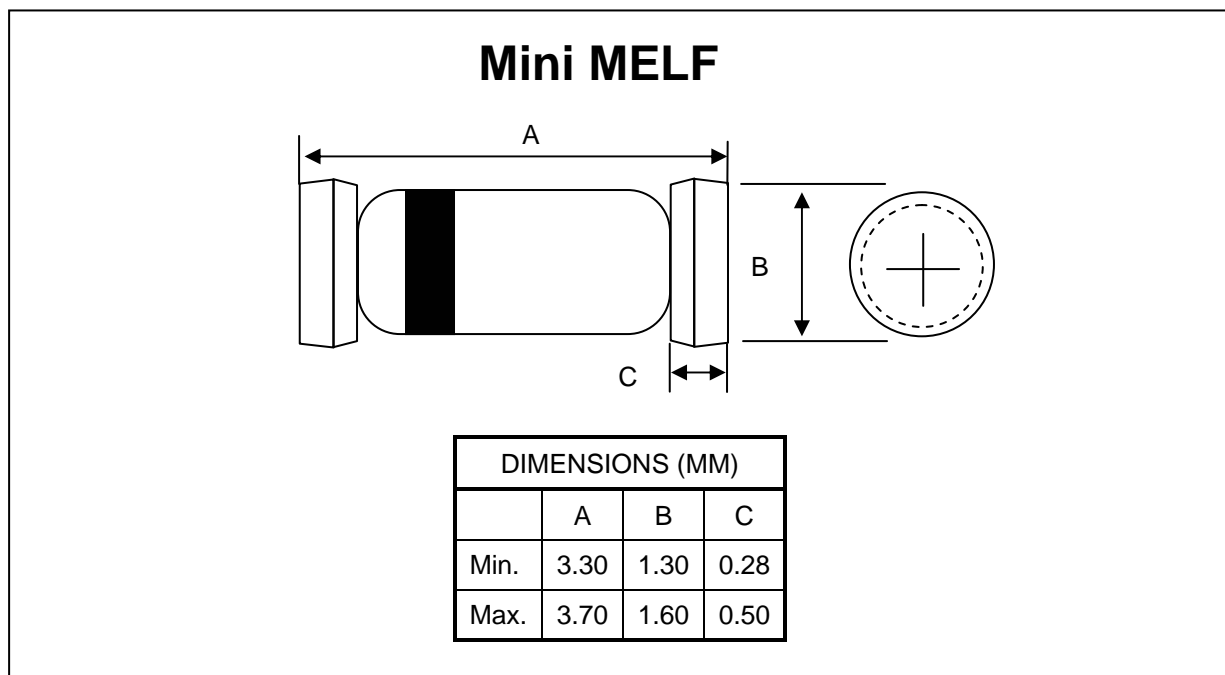

■ **Ordering Information** (Note 3)

Part Number	Marking Code	Packaging Type	Shipping
			7" Tape & Real
SBT103AM	SBTJAL	Mini MELF	3K
SBT103BM	SBTJBL	Mini MELF	3K
SBT103CM	SBTJCL	Mini MELF	3K

Notes: 3. Website at <http://www.sbt.com.tw>

4. Bulk package in a box form is also available upon request.

5. Day code marking is YM, in which Y represents year (For example: 2005 is marked by 5);

M represents month in a year (For example: March is marked by C; November is marked by K).