


CDSV6-99BR-G

Forward Current: 0.15A
Reverse Voltage: 75V
RoHS Device





Features

- Fast switching speed.
- Ultra small surface mount package.
- For general purpose switching applications.
- High conductance.

Marking: KGJ

Diagram:

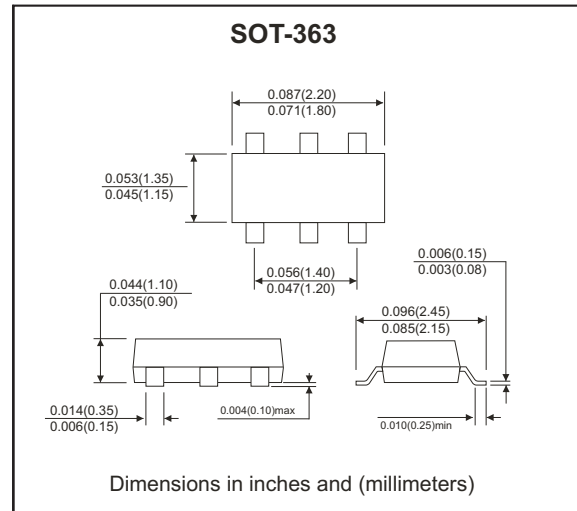

Maximum Ratings (at TA=25°C unless otherwise noted)

Parameter	Symbol	Limits	Unit
Peak repetitive peak reverse voltage Working peak reverse voltage DC blocking voltage	V_{RRM} V_{RWM} V_R	75	V
Forward continuous current	I_{FM}	300	mA
Averaged rectified output current	I_o	150	mA
Non-repetitive peak forward surge current @t=1.0μS @t=1.0S	I_{FSM}	2.0 1.0	A
Power dissipation	P_D	200	mW
Thermal resistance, junction to ambient air	$R_{\theta JA}$	625	°C/W
Operation junction temperature	T_J	150	°C
Storage temperature range	T_{STG}	-65 ~ +150	°C

Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Reverse breakdown voltage	$I_R=2.5\mu A$	$V_{(BR)R}$	75			V
Forward voltage	$I_F=1mA$ $I_F=10mA$ $I_F=50mA$ $I_F=150mA$	V_F			0.715 0.855 1.000 1.250	V
Reverse leakage current	$V_R=75V$ $V_R=20V$	I_R			2.5 0.025	μA
Junction capacitance	$V_R=0V, f=1.0MHz$	C_T			2	pF
Reverse recovery time	$I_F=I_R=10mA, I_{rr}=0.1 \times I_R, R_L=100\Omega$	t_{rr}			4	nS

ELECTRICAL CHARACTERISTIC CURVES (CDSV6-99BR-G)

Fig.1 - Forward Characteristics

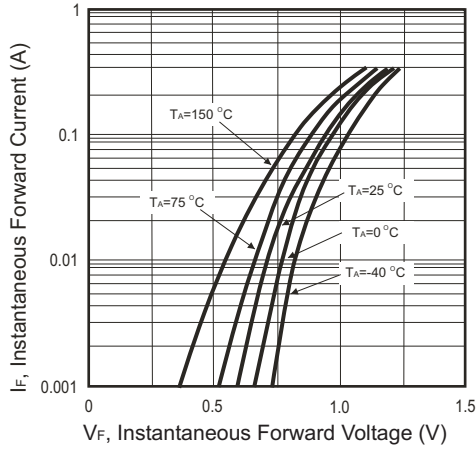


Fig.2 - Reverse Characteristics

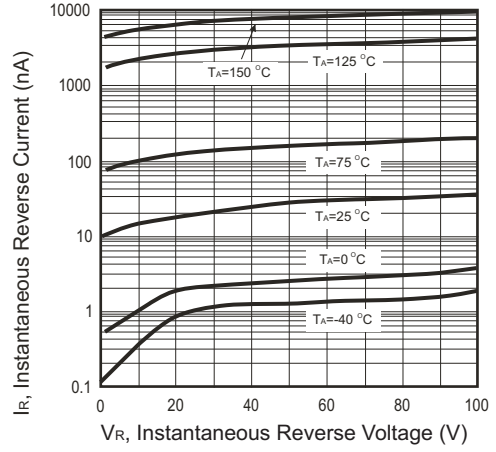


Fig.3 - Capacitance Between Terminals Characteristics

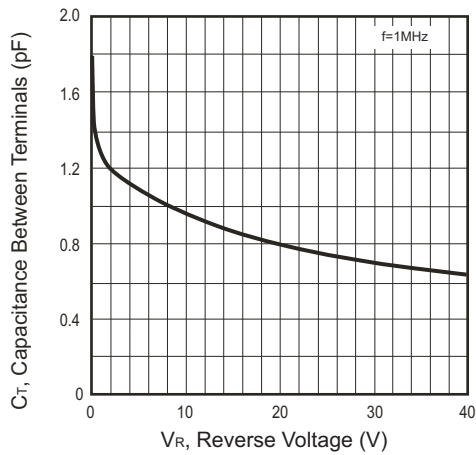


Fig.4 - Power Derating Curve

