

UHL Series Red Laser Line Module

Part No: UHL5-20G-690-**




Product Features

- High Stability and low noise
- Collimated or Adjustable focus beam
- Reverse Polarity Protection
- Custom Options Available

Application

- Measurement
- Bioanalytical
- Automation
- Alignment

Mechanical Drawing

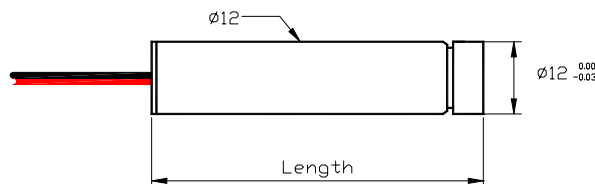

Specification

OPTICAL

Wavelength	690 nm
Optical Output Power	20 mW
Stability	<1%
Wavelength Drift	0.2nm/°C
Noise (20MHz Bandwidth)	<0.5% RMS
Laser Operation	Continuous
Laser Structure	Single Mode Laser
Line Thickness	Adjustable
Minimum Line Thickness	<1mm up to 1 meter
Bore sight Accuracy	<2.5mm/m
Pointing Stability	<50μrad

ELECTRICAL

Operating Voltage ¹	3 to 5 VDC
Operating Current	<120 mA
Control Circuit	Auto Power Control
Electrical Connections	+Red, -Black

MECHANICAL

Dimension	See chart
Cable	200mm
Operating Temperature	-10°C to +50°C
Storage Temperature	-40°C to +80°C
Heat Sink Requirements ²	Recommended

Notes

1. Higher operating voltage version (9 to 12V) is available, the part No. will be: UHL12-20G-690-**.

2. Heat Sink: The UHL Series Red Laser Line Module is designed to operate without heat sink. Do not restrict air circulation around the device; an additional heat sink can be used to maximize the performance and life time of the laser.

Caution: The case is internally connected to the circuit; damage to the anodized surface may result in failure of the laser module.




Operational Hazard-Semiconductor Laser Diode Module: This laser module emits radiation that is visible and harmful to human eye. When in use, do not look directly into the laser emitting aperture. Direct viewing of laser diode emission at close range may cause eye damage.

Limited Warranty: One year. No warranty coverage for disassembly, modifications or damage due to abuse or misapplication.

World Star Tech.


321 Lesmill Rd. Toronto, Ont. M3B 2V1 Canada
Tel: (416) 363-3332 Fax: (416) 363-3112 www.worldstartech.com

Focus Adjustment of Line Generators

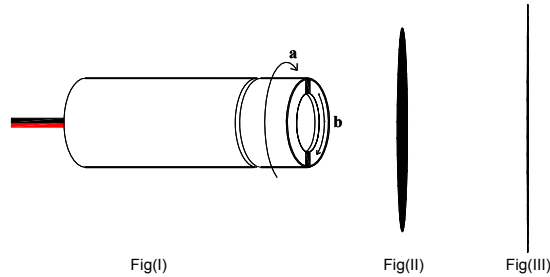

The line generator lens assembly consists of: aspherical lens assembly *a* and cylindrical lens assembly *b*. Lens assembly *a* adjusts the coarse thickness of the line and lens assembly *b* adjusts the fine thickness of the line. To focus the line at a given distance rotate lens assembly *a*, until you get the thinnest possible line. Your line at this point may look the line in Fig (II), thick in the center and thin along the edges. To adjust to a thin line focused line (Fig (III)), keep lens assembly *a* fixed and gently rotate lens assembly *b* (<90°) (making sure not to move lens assembly *a* during this process) until you get a thin uniform line as shown in Fig (III).

Fan Angle Selection Guide

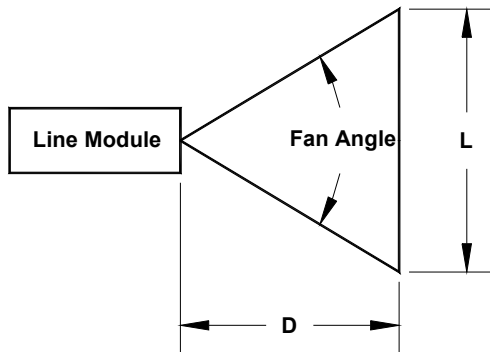

L: Line Length
D: Distance
a: Factor

For given Fan Angle, the Line Length **L** at distance **D** is calculated using the equation :

$$L = a \times D$$

For Example: using 4 ° Fan Angle at distance of 1.5m, the Line Length will be $L = 0.07 \times 1.5m = 0.105m$;

Part No.	Fan angle	Factor a	Line Length(m)			Laser Class	Dimension (Diameter × Length)
			D=0.5m	D=1m	D=3m		
UHL5-20G-690-04	4 °	0.07	0.04	0.07	0.21	IIIb	12mm × 55mm
UHL5-20G-690-15	15°	0.26	0.13	0.26	0.78	IIIa	12mm × 55mm
UHL5-20G-690-30	30 °	0.54	0.27	0.54	1.62	IIIa	12mm × 55mm
UHL5-20G-690-45	45°	0.83	0.42	0.83	2.49	II	12mm × 55mm
UHL5-20G-690-60	60 °	1.15	0.58	1.15	3.45	II	12mm × 55mm
UHL5-20G-690-75	75 °	1.53	0.77	1.53	4.59	II	12mm × 55mm
UHL5-20G-690-90	90°	2.00	1.00	2.00	6.00	II	12mm × 60mm

