




DEPT
1
2
3
4
5
6
7
8
9
10
11
12
NC
JZ

PART NAME: FEMALE TERMINAL


PART NO: 3000HI19/-6

PART NUMBER	MATERIAL	FINISH	Q.C. STAMP
3000HI19A-6	.016 ±.0005 THK. BRASS PRETINNED	SEE MAT'L	YES
3000HI19AB-6	.016 ±.0005 THK. BRASS	NONE	YES

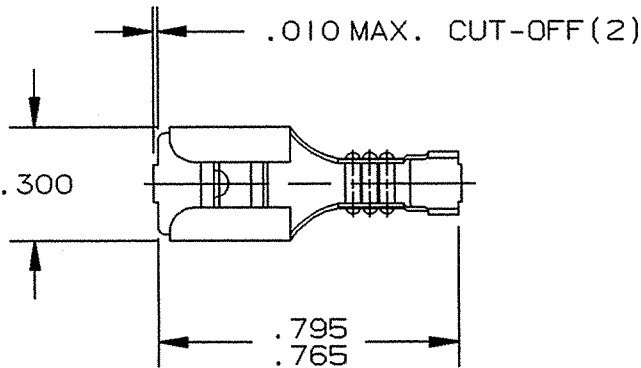


- NOTES:
- 1. TERMINAL WILL ACCEPT STANDARD .250 X .032 MALE TAB.
 - 2. TO ACCEPT #18-#22 GAUGE WIRE.
INSULATION RANGE: .059-.113 DIA.
 - 3. RECOMMENDED STRIP LENGTH: 7/32 ±1/32.
 - 4. FOR LOOSE PIECE PARTS ADD -1 TO PART NUMBER.
 - 5. FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER AS SHOWN.
 - 6. FOR PAPER INTERLEAVING ADD SUFFIX "K" TO PART NUMBER.
(I.E. 3000HI19A-6K).

(P)

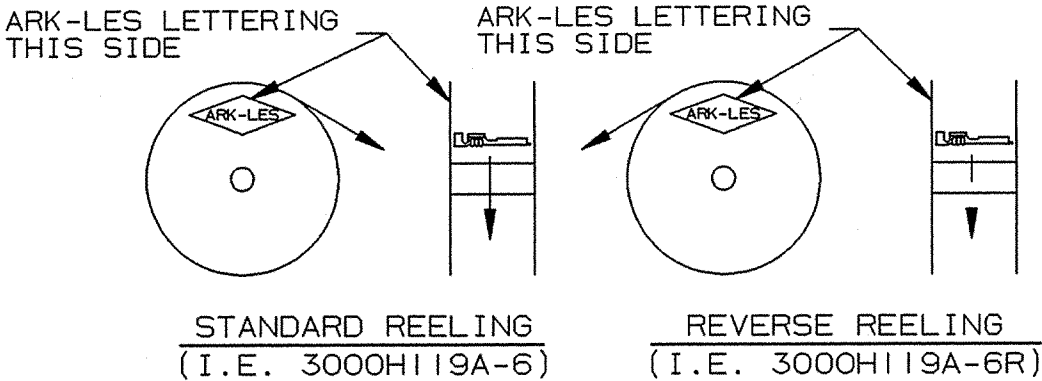

REELING DIAGRAMS

ARK-LES
UNCONTROLLED

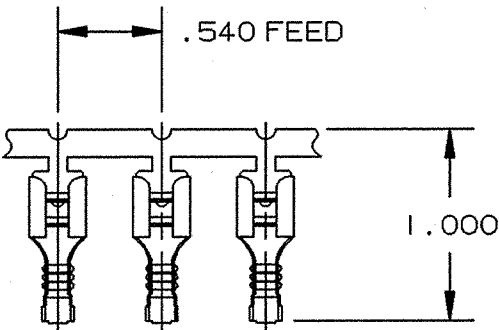

FABRICATED TERMINAL STRIP

SCALE: FULL

				PROD. REL.	94143	10/1/73	PC	TOLERANCES UNLESS OTHERWISE SPECIFIED:		
				QUOTE REL.				DECIMALS ±.010	METRIC ±0.25mm	ANGLES ±1°
				DR:	R. TASTULA	1/15/01		MATERIAL: SEE TABLE		
				CHK'D:	R.W.T.	1-19-01		FINISH: SEE TABLE		
				APP:	BISHOP	3-29-01		PART NO: 3000HI19/-6		
P	REVISED PER ECR #12128		1/15/01	RT	SUPERCEDES DWG. DATED: 5/11/92					
REV.	DESCRIPTION		DATE	DR.	SCALE: 2:1	CAD NO: BT00026				

ORIGINAL IF RED