



PART NAME:

TERMINAL, FEMALE

PART NO:


3500H403/

PART NUMBER	MATERIAL	FINISH
3500H403A	.014 ±.0005 THK. BRASS PRETINNED	SEE MAT'L
3500H403AB	.014 ±.0005 THK. BRASS	NONE

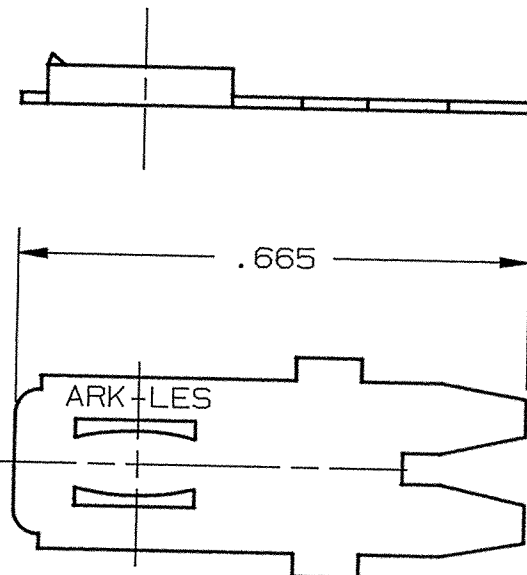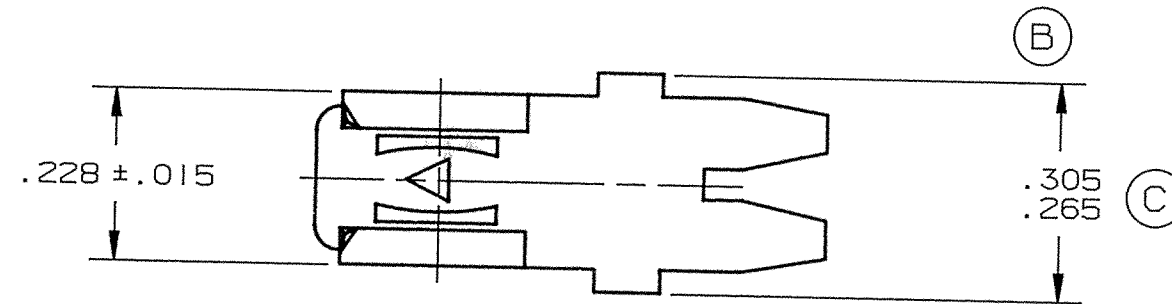


NOTES:

1. TO ACCEPT .187 X .020 MALE TAB.
2. FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER. (I.E. 3500H403AR)
3. FOR TERMINALS LOOSE PIECE ADD SUFFIX "-1" TO PART NUMBER. (I.E. 3500H403A-1)
4. INSERTION/WITHDRAWAL REQUIREMENTS:
1ST IN: 5 LBS. MIN. - 9 LBS MAX.
6TH OUT: 4 LBS. MIN.

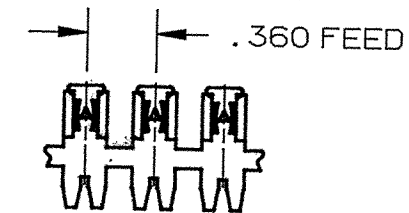


ARK-LES LETTERING
THIS SIDE

ARK-LES LETTERING
THIS SIDE



STANDARD REELING
(I.E. 3500H403A)

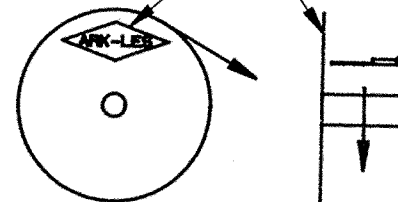

REVERSE REELING
(I.E. 3500H403AR)

REELING DIAGRAMS

ARK-LES
UNCONTROLLED

FABRICATED TERMINAL STRIP

SCALE: FULL

REV.	DESCRIPTION	DATE	DR.	SCALE: 4:1	CAD NO: BTU0020	PART NO: 3500H403/
C	REVISED PER ECR #10771	12/29/95	RT	PROD. REL. JM 6561 8/6/93	RT	TOLERANCES UNLESS OTHERWISE SPECIFIED: DECIMALS ±.010 METRIC ±0.25mm ANGLES ±1°
B	.040/.020 WAS .010 MAX. PER ECR #9812	9/30/93	BJC	QUOTE REL.		MATERIAL: SEE TABLE
A	PROD. REL. PER ECR #9708	8/5/93	BJC	DR: B J CARUTHERS 8/6/93		FINISH: SEE TABLE
				CHK'D: R.W.T. 1-3-96		
				APP: COR 1-19-96		
				SUPERCEDES DWG. DATED:		