

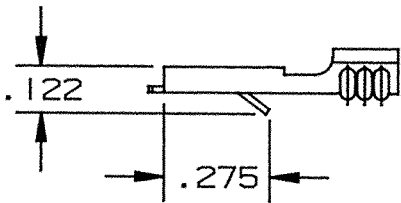


DEPT	
1	1
2	
3	
4	1
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	



PART NAME: TERMINAL, FEMALE LOCK-IN

PART NO: 3000H118/-6-2

PART NUMBER	MATERIAL	FINISH	Q.C. STAMP
3000H118A-6-2	.016 ±.0005 THK. BRASS PRETINNED	SEE MAT'L	YES
3000H118AB-6-2	.016 ±.0005 THK. BRASS	NONE	YES

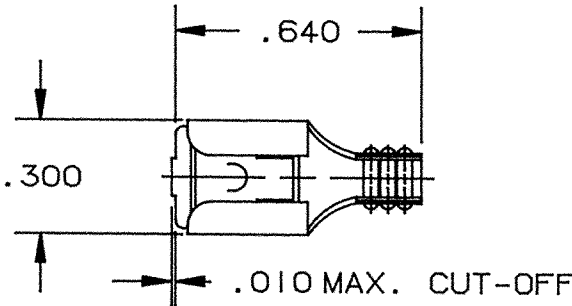

- NOTES:
- 1. TERMINAL WILL ACCEPT STANDARD .250 X .032 MALE TAB.
 - 2. TO ACCEPT #18-#24 GAUGE WIRE. ON 3000H118/-6-2 U.L. RECOGNIZED #18-#22 GAUGE WIRE.
 - 3. RECOMMENDED STRIP LENGTH: 7/32 ±1/32.
 - 4. FOR LOOSE PIECE PARTS ADD -1 TO PART NUMBER.
 - 5. FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER AS SHOWN.

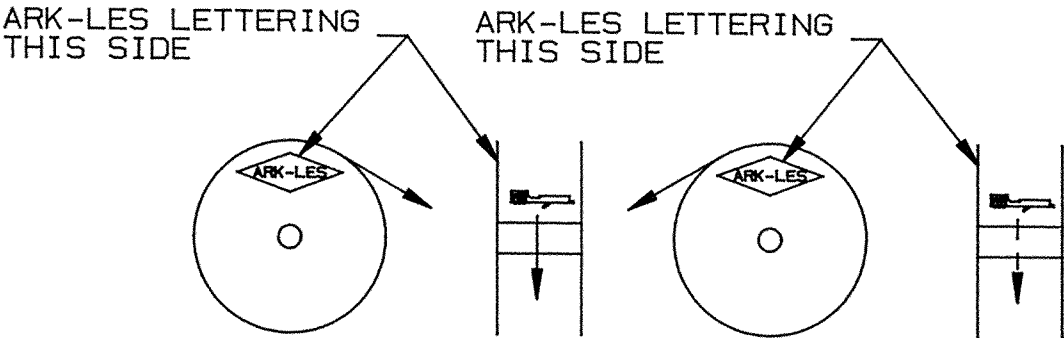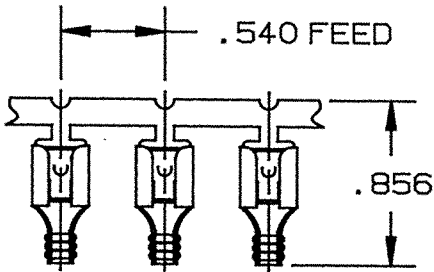

STANDARD REELING (I.E. 3000H118A-6-2) REVERSE REELING (I.E. 3000H118A-6-2R)

REELING DIAGRAMS

FABRICATED TERMINAL STRIP

SCALE: FULL

ARK-LES
UNCONTROLLED

				PROD. REL.	PER JB	8-2-77	A.D.	TOLERANCES UNLESS OTHERWISE SPECIFIED:
				QUOTE REL.				DECIMALS ±.010 METRIC ±0.25mm ANGLES ±1°
				DR:	M. BUMILA	5-5-92		MATERIAL: SEE TABLE
				CHK'D:	R.W.T.	5-7-92		FINISH: SEE TABLE
				APP:	Bishop	5-15-92		PART NO: 3000H118/-6-2
E	REDRAWN WITHOUT CHANGE PER ECR #9038	5-5-92	M.B.	SUPERCEDES DWG. DATED:	10-4-85			
REV.	DESCRIPTION	DATE	DR.	SCALE: 2X	CAD NO: BT00021			

ORIGINAL IF RED