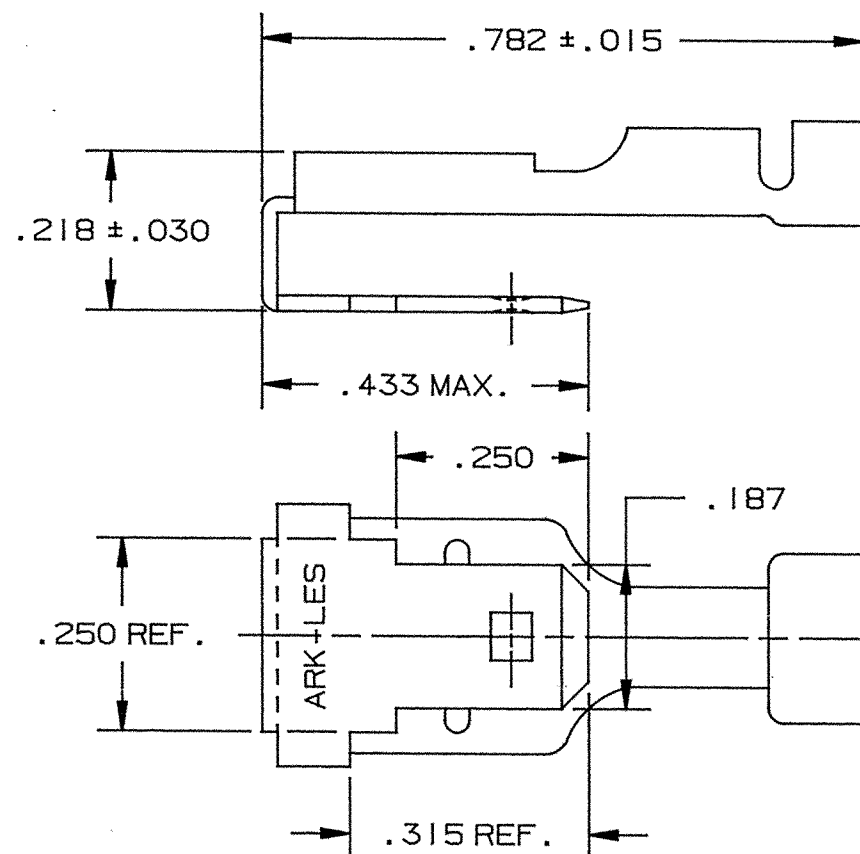
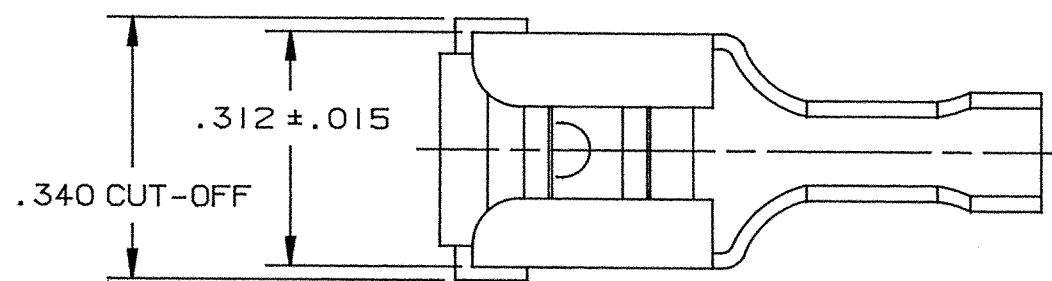

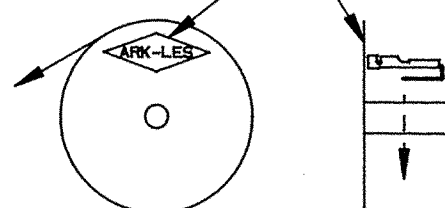


DEPT
1
2
3
4
5
6
7
8
9
10
11
12
NC
JZ


PART NAME: TERMINAL, MALE & FEMALE

PART NO: 3800H72A/-6

ARK-LES LETTERING
THIS SIDEARK-LES LETTERING
THIS SIDESTANDARD REELING
(I.E. 3800H72A-6)REVERSE REELING
(I.E. 3800H72A-6R)REELING DIAGRAMS

NOTES:

1. TO MATE WITH .250 X .032 MALE TAB AND STANDARD .187 X .020 FEMALE RECEPTACLE.
2. TO ACCOMMODATE #18-#22 GAUGE WIRE.
3. RECOMMENDED STRIP LENGTH: 7/32 ± 1/32.
4. INSULATION RANGE: .040 - .090 DIA.
5. FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER (I.E. 3800H72A-6R).
6. FOR TERMINALS LOOSE PIECE ADD SUFFIX "-1" TO PART NUMBER (I.E. 3800H72A-6-1).

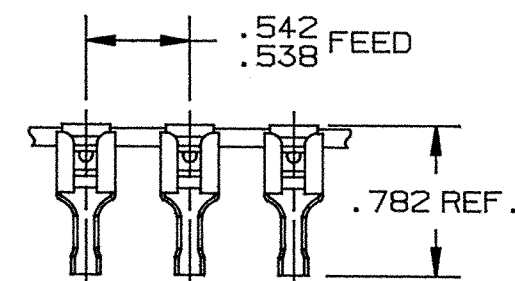FABRICATED TERMINAL STRIP

SCALE: FULL

ARK-LES
UNCONTROLLED

				PROD. REL.	JM3245	6-14-93	R.T.	TOLERANCES UNLESS OTHERWISE SPECIFIED:	
				QUOTE REL.				DECIMALS ±.010	METRIC ±0.25mm
				DR:	M. BUMILA	5-27-93		MATERIAL: SEE TABLE	
				CHK'D:	R.W.T.	6-4-93		FINISH: SEE TABLE	
				APP:	Bishop	6-14-93		PART NO: 3800H72A/-6	
A	PROD. REL. PER ECR #9667	5-27-93	M.B.	SUPERCEDES DWG. DATED:					
REV.	DESCRIPTION	DATE	DR.	SCALE: 4X	CAD NO: BVE0012				

ORIGINAL IF RED