

DEPT	
1	
2	
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	
DW	


PART NAME:

TERMINAL, 1/4" PIGGYBACK


PART NO:

3000H221J/-5

PART NUMBER	MATERIAL	FINISH
3000H221J-5	.016±.001 THK C.R.STEEL	PRE-NICKEL
3000H221JB-5		NONE

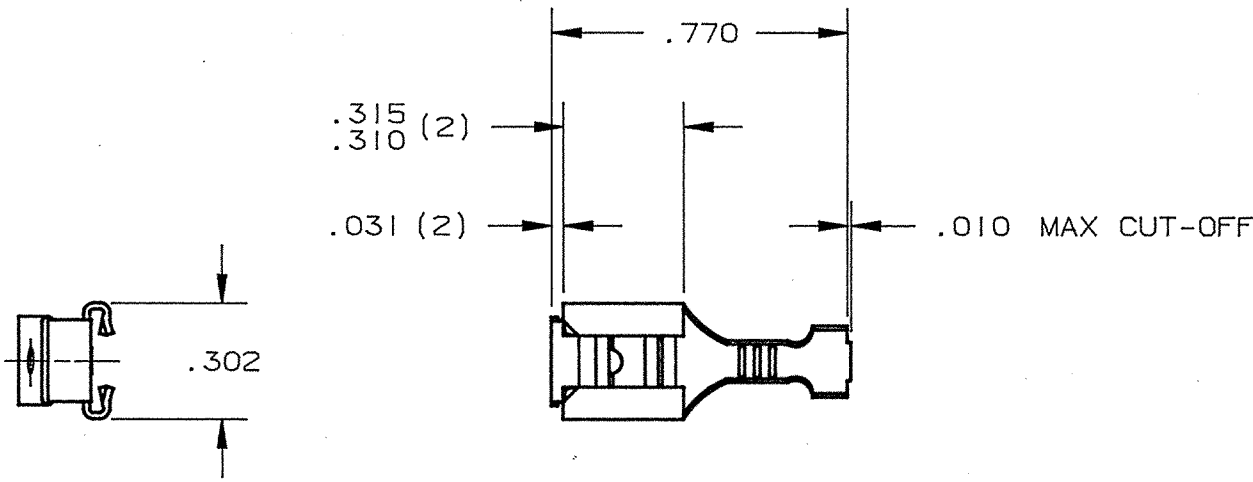



- NOTES:
1. TO MATE WITH .250 x .032 MALE TAB AND .250 x .032 FEMALE RECEPTACLE.
 2. TO ACCOMMODATE #14-#18 AWG.
 3. INSULATION DIAMETER RANGE: .110-.140 DIA.
 4. RECOMMENDED STRIP LENGTH: 9/32 ± 1/32.
 5. INSERTION/WITHDRAWAL FORCES TO BE AS FOLLOWS WHEN USING STEEL TEST TAB 3000M307.
1ST INSERTION: 13 LBS MAX.
6TH WITHDRAWAL: 5 LBS MIN.

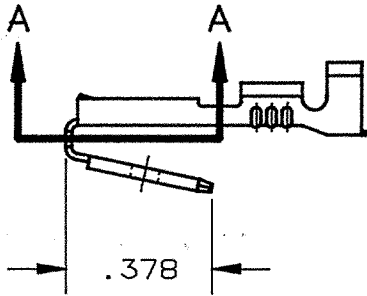


WIRE GRIP



INSULATION GRIP




SECTION A-A

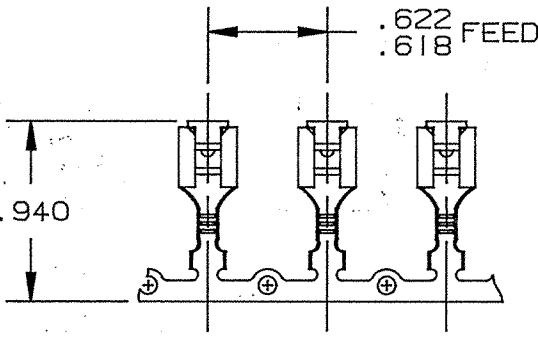

FABRICATED TERMINAL STRIP

SCALE 1:1

ARK-LES LETTERING THIS SIDE

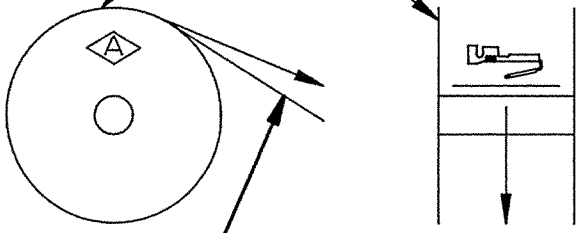

WINDING DIAGRAM

PAPER INTERLEAVING

ARK-LES
UNCONTROLLED

				PROD. REL.				TOLERANCES UNLESS OTHERWISE SPECIFIED:		
				QUOTE REL.				DECIMALS ±.010	METRIC ±0.25mm	ANGLES ±1°
				DR:	C. O'REILLY	1/10/97		MATERIAL: SEE TABLE		
				CHK'D:				FINISH: SEE TABLE		
				APP:				PART NO: 3000H221J/-5		
				SUPERCEDES DWG. DATED:						
REV.		DESCRIPTION	DATE	DR.	SCALE: 2:1	CAD NO:				

ORIGINAL