

# SMD Oscillators- Differential Output 7.0 x 5.0 x 1.3 mm BE Series

Oscillators  
Series

## Features

- Fundamental solution.
- 3.3V and 2.5V operation available.
- LVDS output, output frequencies 25 MHz to 200 MHz.
- Excellent low phase noise and jitter.
- Tri-State function available.
- Applications : Fibre Channel, Gigabit Ethernet, Serial ATA, Serial Attached SCSI, PCI-Express, SDH / SONET.
- RoHS Compliant / Pb Free.




## Electrical Specifications

Item / Type	BE
Output Type	LVDS
Output Load	100 $\Omega$
Oscillation Mode	Fundamental
Supply Voltage	2.5 V , 3.3 V
Frequency Range	25 ~ 200 MHz
Overall Frequency Stability *	$\pm 50$ ppm
Operating Temperature Range	- 40 ~ + 85 $^{\circ}\text{C}$
Storage Temperature Range	- 55 ~ + 125 $^{\circ}\text{C}$
Voltage Vol ( Min. ) / Voh ( Max. )	0.9 V / 1.6 V
Rise ( Tr ) / Fall ( Tf ) Time ( 20 % ~ 80 % )	1 ns Max.
Supply Current	80 mA Max.
Symmetry	45 ~ 55 %
Start-up Time	10 ms Max.
Phase Jitter ( 12 KHz ~ 20 MHz )	1 ps Max.


\* Inclusive of frequency tolerance at 25  $^{\circ}\text{C}$ , variation over temperature, supply voltage variation, aging and vibration.

## Dimensions

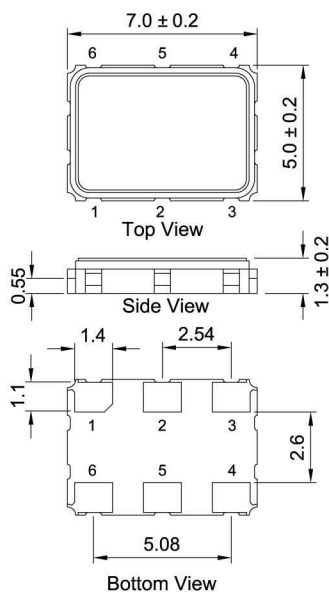

PAD FUNCTION:  
1: ENABLE CONTROL  
2: NC  
3: GND  
4: OUT  
5: ~OUT  
6: VDD

\* :Power Supply Decoupling Capacitor is Required.



Units: mm

Remark : Specification subject to change without prior notice. Please confirm with our sales.