



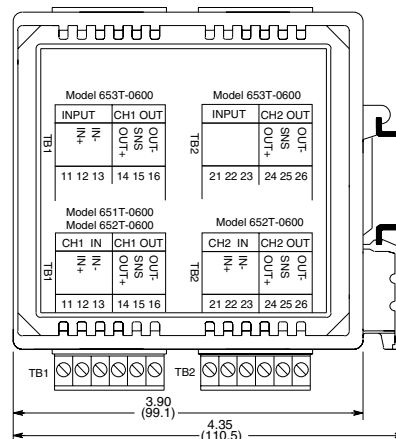

# Isolated Transmitters: 600T Series

## 651T, 652T, 653T Multi-Channel, Two-Wire Isolators

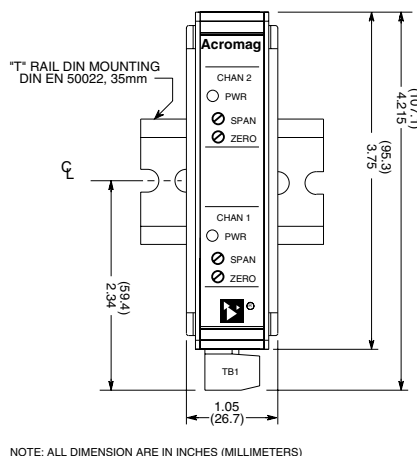

NOTE: ALL DIMENSIONS ARE IN INCHES (MILLIMETERS)

DC current input ♦ Single/dual-channel DC-powered isolators ♦ Signal splitter

### Description

#### Models

651T: Single I/O channel

652T: Dual I/O channel

653T: Single input, dual output (splitter)

These units receive 4-20mA process current inputs and provide isolated 4-20mA output signals. Each channel operates independently and is isolated from the others to prevent interaction between channels.

For easy troubleshooting, each unit has LEDs and diagnostic test points. Power LEDs help identify output open loop conditions. The precision 10 ohm sense resistor enables monitoring of the output signal without disturbing field wiring.

#### Input / Output Ranges

4 to 20mA DC input

4 to 20mA DC output

#### Power Requirement

12 to 36V DC (loop-powered)

Two-wire transmitter

### Approvals


CE marked. UL, cUL listed

Class I, Division 2, Groups A, B, C, D.

### Key Features & Benefits


- Two channels in a single unit saves space and reduces costs.
- Signal splitter model (653T) provides two identical outputs from one input signal.
- Galvanic isolation eliminates ground loops, reduces noise, and blocks transient signals.
- Independent channels prevent signal interaction and offer spares for later use.
- Power LEDs provide a visual indication of operational process loops.
- Excellent accuracy and stability ensure reliable

### 650T Series Isolation Diagram

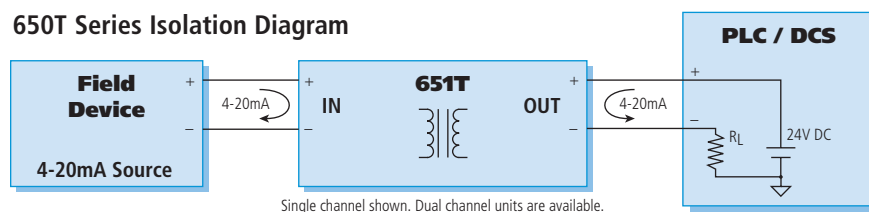

Note: 650T series transmitters are for two-wire transmitter interfaces (sinks current). For application notes using 650T Transmitters, refer to Page 16.

### 670T Series Isolation Diagram

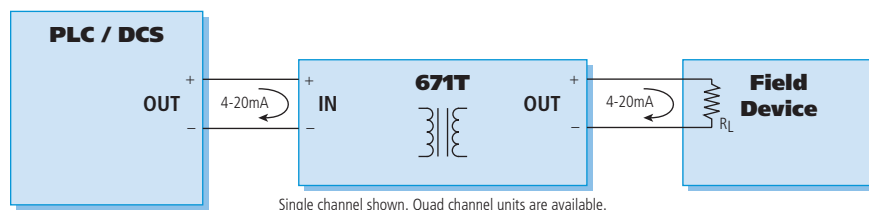

Note: 670T series transmitters are for output resistive loads only (sources current). For more information on the 670T Transmitter, refer to Page 14. Application notes are on Page 16.

**Acromag**   
THE LEADER IN INDUSTRIAL I/O

Tel: 248-295-0880 ■ Fax: 248-624-9234 ■ sales@acromag.com ■ www.acromag.com ■ 30765 S Wixom Rd, Wixom, MI 48393 USA

# Isolated Transmitters: 600T Series



## Performance Specifications

### Reference Test Conditions

Input/Output current: 4 to 20mA; output load 500 ohms; 77°F (25°C).

### Input range

4 to 20mA input (each channel).

### Input burden

Voltage drop (651T, 652T): Less than 1.5V, typical (75 ohm equivalent).

Voltage drop (653T): Less than 3.0V, typical (150 ohm equivalent).

### Output range

4-20mA DC output (each channel).

$RI = (P_{supply} - 12V) / 0.02$

### Output compliance

$P_{supply} = 12V + (0.02 \times R_{load})$

### Output limiting

Outputs are limited to 36mA.

### Output ripple

Less than  $\pm 0.1\%$  of the maximum output span.

### Accuracy

$\pm 0.1\%$  of output span. Error includes the combined effects of isolator repeatability, hysteresis, terminal point linearity and adjustment resolution.

### Ambient temperature effect

Less than  $\pm 0.006\%$  of input span per °F ( $\pm 0.01\%$  per °C) over the ambient temperature range for reference test conditions. This specification includes the combined effects of zero and span over temperature.

### Calibration

Two 15-turn potentiometers (zero and span) per channel, accessible from front of the unit.

### Bandwidth

-3dB at 45Hz, typical.

### Response time

For a step input, the output reaches 98% of output span in 15mS, typical.

### Noise rejection

Common mode: 100dB at 60Hz, typical.

Normal mode: -5dB at 60Hz, 100 ohm source, typical.

### Diagnostics

LED power indicator: Off for output open loop detection, power, or load compliance problem.

Field test points: An internal 10 ohm sense resistor provides test points for monitoring the output signal current during field maintenance.

## ◆ Environmental

### Ambient Temperature

Operating: -25 to 70°C (-13 to 158°F).

Storage: -40 to 85°C (-40 to 185°F).

### Relative Humidity

5 to 95%.

### Power Requirement

12 to 50V DC for each output channel.

### Isolation

Inputs, outputs, and individual channels are isolated from each other for common-mode voltages up to 250V AC, or 354V DC off ground, on a continuous basis (will withstand 1500V AC dielectric strength test for one minute without breakdown).

### Radiated Field Immunity (RFI)

Complies with EN61000-4-3 Level 3 (10V/m, 30 to 1000MHz) and European Norm EN50082-1.

### Electromagnetic Field Immunity (EMI)

Less than  $\pm 0.25\%$  of output span effect under the influence of electromagnetic fields from switching solenoids, commutator motors, and drill motors.

### Surge Immunity

Complies with EN61000-4-5 Level 3 (2KV) and European Norm EN50082-1.

### Electrical Fast Transient (EFT)

Complies with EN61000-4-4 Level 3 (2KV) and European Norm EN50082-1.

### Electrostatic Discharge (ESD)

Complies with EN61000-4-2 Level 3 (8KV air, 4KV direct to the enclosure port) and European Norm EN50082-1.

### Radiated Emissions

Meets or exceeds European Norm EN50081-1 for Class B equipment.

### Approvals

CE marked, UL & cUL listed.

Hazardous Locations: Class I: Div. 2; Groups A, B, C, D

## ◆ Physical

### Enclosure

Case: Self-extinguishing NYLON type 6.6 polyamide thermoplastic UL94 V-2 NEMA Type 1 enclosure.

### Connectors (Removable Terminal Blocks)

Wire Range: AWG #14-22 (AWG #12 stranded only).

### Printed Circuit Boards

Military grade FR-4 epoxy glass circuit board.

### Dimensions

1.05W x 4.68H x 4.35D inches.

26.7W x 95.3H x 110.5D millimeters.

### Shipping Weight

1 pound (0.45 Kg) packed.

## Ordering Information

### ◆ Models

#### 651T-0600

Single channel 2-wire transmitter

#### 652T-0600

Dual channel 2-wire transmitter

#### 653T-0600

Single input with dual isolated output transmitter

### ◆ Accessories (see Page 21)

#### PS5R-SD24

Power supply (24V DC, 2.5A).

#### TBK-B01

Optional terminal block kit, barrier strip style, 2 pcs.

#### TBK-S01

Optional terminal block kit, spring clamp style, 2 pcs.

#### DIN RAIL 3.0

#### DIN RAIL 16.7

DIN rail strip, Type T, 3 inches (75mm) or 16.7 inches (425mm)

#### 20RM-16-DIN

19" rack-mount kit with DIN rail.

Holds sixteen 650T transmitters.



Optional terminal blocks: barrier strip (left) and spring clamp (right). Cage clamp terminal is standard.

**Acromag**   
THE LEADER IN INDUSTRIAL I/O

# Isolated Transmitters: 600T Series



## Accessories

### ◆ Terminal Blocks





#### Barrier Strip Terminal Blocks\*

#### Spring Clamp Terminal Blocks\*

### Ordering Information

\* I/O modules ship with cage clamp terminal blocks. Terminal block kits are for replacement purposes. See I/O module information for compatibility

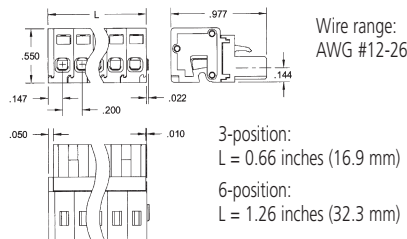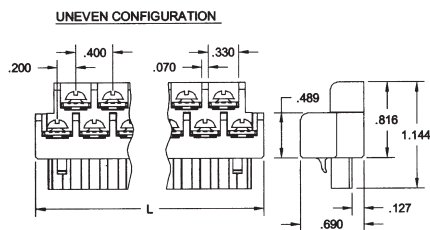

#### Barrier Strip

TBK-B01  
Terminal block kit,  
two 6-position pieces

TBK-B02  
Terminal block kit, four  
6-position pieces

TBK-B03  
Terminal block kit, one  
3-position and three  
6-position pieces

#### Spring Clamp

TBK-S01  
Terminal block kit,  
two 6-position pieces

TBK-S02  
Terminal block kit,  
four 6-position pieces


TBK-S03  
Terminal block kit,  
one 3-position and  
three 6-position pieces

### ◆ Mounting Hardware



#### Din-Rail Mounting

For your convenience, Acromag offers several mounting accessories to simplify your system installation. Our 19" rack-mount kit provides a clean solution for mounting your I/O modules and a power supply. Or you can buy precut DIN rail strips for mounting on any flat surface.

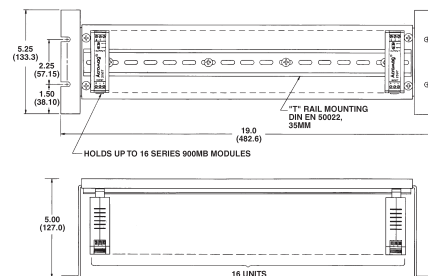


### Ordering Information

20RM-16-DIN  
19" rack-mount kit with DIN rail.

DIN RAIL 3.0  
DIN RAIL 16.7  
DIN rail strip, Type T, 3 inches (75mm) or  
16.7 inches (425mm)

### ◆ AC Current Sensor



This external sensor measures a 0-20A AC signal and provides a DC mA output for an Ethernet input module. It enables remote mounting of the I/O module for safe monitoring of the AC signal.

### Ordering Information

5020-350  
AC current sensor

### ◆ Power Supplies



#### 60W Universal Slimline Power Supply

Input Power Requirement  
85 to 264V AC or 100 to 370V DC

Output  
24V DC, 2.5A (60W)

### Ordering Information

PS5R-SD24  
Universal 60W power supply

Visit [www.acromag.com](http://www.acromag.com) for additional models and more information.

### ◆ Cables

#### STRAIGHT CAT5 CABLE



CONNECTS 900EN-S005 SWITCH  
TO 9XXEN ETHERNET I/O MODULE

### Ordering Information

5035-355  
Ethernet straight cable, CAT5, 3 feet long, shielded

5035-360  
Ethernet crossover cable, CAT5E, 5 feet long, shielded

**Acromag**   
THE LEADER IN INDUSTRIAL I/O