

Coaxial

Wideband Amplifier

ZX60-V81+

50Ω 20 to 6000 MHz

The Big Deal

- Ultra wideband
- High dynamic range:
 - +18.5dBm P1dB compression
 - +35dBm Output IP3



CASE STYLE: GC957

Product Overview

The ZX60-V81+ (RoHS compliant) is a very compact wideband amplifier covering 20 to 6000MHz with 10dB gain (at 2GHz). Housed in a rugged, cost effective unibody chassis, this amplifier supports a wide variety of applications requiring moderate power output, low distortion and 50 ohm matched input/output ports.

Key Features

Feature	Advantages
Ultra Wide band high dynamic range	The ZX60-V81+ covers a wide spectrum of application frequencies from VHF through 'C' band. When combined with the output power and IP3, this amplifier supports a broad array of systems and test applications.
Well Matched input / output ports	With typical input VSWR of 1.2:1 and output VSWR of 1.25:1 at 2GHz, the ZX60-V81+ can be used in cascade with many components and maintain minimal interaction or reflections.
Very small size, 0.75" x 0.75"	The unique unibody construction enables the ZX60-V81+ to be used in compact designs.
Unconditionally stable	No adverse effects due to loading of the input and output ports.



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Coaxial Wideband Amplifier

ZX60-V81+

50Ω 20 to 6000 MHz

Features

- Wideband, 20 to 6000 MHz
- Output power at 1dB compression, +18.5 dBm typ.
- Good output IP3, 35 dBm typ.
- Good VSWR
- Unconditionally stable
- Protected by US patents 6,790,049 & 6,943,629

Applications

- Base station infrastructure
- CATV & DBS
- MMDS & wireless LAN
- LTE
- Buffer amplifier
- PCS
- Test equipment



Case Style: GC957

Connectors	Model	Price	Qty.
SMA	ZX60-V81-S+	\$69.95 ea.	(1-9)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications at 25°C

Parameter	Condition (MHz)	Min.	Typ.	Max.	Units
Frequency Range		20		6000	MHz
Gain	100	9.5	10.5	11.5	dB
	1000		10.2		
	2000	8.5	9.7	11.0	
	3000		9.0		
	4000	7.3	8.5	10.0	
	6000		7.0		
Output Power at 1dB compression	100	17.0	18.5		dBm
	1000	17.0	18.5		
	2000	17.0	18.5		
	3000		19.0		
	4000		18.5		
	6000		16.5		
Noise Figure	100		7.5	9.0	dB
	1000		8.0		
	2000		8.0	9.5	
	3000		8.0		
	4000		8.0		
	6000		9.0		
Output third order intercept point	100		39.5		dBm
	1000		37.0		
	2000	32	36.0		
	3000		35.0		
	4000		34.0		
	6000		31.0		
Input VSWR	100		1.10		:1
	1000		1.10		
	2000		1.20	1.5	
	3000		1.20		
	4000		1.20		
	6000		1.70		
Output VSWR	100		1.10		:1
	1000		1.15		
	2000		1.25	1.7	
	3000		1.40		
	4000		1.40		
	6000		1.90		
Active Directivity	20-6000		13		dB
DC Supply Voltage		4.8	5.0	5.2	V
DC Supply Current			103	115	mA



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.


REV. A
M124007
RTB-87/2
ZX60-V81+
RAV
121023
Page 2 of 4

Maximum Ratings

Parameter	Ratings
Operating Temperature	-40°C to 85°C Case
Storage Temperature	-55°C to 100°C
DC Voltage	5.5 V
Input RF Power (no damage)	20 dBm
Power Consumption	1 W

Permanent damage may occur if any of these limits are exceeded.







Outline Drawing

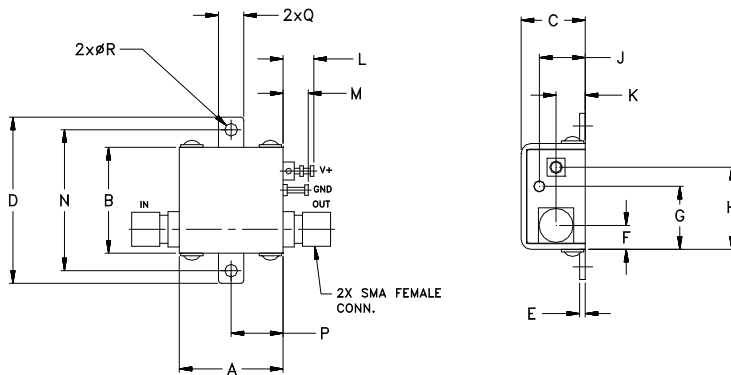

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	wt.
0.74	.75	.46	1.18	.04	.17	.45	.59	.33	.21	.22	.18	1.00	.37	.18	.106	grams
18.80	19.05	11.68	29.97	1.02	4.32	11.43	14.99	8.38	5.33	5.59	4.57	25.40	9.40	4.57	2.69	23.0

FREQUENCY (MHz)	GAIN (dB)	DIRECTIVITY (dB)	VSWR IN (:1)	VSWR OUT (:1)	POWER OUT @ 1dB COMPRESSION (dBm)	OUTPUT IP3 (dBm)	NF (dB)
20	10.57	10.23	1.19	1.38	17.89	38.23	7.24
100	10.47	10.00	1.10	1.09	18.64	40.29	7.53
420	10.39	10.16	1.10	1.07	18.93	39.27	7.70
1000	10.24	10.35	1.14	1.13	18.59	37.75	7.78
1220	10.14	10.48	1.15	1.16	18.57	37.42	7.80
1420	10.04	10.63	1.16	1.18	18.56	37.20	7.80
1620	9.93	10.77	1.18	1.20	18.67	37.08	7.79
2000	9.72	11.10	1.20	1.25	18.60	36.32	7.82
2220	9.60	11.27	1.21	1.27	19.31	36.02	7.84
2420	9.49	11.46	1.21	1.29	19.12	35.71	7.85
2620	9.36	11.62	1.21	1.31	19.33	35.45	7.88
3000	9.17	11.89	1.21	1.35	19.02	35.01	7.90
3420	8.96	12.21	1.19	1.38	18.90	34.24	7.88
4000	8.67	12.68	1.15	1.38	18.77	33.82	7.96
4420	8.49	12.91	1.16	1.39	18.47	33.17	8.05
5000	8.14	13.43	1.30	1.46	18.12	32.35	8.28
5420	7.75	14.00	1.52	1.61	17.83	31.68	8.41
6000	7.01	15.17	1.92	1.88	16.84	30.83	8.73
6620	5.92	16.71	2.46	2.16	15.96	29.90	9.08
7000	5.12	17.90	2.80	2.28	15.67	29.40	9.46

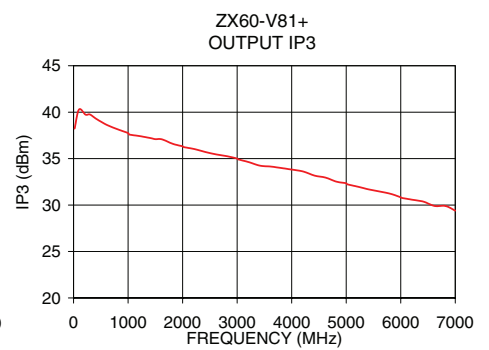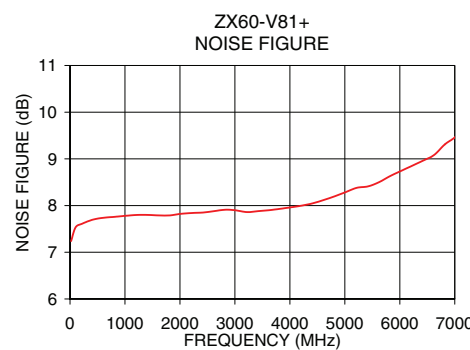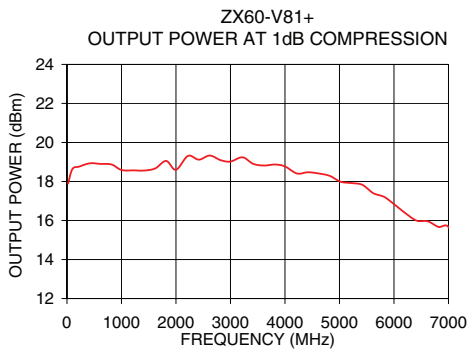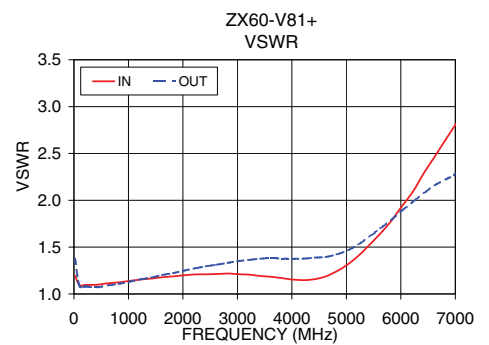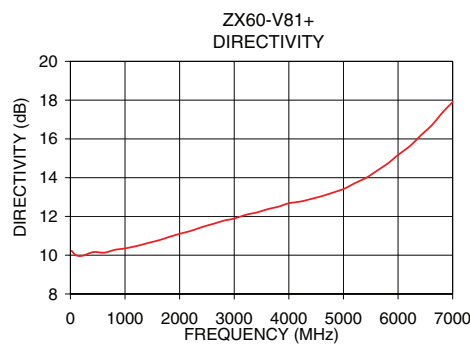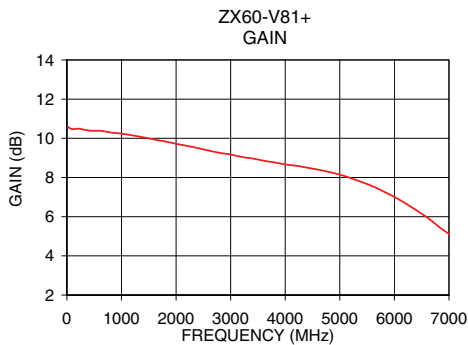

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.