


# Coaxial Fixed Attenuator

50Ω 1W 2dB DC to 2000 MHz

## Maximum Ratings

Operating Temperature	-45°C to 100°C
Storage Temperature	-55°C to 100°C
Permanent damage may occur if any of these limits are exceeded.	


## Outline Drawing

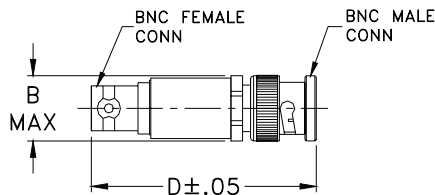

## Outline Dimensions (inch/mm)

B	D	wt
.62	1.94	grams
15.75	49.28	30.0

## Electrical Schematic

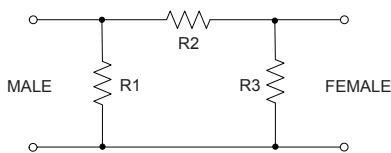

## Features

- excellent VSWR, 1.05:1 typ.
- excellent flatness, 0.15 dB typ. to 2000 MHz
- usable to 4000 MHz

## Applications

- PCS
- instrumentation
- cellular

HAT-2+  
HAT-2



CASE STYLE: FF747

Connectors	Model	Price	Qty.
BNC Male-BNC Female	HAT-2(+)	9.95 ea.	(1-9)

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



## Electrical Specifications

FREQ. RANGE (MHz)	ATTENUATION (dB) Flatness*					VSWR (:1)			MAX. INPUT POWER (W)
	DC-0.5 GHz	DC-1 GHz	DC-2 GHz	Total Band Typ.	DC-0.5 GHz	DC-1 GHz	DC-2 GHz		
$f_L - f_U$	Nom.	Typ.	Typ.	Typ.		Typ.	Typ.	Typ.	
DC-2000	2±0.2	0.05	0.10	0.15	0.25	1.05	1.10	1.10	1.0

\* Flatness = variation over band divided by 2.

## Typical Performance Data

Frequency (MHz)	Attenuation (dB)	VSWR (:1)
10.00	1.99	1.00
50.00	2.01	1.01
100.00	2.02	1.02
250.00	2.06	1.03
500.00	2.08	1.06
750.00	2.11	1.07
1000.00	2.16	1.08
1500.00	2.18	1.07
1750.00	2.20	1.05
2000.00	2.22	1.01

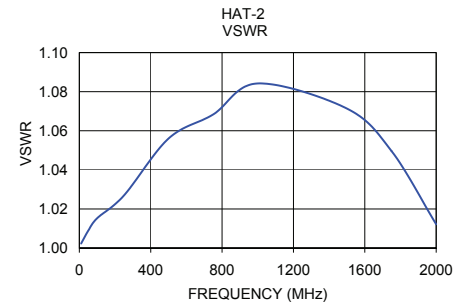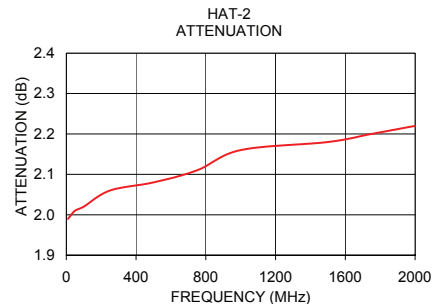

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 35166, Brooklyn, NY 11235-0003 (718) 934-4500 [sales@minicircuits.com](mailto:sales@minicircuits.com)

REV. E  
M98898  
EDR-5087/1-15  
HAT-2  
RVN/LC/CP/AM  
130920