

# High Pass Filter

VHF-7150+

50Ω 7900 to 11000 MHz

## Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

RF Power Input\* 6W max. at 25°C

\*Passband rating, derate linearly to 3W at 100°C ambient.

Permanent damage may occur if any of these limits are exceeded.

## Features

- Rugged uni-body construction, small size
- 5 sections
- Temperature stable
- Excellent power handling, 6W
- Low cost

## Application

- Sub-harmonic rejection and DC blocking
- Transmitters/Receivers
- Lab use




CASE STYLE: FF704

Connectors	Model	Price	Qty.
SMA	VHF-7150+	\$24.95 ea.	(1-9)

## +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

## Outline Drawing

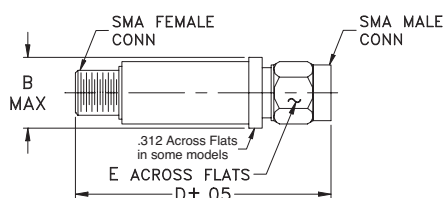


## Outline Dimensions (inch mm)

B	D	E	wt.
.410	1.43	.312	grams
10.41	36.32	7.92	10


## High Pass Filter Electrical Specifications (T<sub>AMB</sub> = 25°C)

STOPBAND (MHz)		fco, MHz Nom.	PASSBAND (MHz)		VSWR Typ.		NO. OF SECTIONS
(Loss>30dB)	(Loss>20dB)	(Loss 3dB)	(Loss<1.5dB)	(Loss<2dB)	Stopband	Frequency	
Typ. DC-F1	Min. DC-F2	Typ. F3	Typ. F4-F5	Max.	(MHz) 1.5:1		
DC-5100	DC-6150	7150	8500-10500	7900-11000	20:1	7250-11000	5

## Typical Frequency Response

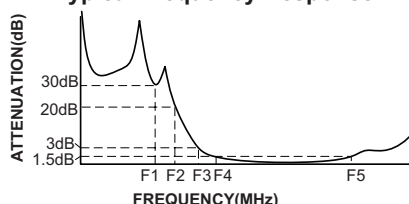


## Electrical schematic

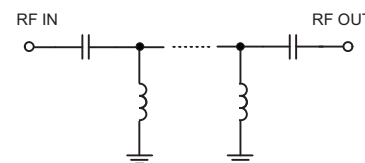


## Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
50	64.41	1737.18
1060	35.25	144.77
2800	30.63	86.86
4160	46.10	59.91
5100	28.66	42.38
6000	25.15	28.49
6150	27.88	25.56
6650	13.32	11.31
7150	1.94	1.73
7250	1.45	1.40
7900	0.77	1.07
8500	0.73	1.27
10500	0.68	1.15
11000	0.65	1.25
12000	1.56	2.48
15000	3.21	4.57
18000	8.97	10.89

VHF-7150+  
INSERTION LOSS

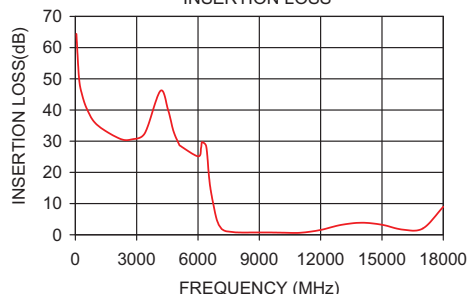

VHF-7150+  
VSWR

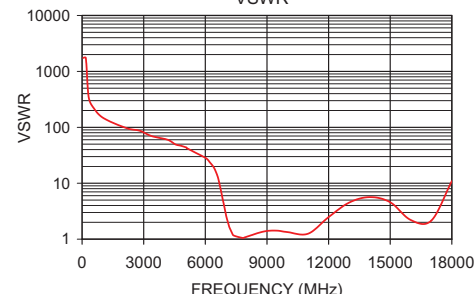

**Mini-Circuits®**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED  
IF/RF MICROWAVE COMPONENTS

For detailed performance specs  
& shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

REV. A  
M129173  
EDR-7909/3  
VHF-7150+  
RAV  
121017  
Page 1 of 1