

Surface Mount Frequency Mixer

RMS-25MH+ RMS-25MH

Level 13 (LO Power +13 dBm) 5 to 2500 MHz



Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

LO	1
RF	4
IF	5
GROUND	2,3,6

Features

- excellent L-R isolation, 32 dB typ.
- conversion loss, 7.0 dB typ.
- small size, 0.25"x0.31"x0.2"

Applications

- cellular
- satellite distribution
- GPS


CASE STYLE: TT240

PRICE: \$9.95 ea. QTY (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


Outline Drawing

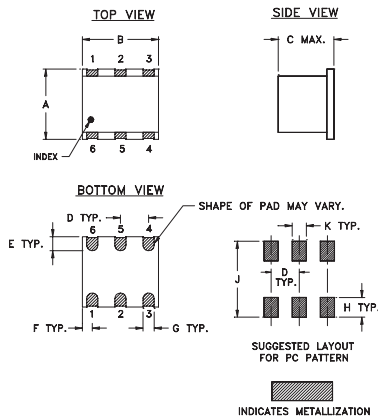

Outline Dimensions (inch/mm)

A	B	C	D	E	F	
.250	.31	.20	.100	.050	.055	
6.35	7.87	5.08	2.54	1.27	1.40	
G	H	J	K		wt	
.040	.070	.270	.050		grams	
1.02	1.78	6.86	1.27		0.50	

Demo Board MCL P/N: TB-03
Suggested PCB Layout (PL-052)

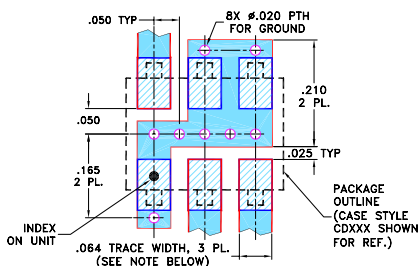

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. B
M102713
RMS-25MH
061228
Page 1 of 2

Electrical Specifications

FREQUENCY (MHz)	CONVERSION LOSS (dB)	LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)						IP3 at center band (dBm)
		L		M		U		L		M		U		
LO/RF	IF	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.
$f_L - f_U$	\bar{X} σ Max. Total Range Max.	54	28	32	23	32	20	34	23	32	25	28	17	17
5-2500	5-1500	7.0	.20	8.5	9.8									

1 dB COMP: +9 dBm typ.

For phase detection, DC output positive with in-phase RF & LO.

L = low range [f_L to $10 f_L$]

m = mid band [$2 f_L$ to $f_U/2$]

M = mid range [$10 f_L$ to $f_U/2$]

U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +13 dBm	LO +13 dBm	LO +13 dBm	LO +13 dBm	LO +13 dBm
5.00	35.00	6.60	43.66	31.16	1.43	2.14
10.10	40.10	6.47	48.02	33.66	1.42	2.07
20.18	50.18	6.42	53.20	34.80	1.42	2.09
33.51	63.51	6.47	56.82	34.60	1.42	2.09
49.03	79.03	6.46	59.20	34.63	1.42	2.08
81.42	111.42	6.50	57.10	34.59	1.42	2.06
135.23	165.23	6.58	52.43	34.78	1.45	2.08
224.60	194.60	6.60	46.08	35.72	1.52	2.08
373.01	343.01	6.77	40.43	37.11	1.71	1.95
480.71	450.71	6.88	38.16	36.46	1.86	1.92
545.72	515.72	6.82	37.54	35.91	1.95	1.80
798.38	768.38	6.92	36.87	32.89	2.23	1.71
906.34	876.34	6.92	37.27	31.38	2.32	1.62
1168.03	1138.03	7.19	36.90	30.53	2.35	1.61
1250.00	1220.00	7.10	38.52	31.35	2.37	1.62
1505.28	1475.28	6.78	39.76	30.96	2.27	1.65
1800.00	1770.00	6.85	31.84	27.67	2.24	1.57
2000.00	1970.00	7.07	28.62	28.09	2.19	1.62
2200.00	2170.00	7.09	25.62	28.13	2.18	1.77
2500.00	2470.00	7.52	22.96	26.44	1.95	1.99

Electrical Schematic

