


X2 Frequency Multiplier

50Ω Output 3200 to 4400 MHz

KBA-20+
KBA-20



Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	200mW
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections


INPUT	10
OUTPUT	5
SAMPLE*	3
GROUND	1,2,4,6,7,8,9

* Sample port output power, -10 dBc typ.
Terminate in 50 ohms if not used.

Outline Drawing

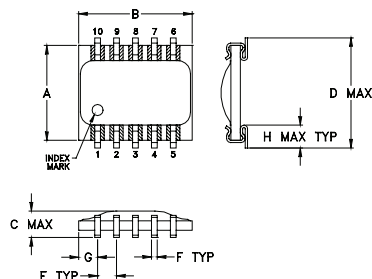

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002
ADJACENT GROUND PINS SHALL BE CONNECTED
TO EACH OTHER AND TO GROUND PAD

Outline Dimensions (inch)

A	B	C	D	E	F	G	H	
.250	.300	.095	.290	.050	.015	.050	.060	
6.35	7.62	2.41	7.37	1.27	0.38	1.27	1.52	
J	K	L	M	N	P	Q	R	wt
.030	.080	.300	.100	.020	.015	.070	.014	grams
0.76	2.03	7.62	2.54	0.51	0.38	1.78	0.36	0.3

Demo Board MCL P/N: TB-99 Suggested PCB Layout (PL-066)

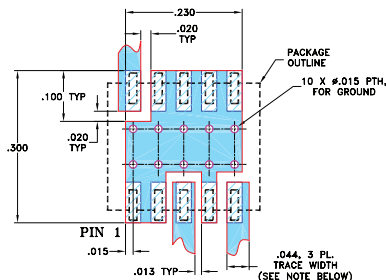

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B
WITH DIELECTRIC THICKNESS 0.020" ± 0.0015".
COPPER: 1/2 OZ., EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED
TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK
OVER BARE COPPER)

■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low conversion loss, 12 dB typ.
- low profile, 0.070" max.
- aqueous washable
- protected by US patent 5,534,830

Applications

- synthesizers
- local oscillators

CASE STYLE: SM2

PRICE: \$9.95 ea. QTY (10-49)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications

Electrical Specifications

MULTIPLICATION FACTOR	FREQUENCY (MHz)		INPUT POWER (dBm)	CONVERSION LOSS (dB)	*HARMONIC OUTPUT (dBc)					
	F1 Input	F2 Output			F1 Typ.	F1 Min.	F3 Typ.	F3 Min.	F4 Typ.	F4 Min.
2	1600-2200	3200-4400	Min. Max.	Typ. Max.	12	7	20	13	23	10

* Harmonics of input frequency below the power level of F2

Typical Performance Data 25°C

Input Frequency (MHz)	Conversion Loss (dB)	Harmonic Output (-dBc)			
		F1	F3	F4	
1600.00	12.49	10.21	23.69	22.41	
1700.00	12.07	11.36	22.56	24.44	
1750.00	11.92	11.20	22.00	22.24	
1800.00	11.70	12.27	23.75	22.35	
1850.00	11.55	12.67	24.11	22.75	
1900.00	11.38	13.23	23.71	21.07	
1950.00	11.55	14.25	24.05	20.49	
2000.00	11.60	14.11	22.15	18.03	
2100.00	11.56	13.51	21.61	15.05	
2200.00	11.74	11.80	23.02	14.68	

